



# STUDENT MANUAL

By  
Naasha Pithawalla  
and  
Khushroo Pithawalla

# WELCOME TO PARAGLIDING BAWAS

**What is this manual for?**

This manual is intended to give students the information required at each level of their paragliding journey.

Please go through the theory since it is crucial information for safety, progress in the sport and there will also be material for your theory exam for your pilot rating.

**What Paragliding Bawas has to offer?**

We are passionate paragliding instructors who wish to introduce the sport to as many individuals as possible. We have done our level best to make training feasible and individualized for all our students.

Some students pick up fast and others a bit slower, we cater and plan for all rates of learning with a aim to make pilots independent as soon as possible.

We have trained pilots from the age of 14 to the age of 67. We love to meet all types of individuals and share the joy of paragliding with the world.

Come join us on this amazing journey.

**To know more about us?**

**Call-+91 9820911994**





# LIST OF CONTENTS

---

04 Equipment

---

10 How the glider flies

---

17 Take-off and landing techniques

---

24 Weather

---

57 Site assessment

---

59 Flight analysis / Log book

---

60 Reserve deployment , emergency procedure, PLF

---

64 Difference types of flying

---

75 Inflight tasks

---

78 Air law

---

79 Flight characteristics, and Recovery methods

---

82 Human factors

---

83 Buying equipment

---

85 Equipment maintenance

---

89 Air space

---

# EQUIPMENT



# Paraglider




## CANOPY

The canopy is made of materials like Nylon and Polyester  
A paraglider has top and bottom surface, along with multiple cell walls inside the canopy. The structure of the canopy helps maintain pressure inside the glider keeping its shape. The design of the canopy is also responsible for reinflating the collapsed side.

## LINES

Lines are made of Kevlar and Dynema. The lines are used to maintain the glider's shape, distribute weight as required, and control the glider. Small changes in line lengths can cause a change in glider behavior

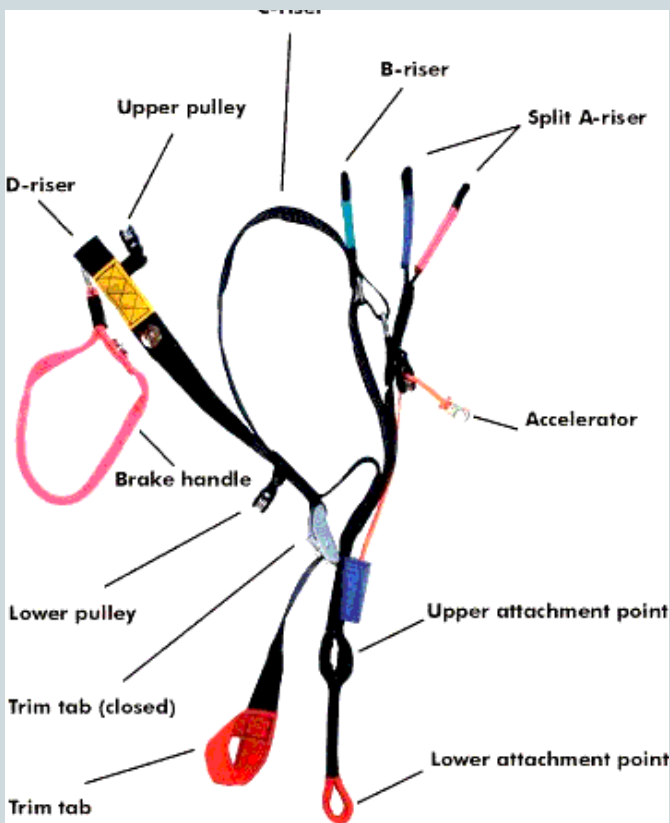

## RISERS


Risers are the hard webbing that connects the harness. It also has maillions connected to the top which form a bridge to connect the risers to the lines.

The risers are further divided into 3 sections- A,B,C and the the control toggles or brake lines. (advanced paragliding models have just 2 risers) They also have a pully system that is attached to the speed bar

# Harness



# Reserve

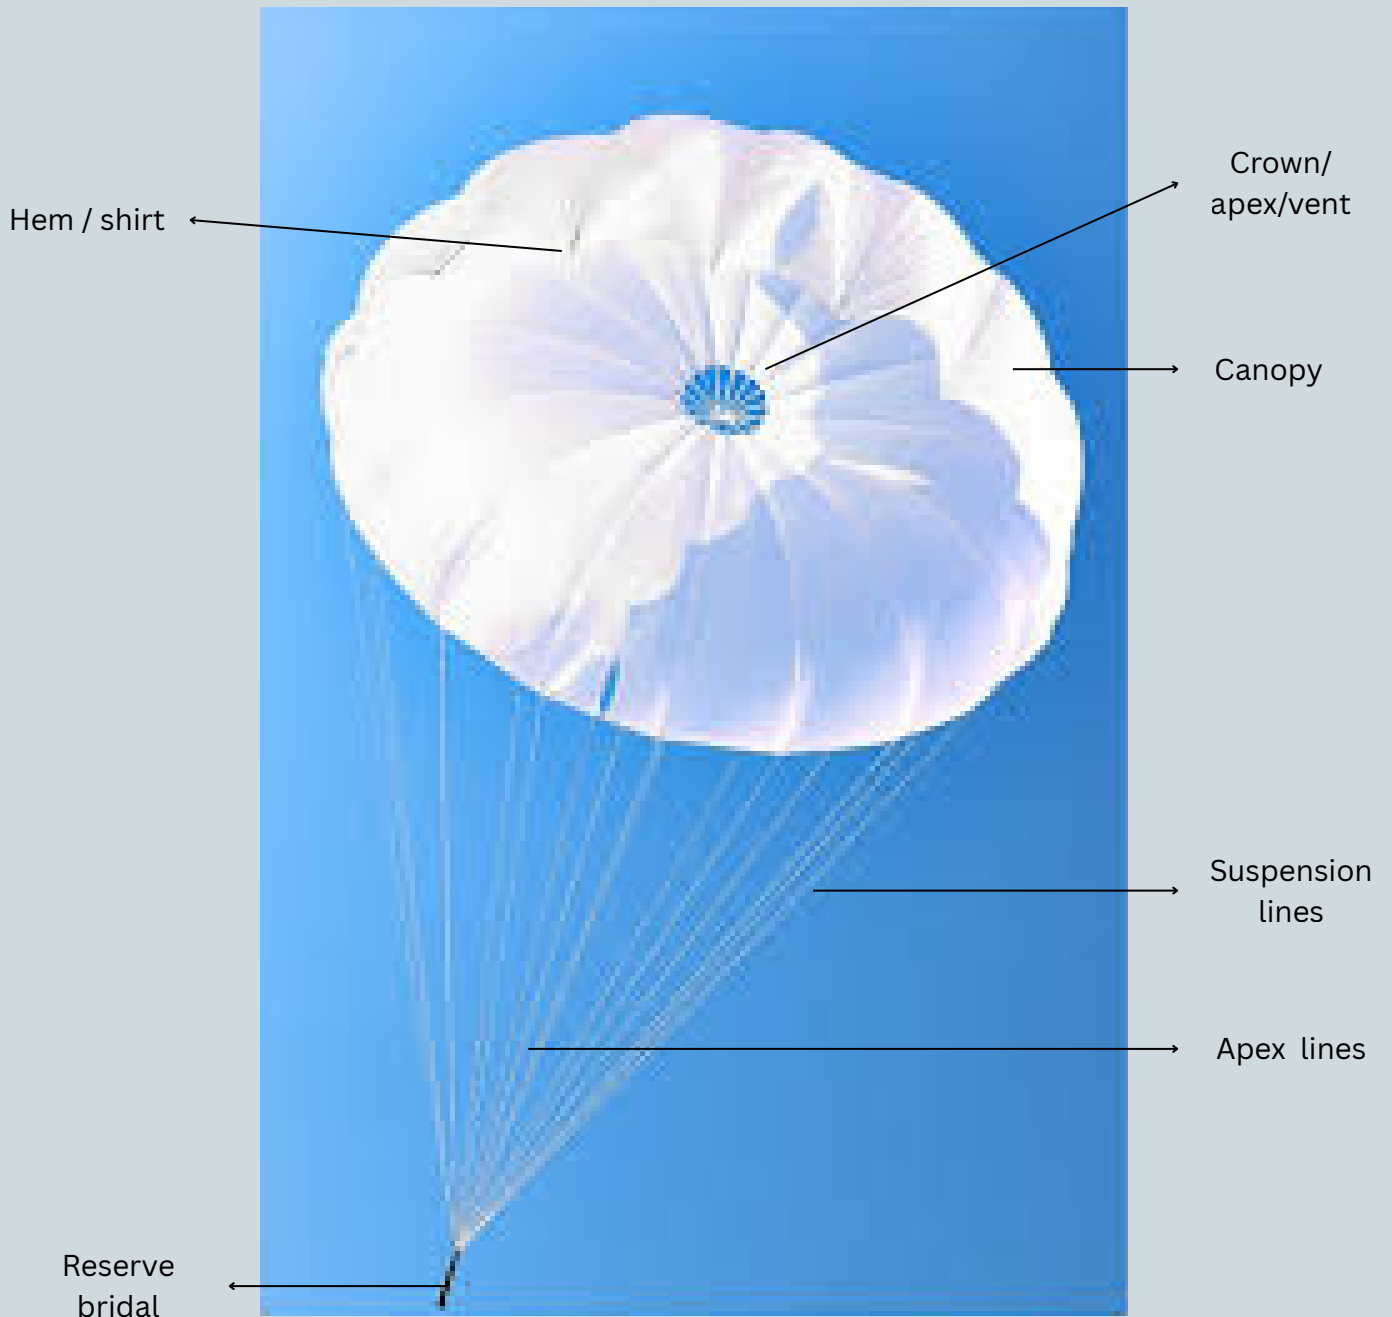

# Helmet



Half face helmet

- Open feel
- full vision
- No jaw protection

Full face helmet



- Closed feel
- Restricted vision
- Jaw protection



# Other equipment

**Radio**




**Compass**

**Vario**



# How the glider flies?

## Aerodynamics

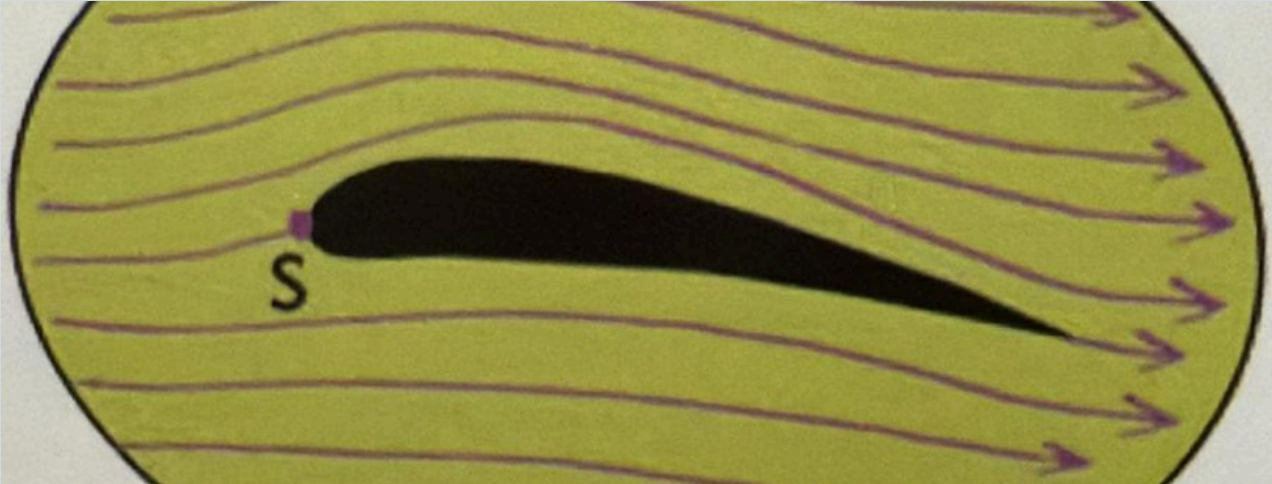


**Bernoulli's Principle** states that as the speed of a fluid (like air) increases, its pressure decreases.

**In paragliding**, this principle helps explain how lift is generated. When air flows faster over the curved top surface of the wing (canopy) than the flatter bottom, the pressure on top becomes lower than the pressure below. This pressure difference creates lift, allowing the paraglider to stay aloft. It's the same principle that helps airplanes and birds fly.

# Air, wind, and ground speed

## Aerodynamics

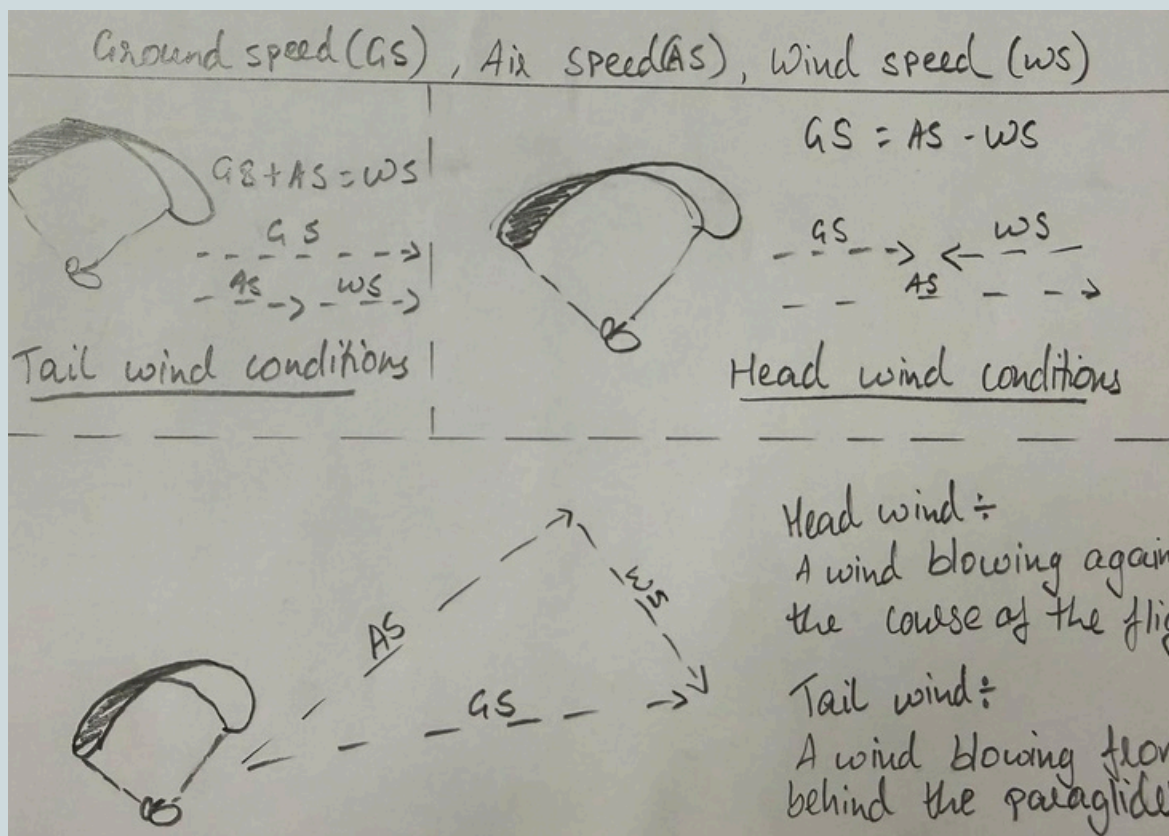

### Airspeed

Airspeed is the speed of an aircraft (or paraglider) relative to the surrounding air mass. It is the speed at which the wing moves through the air and determines lift, stall speed, and aircraft performance.

### Wind speed

Wind speed is the speed at which the air itself is moving relative to the ground. It is usually measured at a fixed point on the earth and described with a direction (e.g., 15 km/h headwind).


### Ground speed

Ground speed is the speed of the aircraft relative to the ground. It is how fast the aircraft actually moves over the earth's surface.

### Relationship between them:

- Ground speed = Airspeed  $\pm$  Wind speed
  - Headwind  $\rightarrow$  ground speed decreases
  - Tailwind  $\rightarrow$  ground speed increases



# Forces on a paraglider

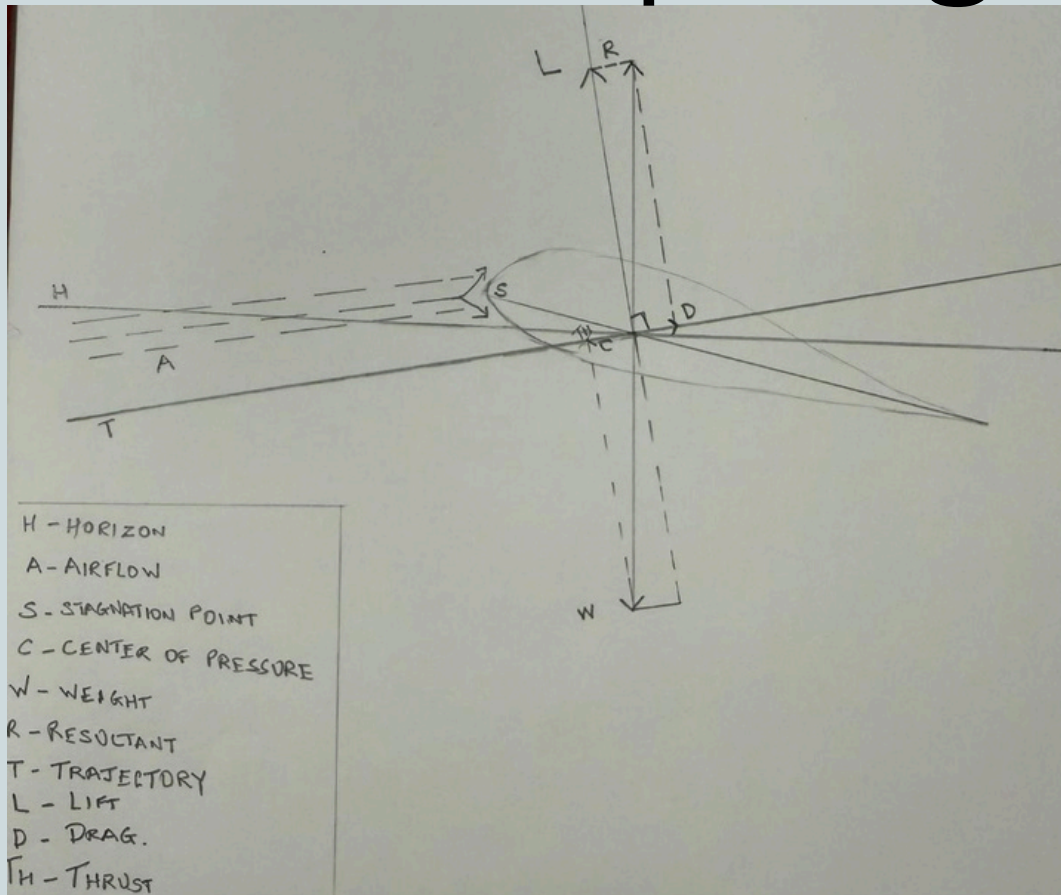

A brief explanation of the aerodynamic forces acting on a wing.


Wing has weight and is moving through air, air separates and goes over and under the wing. the wing shape creates low pressure above and high pressure below creating an upward force to balance weight. this upward force is a result of two aerodynamic forces called lift and drag. lift is  $90^\circ$  to airflow and drag is in the direction of the air flow. Weight creates thrust which gives the forward movement. All these forces act on one point called center of pressure. The above picture shows magnitude and direction of all these forces. A change in AOA will change these forces and you should draw these diagrams to understand what happens when we change AOA by brakes and speedbar.

# AOA - angle of attack (representation)

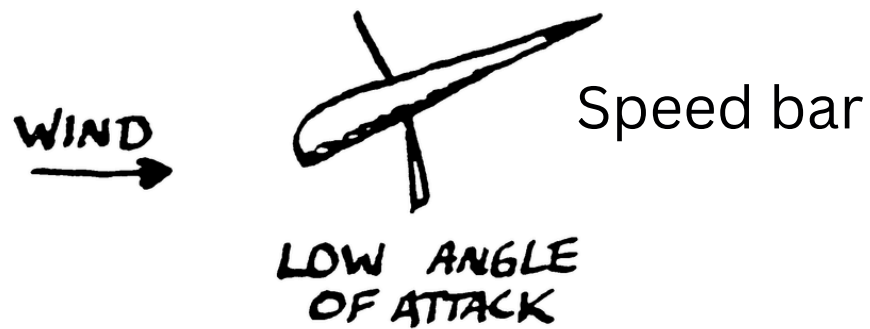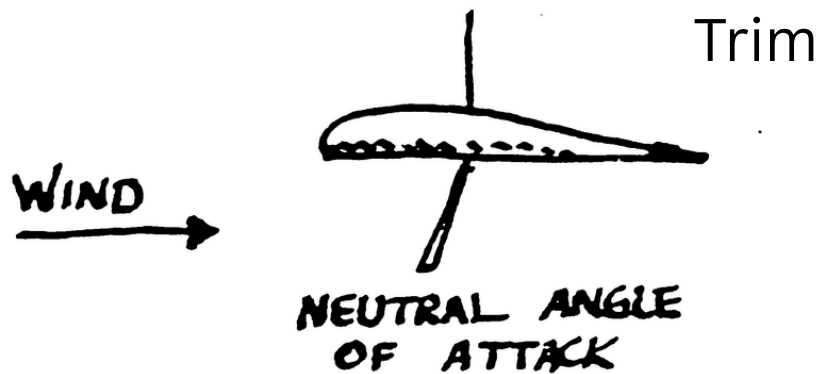


# How a paraglider turns

Rear View of Conventional Aircraft, Neutral Controls

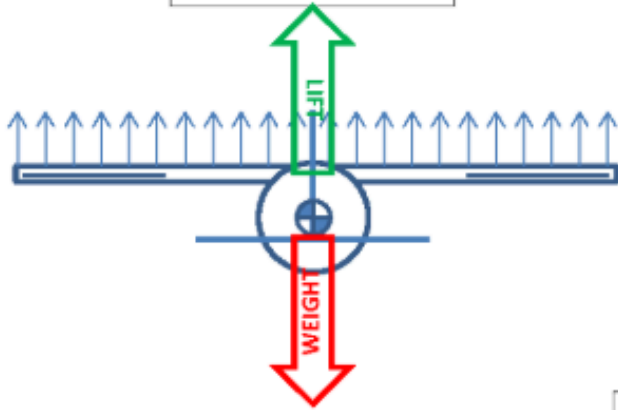


Rear View of Conventional Aircraft, Right Aileron Down, Left Aileron Up = Net Left Roll Moment about CG

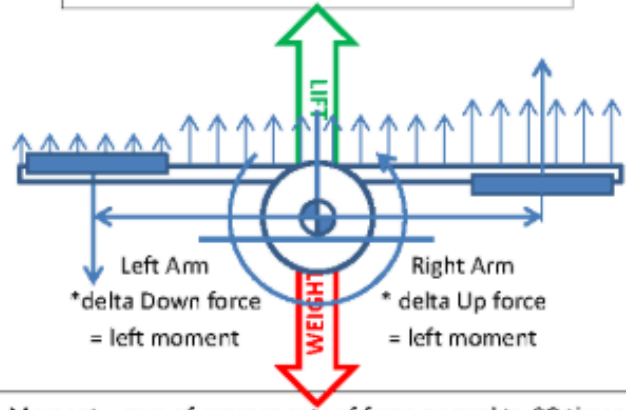


Moment = sum of components of force normal to CG times their arm to CG= large Left Roll Moment for Left turn

Note that Increased Right Drag/Decreased Left Drag also causes right Yaw moment. In conventional aircraft this is a nuisance (called Adverse Yaw) that is counteracted by left rudder input. **But for Paragliders this yaw moment is the primary effect that turns us Right, the direction we want to go**

Rear View of Paraglider, Neutral Controls

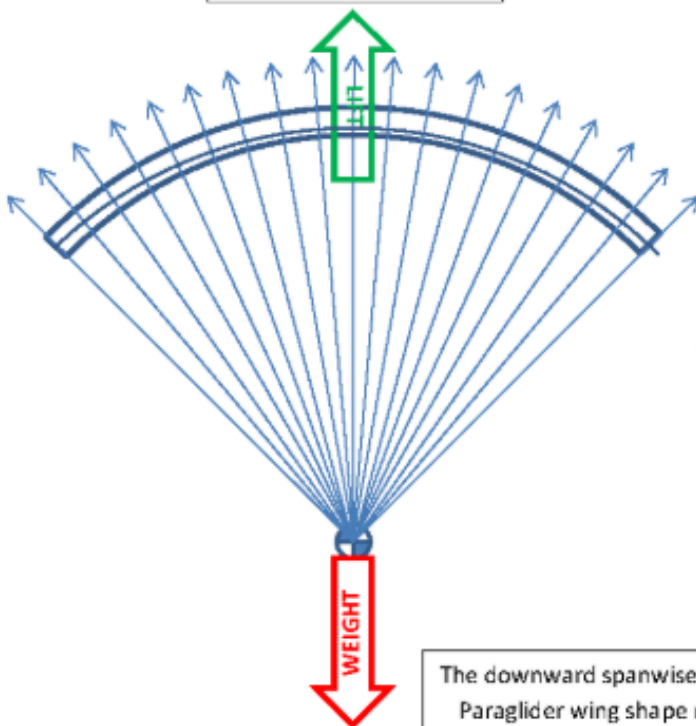

Rear View of Paraglider, Right Brake Down, Left Brake Up = Negligible Left Roll Moment about CG

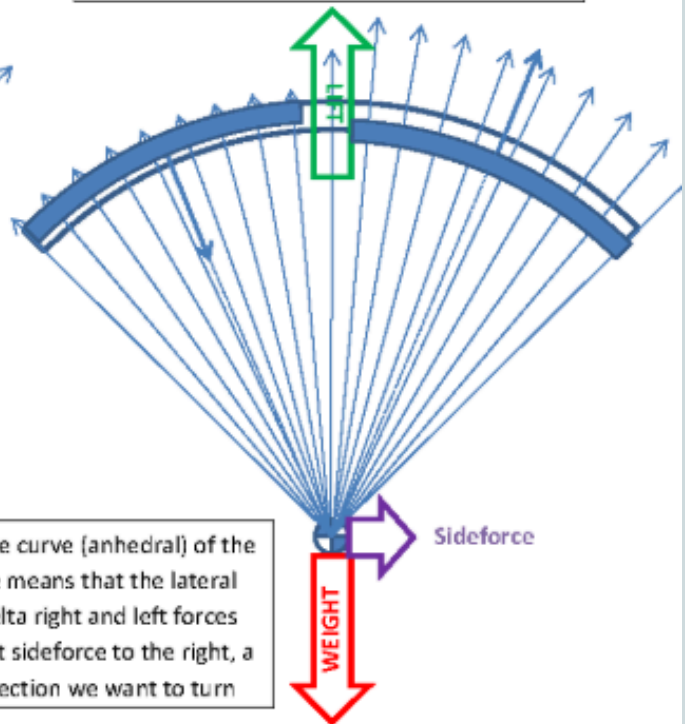

The downward spanwise curve (anhedral) of the Paraglider wing shape means that the lateral components of the delta right and left forces also result in a small net sideforce to the right, a bonus force in the direction we want to turn

It is really interesting to understand how a paraglider turns because a comparable input to any other aircraft turns the aircraft in the opposite direction. If you compare our controls as ailerons, any downward movement raises the wing upwards while our paragliders seem to do the exact opposite.

While most explanations say that the drag created by our controls slows down that side and is responsible for the turn, this explanation is far from complete as it indicates a turn with a yaw movement while what we experience is a roll movement.

There are two major differences between paragliders and other fixed wing aircrafts. The shape of our wing and the pilot hanging from the wing at a distance from the wing.


When we initiate a turn, either by weight shift or by control line, just like any other aircraft the aerodynamic forces on that side increase.

Now the shape of the glider comes into play. Since it's a curved shape the force is towards the side of the increase. This initiates a movement towards that side.

Now comes the second part, since the pilot is hanging below with soft links (lines), inertia of the pilot takes him forward, this establishes the bank angle with centrifugal forces creating an equilibrium and the glider continues to turn.

This explains why a paraglider behaves differently from all other fixed wing aircrafts and the mechanics of a paraglider in a turn.

# 3 AXES OF THE GLIDER

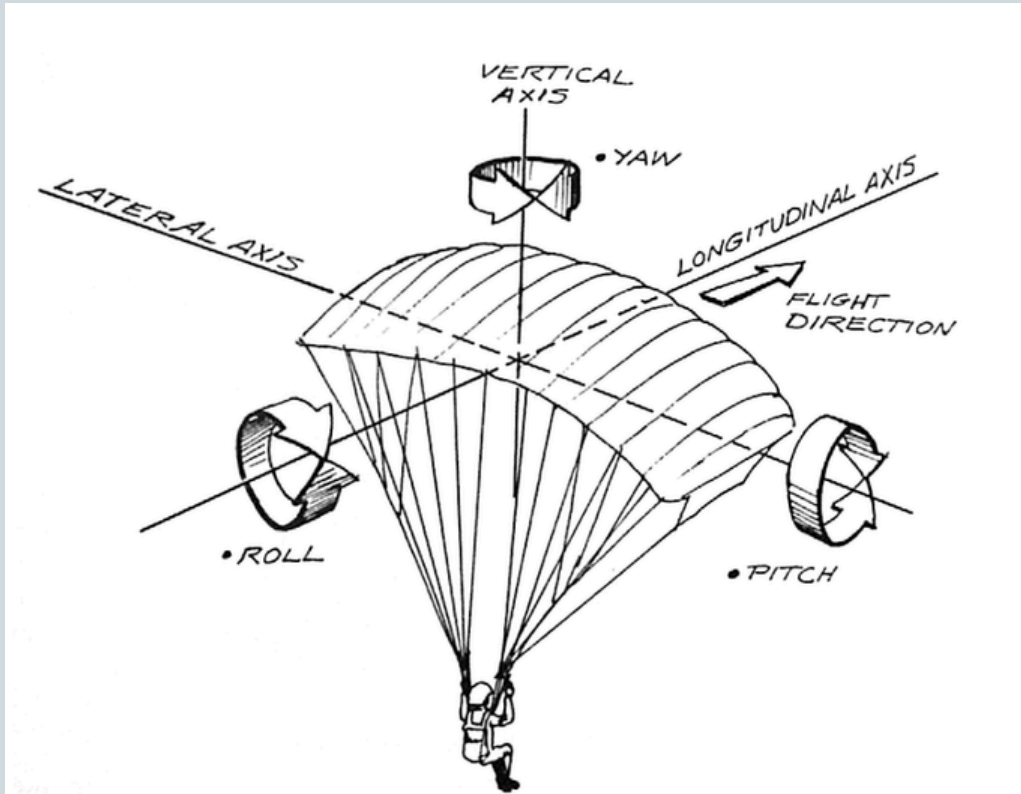

**PITCH**  
Movement around the lateral axis is called pitch. It's the most important to control as uncontrolled pitch can cause serious consequences.


## ROLL

Movement around the longitudinal axis is called roll. The glider moves from side to side. Roll reduces flight efficiency and can be dangerous close to the ground while landing or flying.

## YAW

Movement around the vertical axis is called Yaw. This does not happen in normal flight but can accidentally happen if the control on one side is pulled down beyond a certain level.

# Polar curve

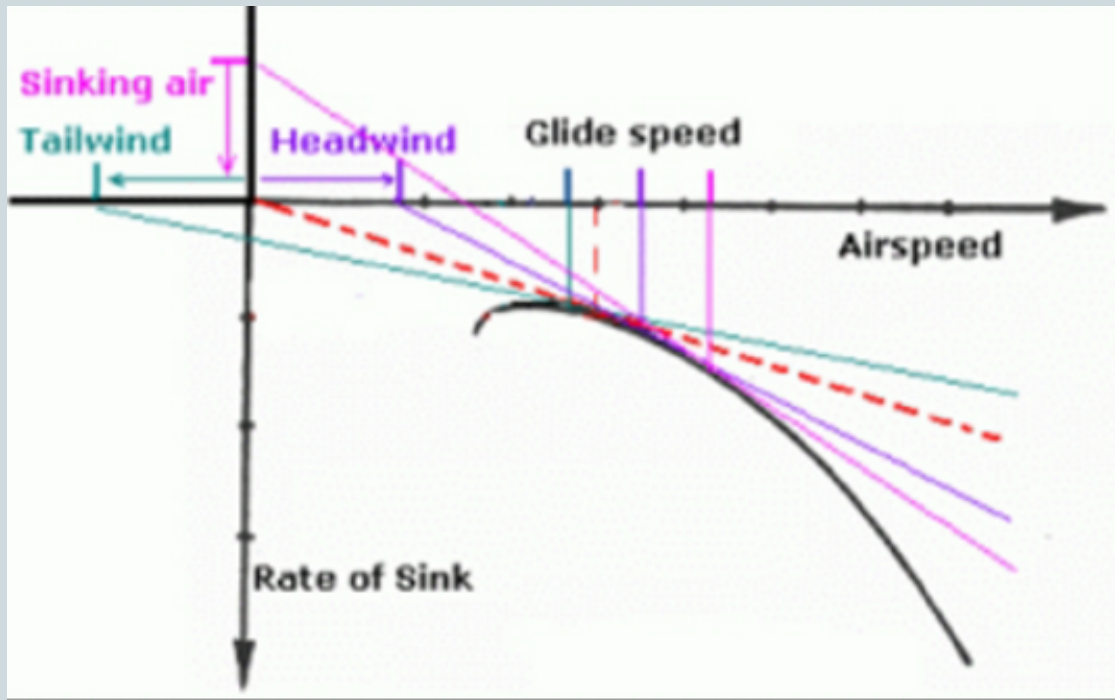

## Want to fly far, understand the polar curve.

The polar curve is a graph of horizontal speed vs vertical speed. It looks like a shape of a wing and often gets pilots confused. Its probably the most misunderstood theory in glider flying.

To use a polar curve, you need to have a polar curve for your wing, to have one, you have to create one.

Take a few flights in nil wind conditions with an instrument(Variometer) which shows airspeed and sink rate(Airspeed = Ground speed since wind speed is zero). Note down Airspeed, sink rate and brake levels as you move from trim speed to 10%, 20%, 30% and so on till you reach stall point. (if you are not trained in stall recovery, 60% of brake will still give you enough data). Similarly take the data on speed bar at various levels. Plot this data on a graph with Airspeed on X axis and Sink rate on Y axis and Voila, you have your Polar Curve.

Now its simple, to get best glide, draw a tangent from the wind speed you are flying in. Headwind(on the positive side) and tailwind (on the negative side). The polar curve will tell you at what airspeed you should be flying and at what position of brakes or speed bar you get that airspeed.

Similarly for sinking or rising air, draw a tangent for sinking air (on the positive side of the Y axis) and vise versa.

Pilots who do not have the understanding of the polar curve can remember a rule, fly fast in headwind and sink, fly slow in tailwind and lift.

Pilots who apply the learnings of the polar curve will consistently out fly and land accurately than pilots who don't.

# Take-off and Landing techniques

## 1-Forward kiting

# KITING THE PARAGLIDER.

On the first day of paragliding training, one of the most important skills you'll learn is kiting the paraglider and stabilizing it to launch position. This foundational exercise helps you understand how to control the glider on the ground before you take to the skies.

Kitting involves inflating the paraglider canopy (or wing) bringing it overhead and keeping it stable while standing in a forward-facing position. Here's how it works

Lets have a look at the forward take off procedure:

1. **Laying Out the Wing:** You'll begin by spreading the glider out on the ground in a horseshoe shape, ensuring that the lines are clear of tangles and the canopy is ready for inflation. Proper setup is crucial for a smooth launch.
2. **Connecting the Harness:** After inspecting the glider, you'll securely connect the risers to your harness, double-checking for correct orientation and safety.
3. **Facing Forward:** In the forward launch position, you'll stand facing into the wind with the A risers and brakes in your hands, ready to guide the glider. This position allows you to inflate the wing while running forward.
4. **Inflating the Canopy:** As you move forward, the air fills the wing, causing it to rise overhead. During this process, you'll learn to use gentle pressure on the risers and maintain balance to keep the glider steady. The rate of your run depends on the speed of the wind, the more wind the slower the run required, and visa versa.
5. **Controlling the Wing:** Once the wing is overhead, you'll practice keeping it centered and stable using subtle movements of your hands and body. This teaches you how to anticipate and correct any shifts caused by wind or improper alignment. Move with the glider and pull opposite brake.

Deflate the glider by pulling both brakes first, then release for a second and turn around to face the glider, then pull down both brakes while walking to the lower side of the glider. You can also pull both brakes down and hold while facing forward, however after a little time, you should be able to turn around quite easily.



Kitting in the forward launch position is an essential step in building your confidence and understanding of how the paraglider responds to your inputs. By practicing this skill, you'll develop the foundation needed for successful takeoffs and safe, controlled flying, it also gives you an idea of how to control the glider on landing.

This is your first chance to feel the power of the wing and experience the magic of paragliding!

## 2- Reverse kiting

# ALTERNATIVE KITING METHOD

Some students prefer to be able to look at their gliders during the inflation stage

Even though this take off has the advantage of being able to look at your glider during inflation, it is more challenging to learn than the forward take-off.

The steps for this type of take off are a little different than the forward take off, let's have a look:

1. **Laying Out the Wing:** Start by laying down the glider in the horse shoe shape and clearing the lines. place the risers on correct sides.
2. **Connecting the Harness:** Put on the harness and helmet and conduct a safety check of the buckles. Now pick up the risers, and hold them together, twist them to the side you plan to turn, left twist for right handed people and right twist for left handed. connect the risers to the carabiners exactly in that manner.
3. **Facing the glider:** Hold the A risers, rear risers, and brake of control toggles in the correct hands. balancing the glider in a way that the center comes up first followed by the tips, inflate the glider gradually, ensure to control it in a way that it comes up straight and not from one side.
4. **Balance the Canopy:** Once the canopy is overhead balance and stabilize the glider. Once the glider is stable, leave the risers and turn around. load the glider as soon as you are in the forward position, balance the glider again.
5. **Accelerate to take off:** After stabilizing the glider in the forward position, slowly accelerate to take off.

**Deflate the glider:** This is done the same way as the forward inflations. By pulling both brakes first, then release for a second and turn around to face the glider, then pull down both brakes while walking to the lower side of the glider. You can also pull both brakes down and hold while facing forward, however after a little time, you should be able to turn around quite easily.



Kiting in the reverse launch position allows a pilot to react to the glider on visual cues and not just in feel. We can understand the glider better and also understand how the glider behaves in the air, how much input is needed for what result.

Reverse kiting is a requirement for becoming an independent pilot.

# Safety procedure



## How Lucky are sailors because sailors can row well



- Horse shoe set up- set up the glider in a horse shoe shape, with leading edge and trailing edge clearly visible.
- Lines clear- make sure all lines are clear and no line over and cravats are present.
- Reserve pins- Both reserve pins should be clearly in place before putting on the harness.
- Straps- Both Leg loops , Chest strap, Comfort strap, Helmet. (4+1). Check all with a tug.
- Brake lines free- the trailing edge to the brake lines should be clear.
- Speed bar attached- speed system brummel hucks should be attached.
- carabiner check- check weatehr the carabiners are clearly locked in place, tap the mouth of the carabiner to be certain.
- Radio- Tuen on the radio/ walkitalki and give a verbal radio check to the instructors on the ground and at take off along with other pilots who are on the frequency
- Weather
- Any other equipment like Go-pro/vario/etc.

# First flights in 3 phases

First flights are the core objective of our beginner course since it is the key variable in learning to take-off and land in a safe environment. However during this phase things happen fast. You hardly get a few minutes in the air before landing so it is important to stay calm, be aware and alert, follow instructions communicated with you on the radio



These flights are short duration flights which focus on take off and landings in order to give you the feeling of getting lifted off the ground, and understanding the landing procedure. Pay attention to the briefings and follow the procedure we will be there guiding you through the process on radio contact.

## 1. Take off

- Pilots must conduct the safety procedure themselves. After its complete radio our instructor on the ground- Pre flight checks done, your name, location, and ready to take off)
- Now keep in mind these 5 steps during take off- Inflate, control, decide, accelerate, trajectory.

1-Inflate- the glider should be inflated correctly like practiced on the ground.

2-Control- the glider should be in your control at all times when over your head.

3-Decision- whether to take off or not? remember your stop line while making the decision.


4-Accelerate- If decision is to take off, accelerate with commitment. Look at where the wind is coming from and accelerate head on into wind. Do not jump or create sudden movements.

5-Trajectory- watch the angle at which you are leaving the ground. Wait in your take off position until you have enough height to get into flying position with your legs hanging down and your hands near your shoulders.

- Drift management- As you take off you will feel the glider going one way or the other, you are required to steer the glider to where you want it to go which is straight out of the ridge and facing into the wind.

Points to remember-

- a. Make smooth and slow switches from take off to flying position
- b. Shift only your upper body into flying position
- c. Avoid sitting and jumping when getting into the air or the flying position.

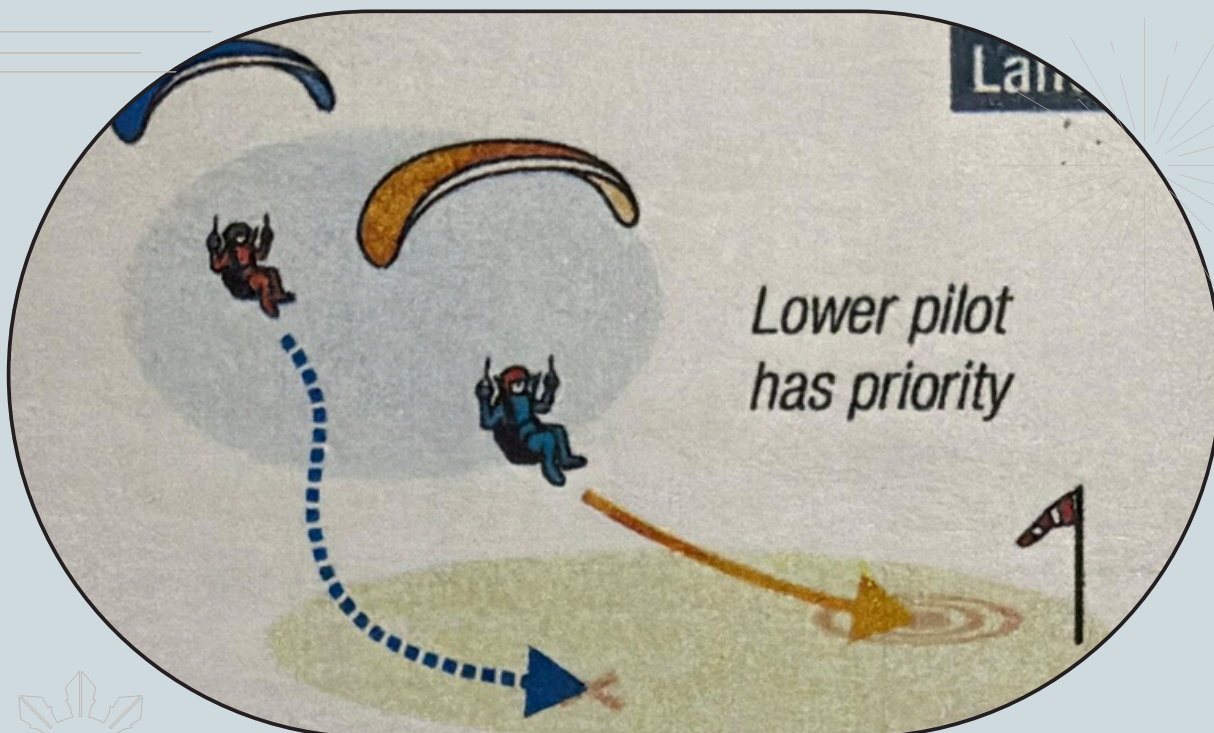

## 2. In-flight basics for 1<sup>st</sup> flight

- Staying calm is the key aspect to being safe. A deep breath goes a long way to achieve that.
- Keep flying straight until you clear the ground by at-least 15mts
- Look at the landing at all times and conduct your figure 8 and S turns as required. Keep your eyes on a nice open patch to land in order to avoid target fixation on obstacle.
- Look first, weight shift second and third use brake input.
- When in air the drift management is done by weight shifting to one side and progressively using brake to correct direction.
- Danger zone- If you get your hands bellow your ribcage you are now in the danger zone of accidently stalling your glider mid flight, remember to keep you hands above your ribcage. The glider requires you to pull the brakes only till your shoulders in order to initiate a turn
- Once you have lost enough height maintain the line straight into wind and keep flying straight until you see the ground coming close to you.

## 3. Landing tips


Remember, in the sport of paragliding Taking off is optional but landing is mandatory, if we take off we will land.

- It is important to aim the middle of a landing field in order to leave error margins both undershooting the targeted area and over shooting it.
  - When coming in to land you must be in the upright position, with one leg ready to touch down and run. Think of it as running out of a moving vehicle.
  - 2 important points during landing
- 1 is landing into the wind, and 2 is the final flare timing during touch down.
- The flare timing is mirrored by the rate at which the glider is coming to the ground. It is the complete applications of brakes when the ground is 5ft bellow you. If the ground is coming to you

at a fast rate, apply both brakes as fast as the ground is approaching you, when the ball of your foot touches the ground your elbows should be locked. If the ground is coming to you slowly pull both brakes slowly. Your elbows should be locked down then the ball of your foot touches the ground.

- Keep your legs ready to run when you touch down and run off any forward movement that exists after the flare
- Remember to touch down on the ball of your foot and not the heel to prevent knee and back injuries
- As you run deflate the glider like you did on your first day during kiting training.

### 3. Landing procedure

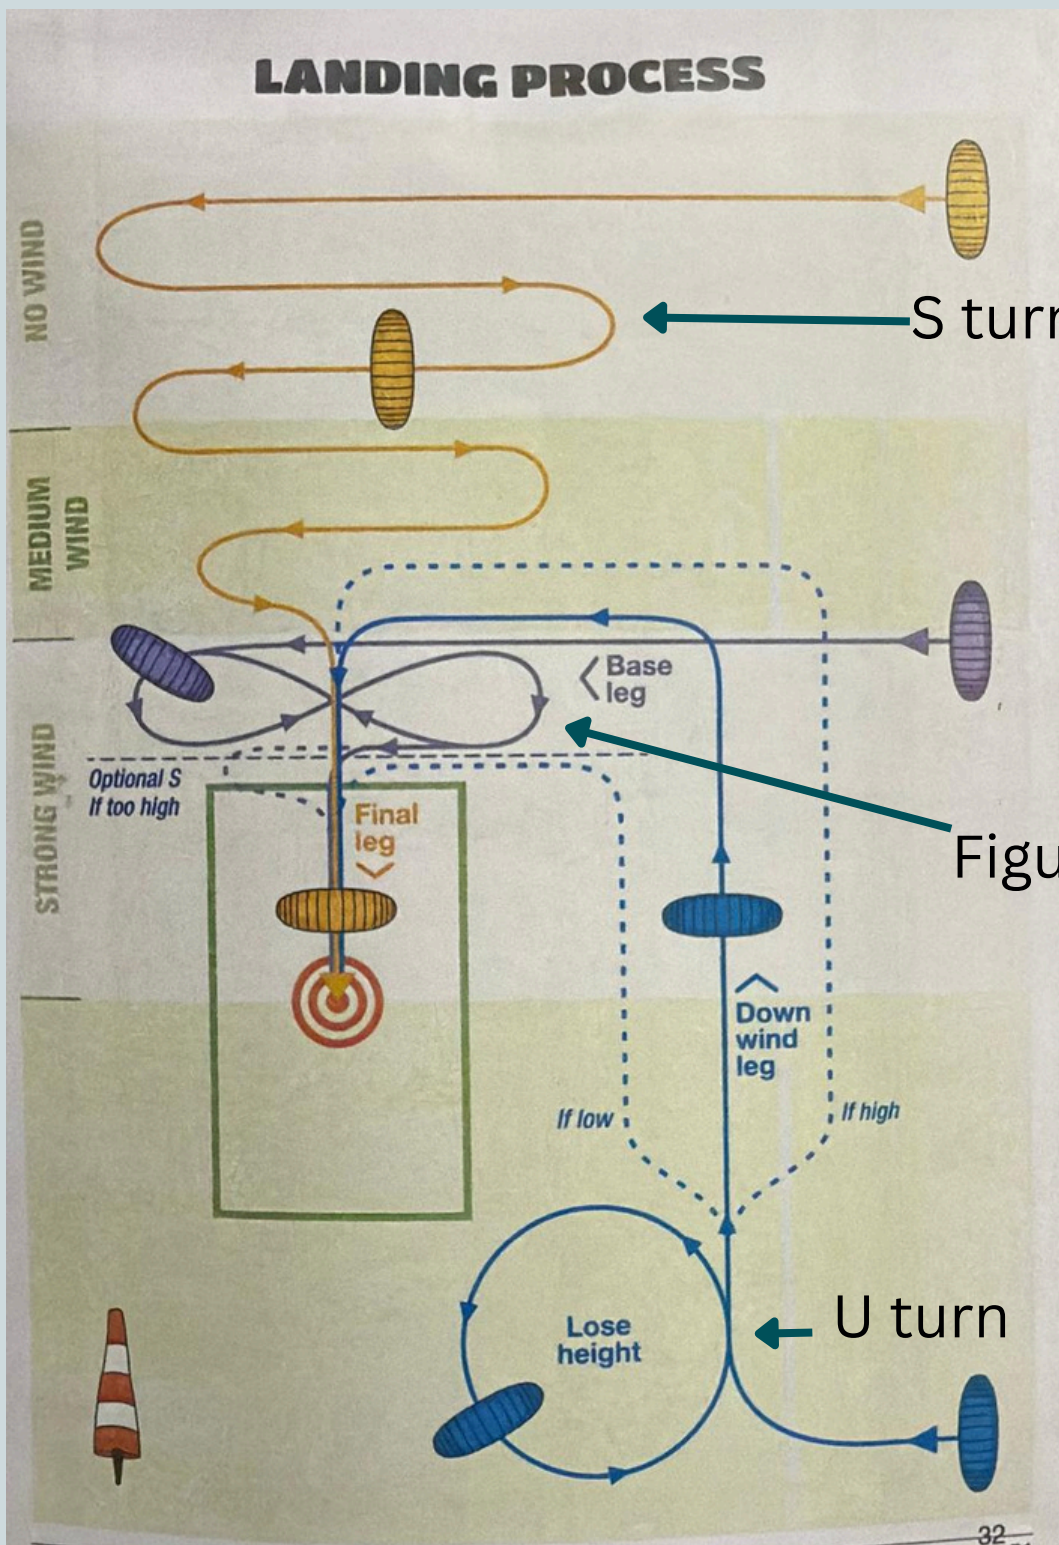

S turns

Figure 8

U turn

# FIRST FLIGHT BRIEFING

---





1. Take off the same way as we practiced on the ground. As you get picked up remember to keep your legs down and ready to run again, it is quite likely that you will touch the ground once again before flying off.
2. As you start flying look straight and fly away from the ridge until you have enough terrain clearance.
3. Depending on the amount of height you require to loose we will perform some figure 8 turns. for each turn wait for the instructions on the radio, look the side you want to turn, weight shift the side you want to turn, and progressively pull the same sides brake.
4. Play box, we must perform the figure 8 turns inside a play box described by the instructor in order to stay away from compression.
5. Danger zone, this is when you pull your brakes below your ribcage, when the brake is at the position you are in danger of stopping one side of the glider from flying, keep your hands above the ribcage at all times.
6. Be gentle on the brakes, we can always tell you to pull more brakes.
7. After loosing enough height we come to the S turns part of the flight, during this stage we are flying into the wind in a snaking pattern, this allows us to loose any extra height we might have.
8. At 10-15 ft from the ground we stop turning and come into landing straight and leveled. When you instructor says “this is your final” no more turns are to be made.
9. Wait for the ground to come to you, as the ground approaches start bringing your hands down at the same rate the ground is coming to you. When the ball of your foot touches the ground your elbows should be locked.
10. If you start getting your hands down and your glider picks you up simply freeze your hands until your glider reaches the same height and then continue getting your hands down.
11. Always attempt to land into the wind.


## Practical for your P1 certificate

As you progress we will allow you more and more freedom in making your own decisions in the air. On the last day we will reduce radio instructions and only interfere if we feel you may need our help. Enjoy the beauty of free flight.

# WEATHER

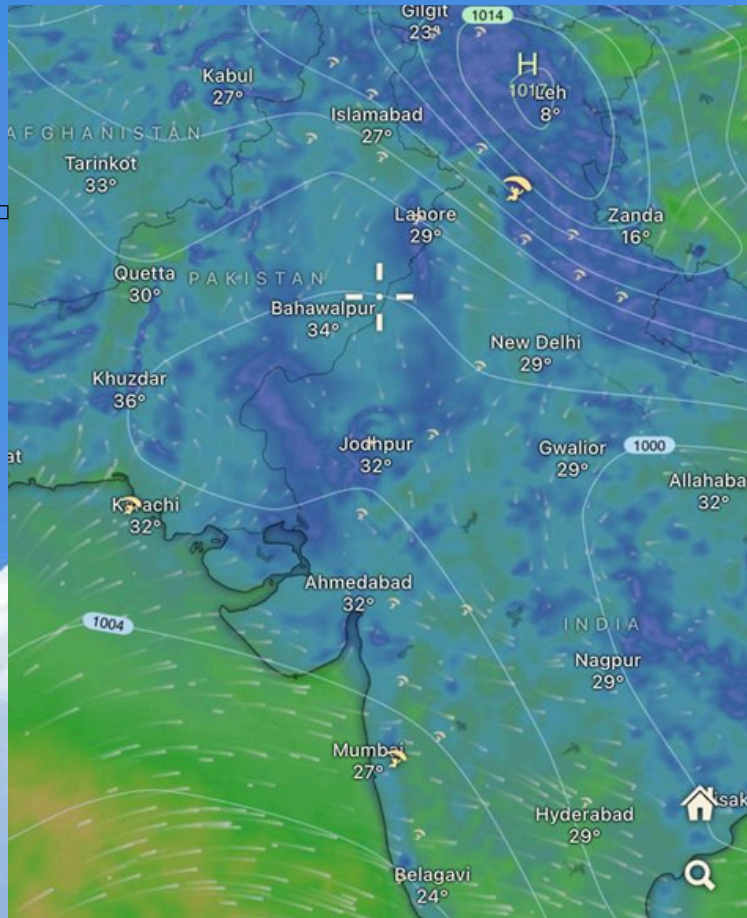

Many paragliding pilots like to think of themselves as mini weather experts. The better we can predict the weather the more we can fly. Come learn about weather with us.

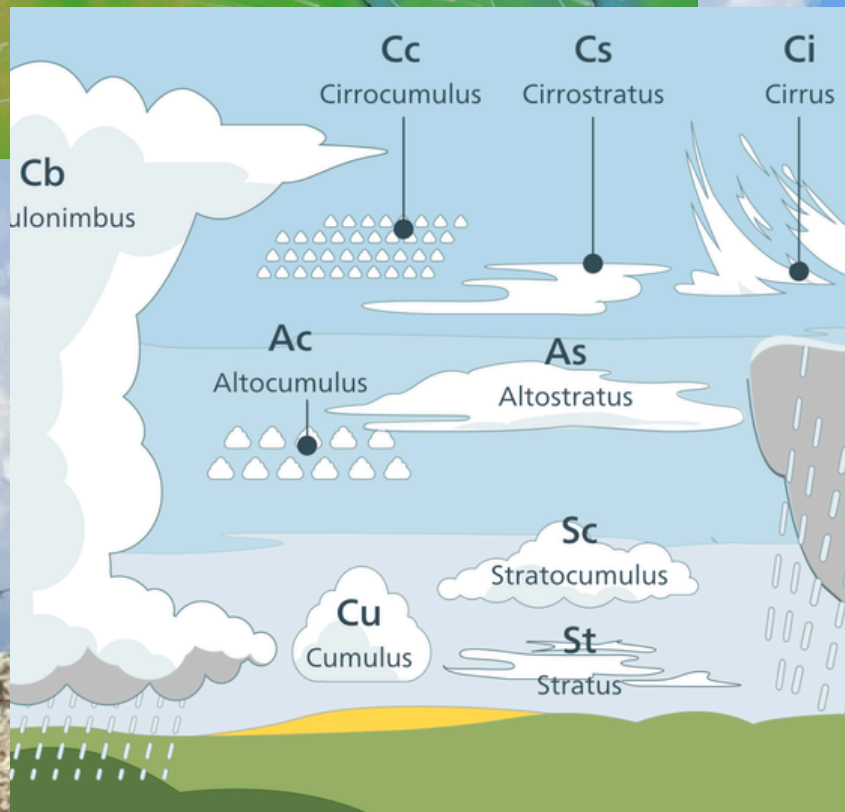

# Weather



## TABLE OF CONTENTS

### Macro

---

- Layers in the atmosphere and atmospheric content - 26
- Air density, pressure, temperature and humidity- 28
- Fronts - 32
- Pressure systems - 33
- Coriolis effect - 34

### Micro


---

- Wind direction, speed and strength - 35
- Terrain and winds - 36
- Wind gradient - 38
- Lapse rate, Skew-t, Cloud base - 39
- Wind cycles and wake turbulence - 42
- Wind sheers - 43
- Coastal winds - 44
- Anabatic and catabatic winds - 45
- Thermal formation - 46
- Types of clouds - 50
- Foehn - 55
- Stable and unstable days - 56




# ATMOSPHERIC LAYERS

- Ozone layer- this layer is concentrated from about 66,000 ft and 131,000 ft. This layer is responsible for stopping UV rays to reach the earth's surface.
- Troposphere- is the lowest layer in the earth's atmosphere and is where all weather on earth takes place.
- Stratosphere- the bottom of this sphere is a heavy inversion which prevents any moisture from passing over it.

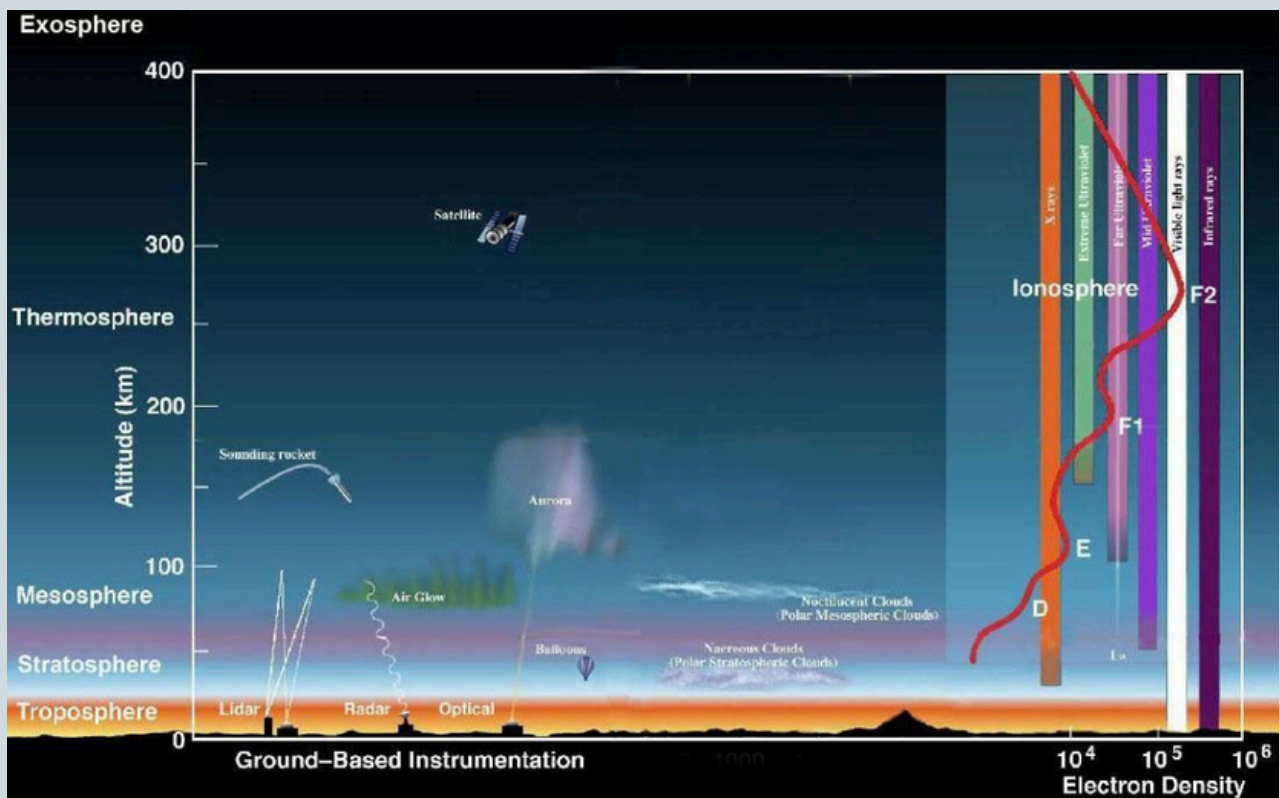


For paragliding pilots we do not want to go beyond 5000m ASL since the oxygen in the atmosphere drops drastically causing hypoxia.

# COMPONENTS OF THE ATMOSPHERE

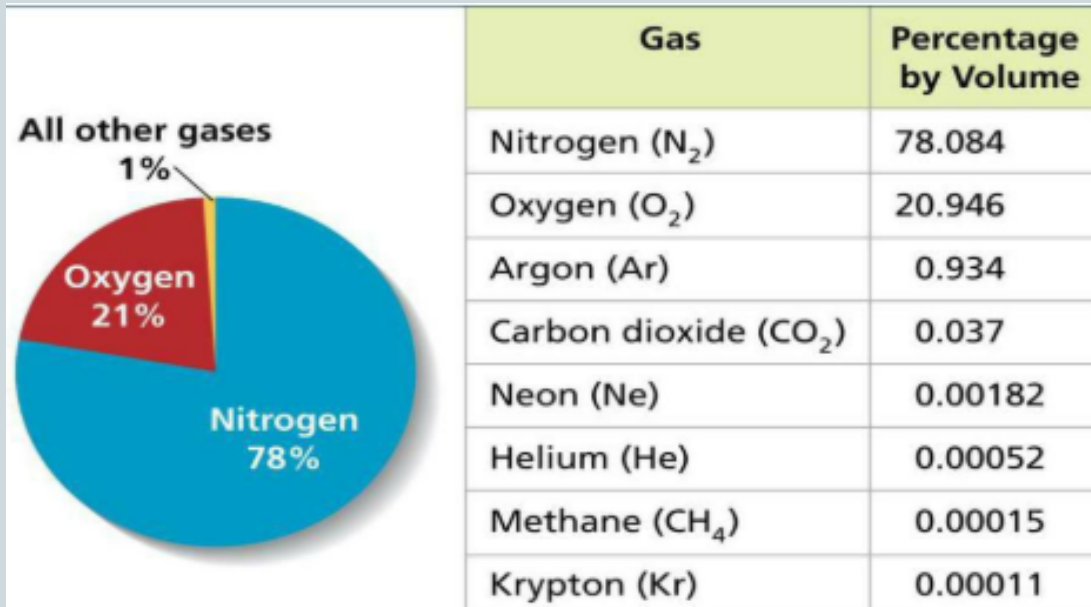

The earth's atmosphere consists of 78% nitrogen, 21% oxygen, and 1% CO<sub>2</sub> and other gases. However, as pilots, we are more concerned with the amount of water in the atmosphere since it plays a more significant role in weather.

The water cycle drives weather and directly impacts paragliding. Evaporation adds moisture and fuels thermals, while condensation forms clouds that mark lift or, if excessive, signal storms. Precipitation ends safe flying by bringing rain, downdrafts, and low visibility. Wet ground reduces thermal strength, while transpiration from vegetation influences local microclimates. For pilots, understanding the water cycle helps read the sky, judge thermal quality, anticipate cloud development, and recognize risks like overdevelopment or rain.

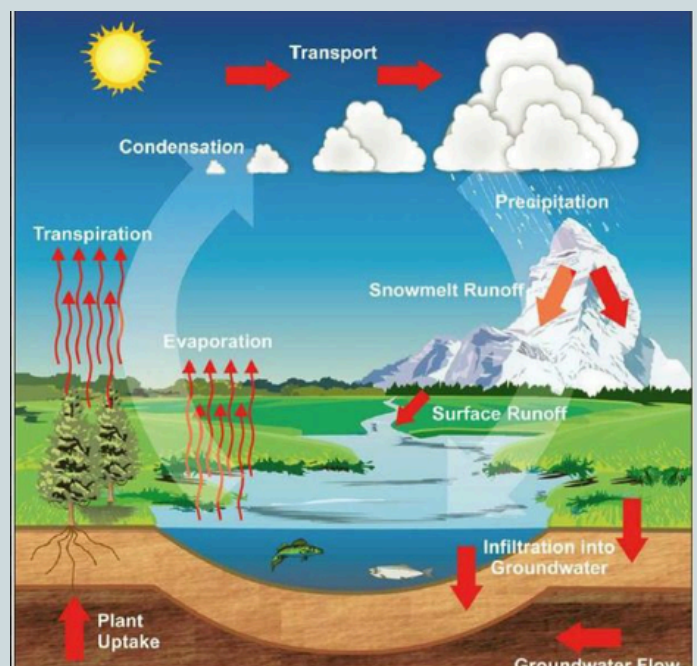

# AIR DENSITY

Air density is the number of air molecules per cubic meter.

Air density varies depending on atmospheric pressure and temperature of the region.



## AIR DENSITY AND TEMPERATURE FOR PARAGLIDING PILOTS

### 1. What is Air Density?

- Air density is how tightly packed air molecules are in a given space.
- Dense air = more lift, because your wing has more molecules to “push against.”
- Thin air = less lift, requiring higher speeds.

### 2. Effect of Temperature

- Warm air is less dense (molecules spread out).
- Cold air is more dense (molecules packed closer).
- For pilots:
  - Hot days → thinner air → weaker lift at launch, longer takeoff runs, lower wing performance.
  - Cooler mornings/evenings → denser air → wings feel more responsive, better glide.

### 3. Altitude Connection

- As you go higher, pressure and density drop, regardless of temperature.
- This means thermals weaken with height, and wing performance changes (higher stall speed, less glide).


### 4. Why it Matters

- Performance: Wings feel sluggish in hot, thin air and sharp in cool, dense air.
- Safety: At high altitudes or on hot days, launches and landings need more awareness of reduced lift.
- Weather Reading: Density variations contribute to thermal strength, cloud base height, and overall flying conditions.

# AIR PRESSURE

Standard Atmospheric Pressure by Altitude (approx.)

- Sea level (0 ft / 0 m): 1013.2 hPa (29.92 inHg)
- 1,000 ft (300 m): ~ 977 hPa
- 5,000 ft (1,500 m): ~ 850 hPa
- 10,000 ft (3,000 m): ~ 700 hPa
- 18,000 ft (5,500 m): ~ 500 hPa (half of sea level pressure)
- 30,000 ft (9,000 m): ~ 300 hPa
- 40,000 ft (12,000 m): ~ 200 hPa

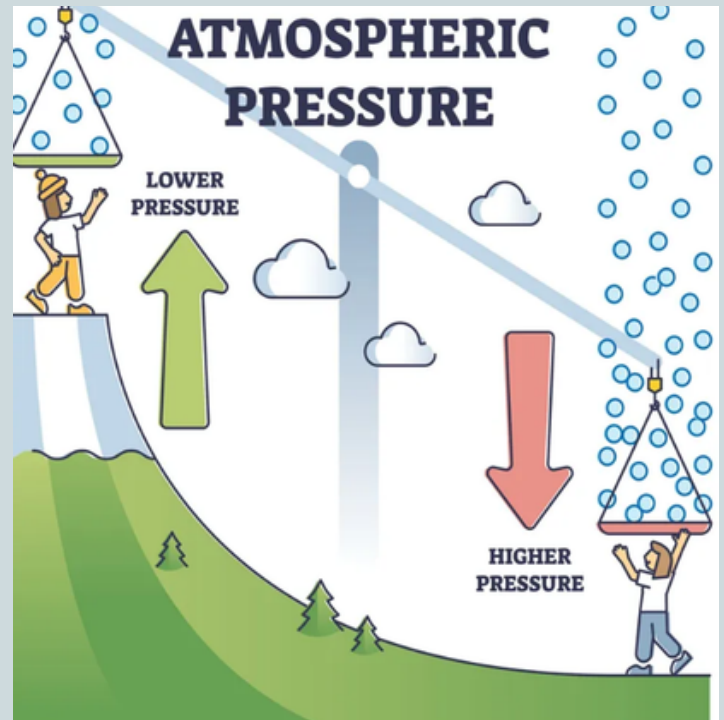


## ISOBARS

- Definition: Isobars are lines on a weather map that connect points of equal atmospheric pressure.
- What They Show:
  1. Pressure Patterns → Highs (H) and Lows (L).
  2. Wind Strength → The closer the isobars, the steeper the pressure gradient, which means stronger winds. Widely spaced isobars = lighter winds.
  3. Wind Direction → Winds flow parallel to isobars (due to Coriolis effect) and slightly across them toward low pressure.
  4. Weather Systems →
    - High pressure (anticyclones) = stable, clearer weather.
    - Low pressure (cyclones) = unstable, cloudier, and possibly stormy weather.

# Effects of altitude on the body

Pilots can fly for 30 mins from 10,000ft to 13,000ft. Any height or time beyond that oxygen and weather protection is required.

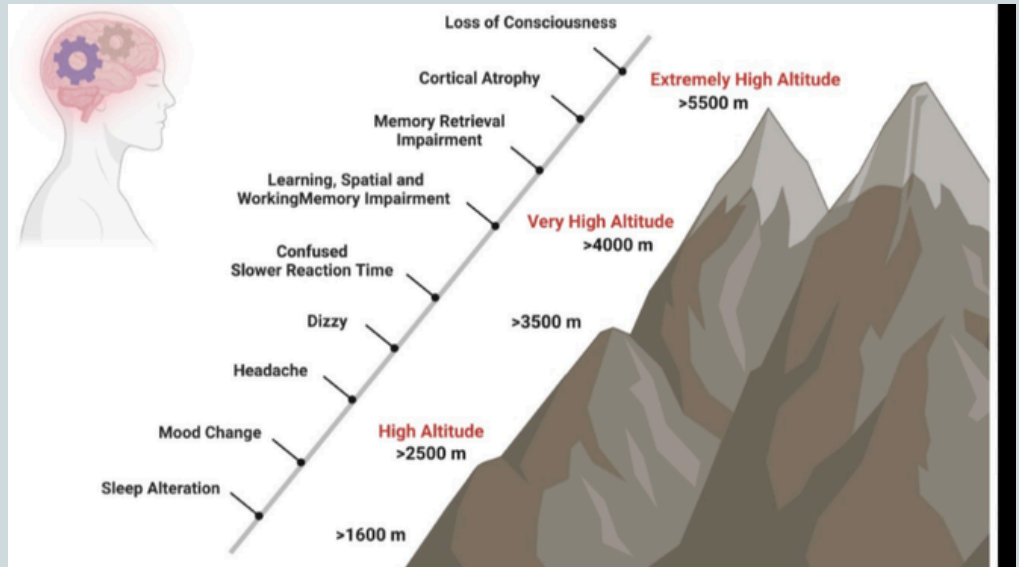


## Hypoxia

- Hypoxia = insufficient oxygen supply to the body (especially the brain)
- Occurs mainly at higher altitudes due to reduced oxygen availability
- Types:
  1. Hypoxic hypoxia – low oxygen in the air (most common in flying)
  2. Hypemic hypoxia – blood can't carry oxygen (e.g., anemia, CO poisoning)
  3. Stagnant hypoxia – poor blood circulation
  4. Histotoxic hypoxia – cells can't use oxygen (e.g., alcohol, drugs)
- Early symptoms:
  1. Headache
  2. Dizziness
  3. Euphoria
  4. Poor judgment
  5. Tunnel vision
- Late symptoms:
  1. Confusion
  2. Loss of coordination
  3. Unconsciousness
- Danger: Symptoms are subtle and often unnoticed by the person affected
- Prevention:
  1. Avoid alcohol before flying
  2. Stay hydrated and rested
  3. Use supplemental oxygen when required
  4. Descend immediately if symptoms appear
- Key rule:
  1. 🚩 If in doubt, descend

## Hyperthermia

- Hypothermia = dangerously low body temperature. Occurs when the body loses heat faster than it can produce. It can happen even in cool, windy, or wet conditions
- Causes:
  1. Cold air at altitude
  2. Wind chill
  3. Wet clothing / rain
  4. Long flight duration
  5. Inadequate insulation
- Early symptoms:
  1. Shivering
  2. Cold, numb hands and feet
  3. Slurred speech
  4. Poor coordination
- Moderate to severe symptoms:
  1. Violent or stopped shivering
  2. Confusion
  3. Drowsiness
  4. Loss of consciousness
- Dangers:
  1. Impaired judgment and reactions
  2. Loss of motor control
  3. Can be fatal if untreated
- Prevention:
  1. Layered, windproof clothing
  2. Keep dry
  3. Eat well before flying
  4. Shorten flights in cold conditions
  5. Protect hands, feet, and face
- Immediate action:
  1. 🚩 Stop exposure, shelter from wind
  2. 🚩 Remove wet clothing, insulate and rewarm gradually
  3. 🚩 Seek medical help for severe cases

# TEMPERATURE CHANGES IN THE ATMOSPHERE

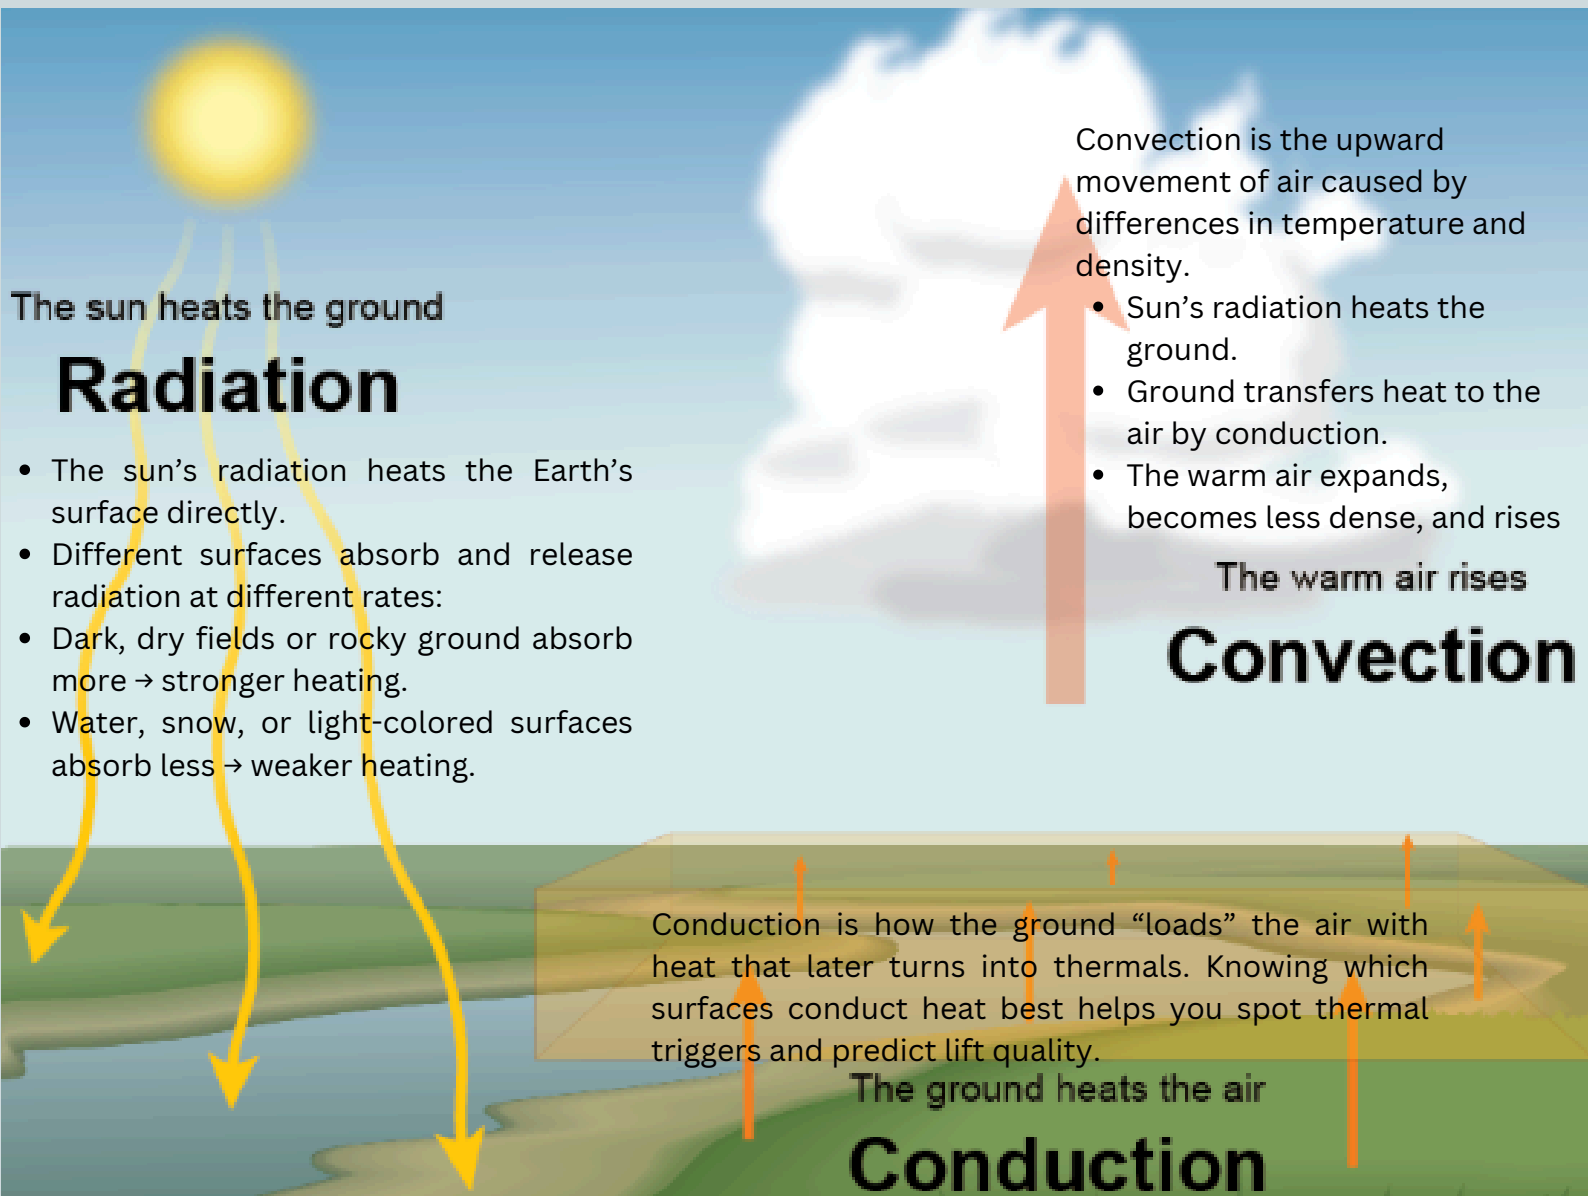

The sun heats the ground

## Radiation

- The sun's radiation heats the Earth's surface directly.
- Different surfaces absorb and release radiation at different rates:
- Dark, dry fields or rocky ground absorb more → stronger heating.
- Water, snow, or light-colored surfaces absorb less → weaker heating.

Convection is the upward movement of air caused by differences in temperature and density.

- Sun's radiation heats the ground.
- Ground transfers heat to the air by conduction.
- The warm air expands, becomes less dense, and rises

The warm air rises

## Convection


Conduction is how the ground "loads" the air with heat that later turns into thermals. Knowing which surfaces conduct heat best helps you spot thermal triggers and predict lift quality.

The ground heats the air

## Conduction


## Advection

Advection is the wind-driven transport of air masses. It is the horizontal movement of air in the atmosphere. It shapes the background conditions you fly in – influencing thermal strength, stability, and local wind systems like sea breezes or valley winds.

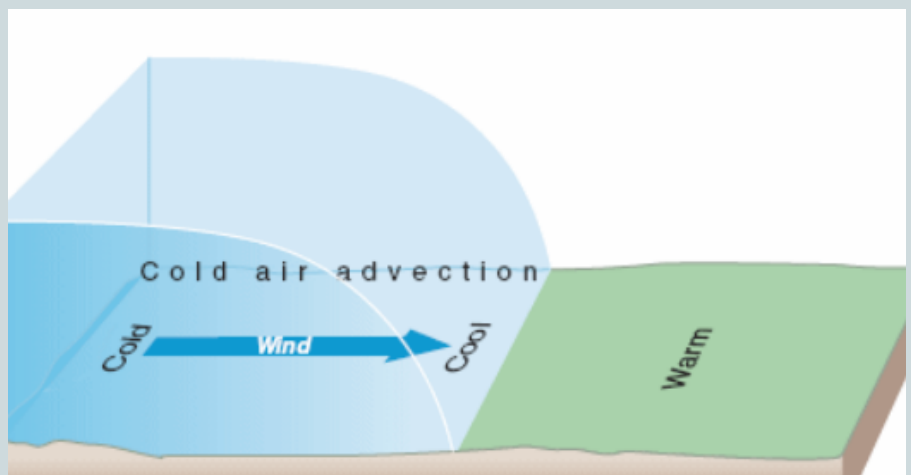

# HUMIDITY

## Humidity and altitude

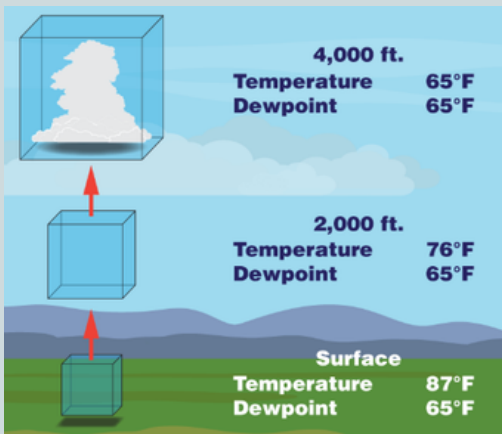

### Dew point

The dew point is the temperature to which air must be cooled for it to become saturated (100% relative humidity).

The dew point tells you when and where clouds will form. A small temperature-dew point gap = low bases and moist conditions; a larger gap = higher bases and drier, stronger thermals.

## water cycle

### 1. Humidity Basics


- Humidity = the amount of water vapor in the air.
- Warm air can hold more moisture; cold air holds less.
- High humidity makes air less dense because water vapor is lighter than nitrogen and oxygen.


### 2. Effect of Altitude

- As altitude increases, air pressure and temperature drop, so the air's capacity to hold moisture decreases.
- This is why clouds form at higher altitudes: rising air cools, humidity reaches 100% (saturation), and condensation occurs.


### 3. For Pilots

- High humidity at low altitudes → denser cloud formation, lower cloud base, and reduced visibility.
- Dry air at altitude → higher cloud bases and stronger thermals (less energy lost to moisture).
- Performance factor: High humidity + altitude = thinner air, reducing wing efficiency and climb performance.
- Safety: Watch for sudden condensation → can mean cloud suck or overdevelopment.

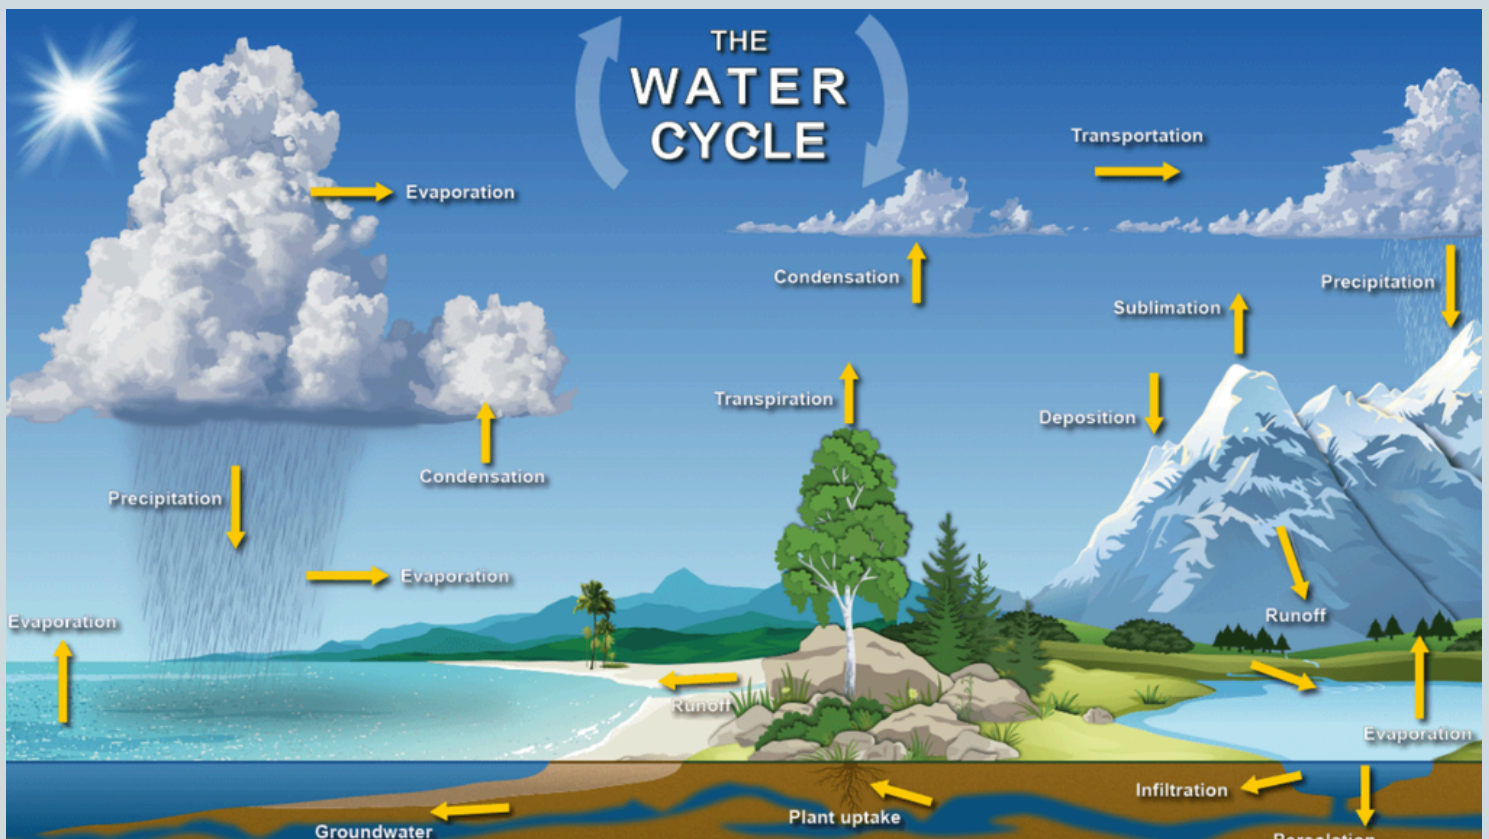


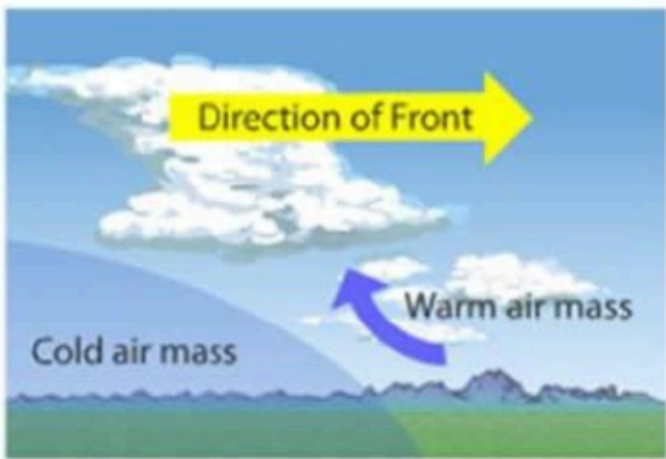


Cold front

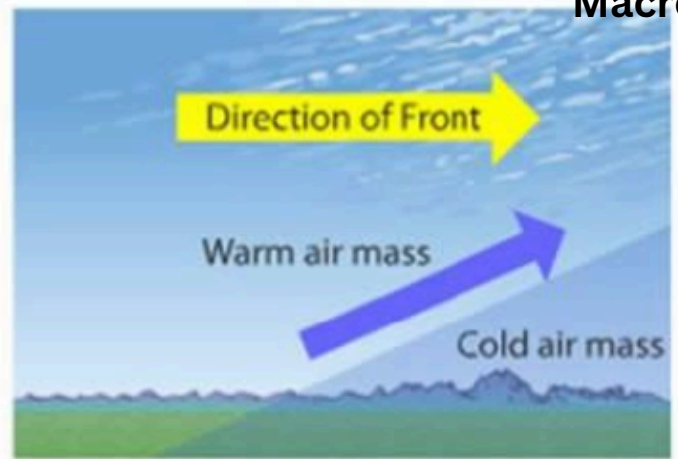

Warm front

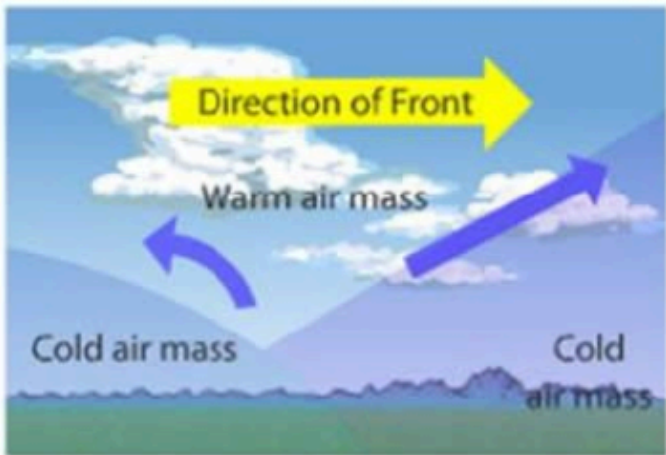

Occluded front

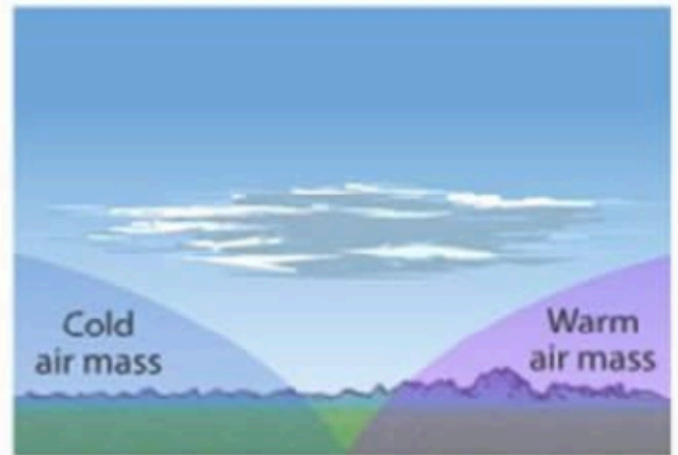

Stationary front

# FRONTS

## 1. Cold Front

- What it is: A boundary where cold air pushes under warm air, forcing it to rise rapidly.
- Weather: Cumulus/cumulonimbus, showers, thunderstorms, gusty winds, turbulence.
- Pilot impact: Dangerous for flying – strong lift, turbulence, and storm risk.

## 2. Warm Front

- What it is: Warm air slides over cooler air gradually.
- Weather: Layered clouds (stratus, altostratus, cirrostratus), steady rain, reduced visibility.
- Pilot impact: Weak or no thermals, overcast skies, smooth but unflyable due to rain/poor visibility.

## 3. Stationary Front

- What it is: When a warm and cold air mass meet but neither advances.
- Weather: Cloudy, damp, light winds, long periods of poor conditions.
- Pilot impact: Generally unsuitable – no thermals, possible drizzle, low visibility.

## 4. Occluded Front

- What it is: When a cold front catches up with a warm front, lifting warm air completely off the ground.
- Weather: Complex clouds, widespread rain, sometimes thunderstorms.
- Pilot impact: Very unstable, poor visibility, strong winds – unsafe for paragliding.


### Pilot's takeaway:

- Cold front → turbulent, stormy.
- Warm front → cloudy, wet, little lift.
- Stationary front → damp, stable.
- Occluded front → chaotic weather.

# PRESSURE


## High Pressure (Anticyclone)

- Air movement: Air sinks (subsidence) and spreads outward.
- Rotation (Northern Hemisphere): Clockwise;
- (Southern Hemisphere): Counterclockwise.
- Weather:
  - Clear skies, light winds, stable air.
  - Morning inversions common → smooth but weak thermals until sun breaks them.
- Pilot impact:
  - Gentle flying, great for beginners.
  - Weak thermals early, stronger in the afternoon once inversion breaks.
  - Risk of blue thermals (no cumulus markers).

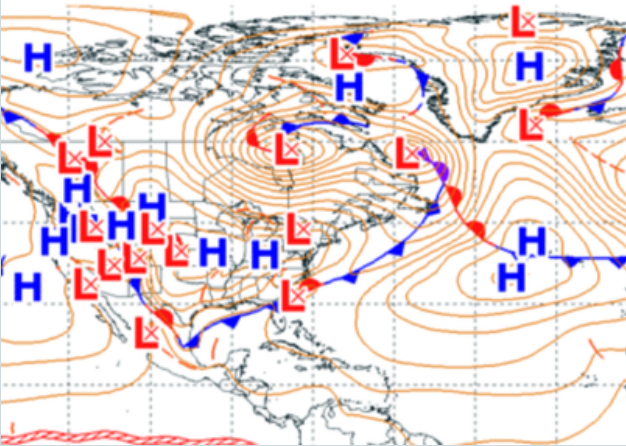


## Low Pressure (Cyclone / Depression)

- Air movement: Air rises, converging at the surface.
- Rotation (Northern Hemisphere): Counterclockwise; (Southern Hemisphere): Clockwise.
- Weather:
  - Cloudy, unstable air, stronger winds.
  - Showers, thunderstorms possible.
- Pilot impact:
  - Stronger thermals and cumulus clouds, but risk of overdevelopment and storms.
  - More turbulence, gusty winds → advanced conditions only.

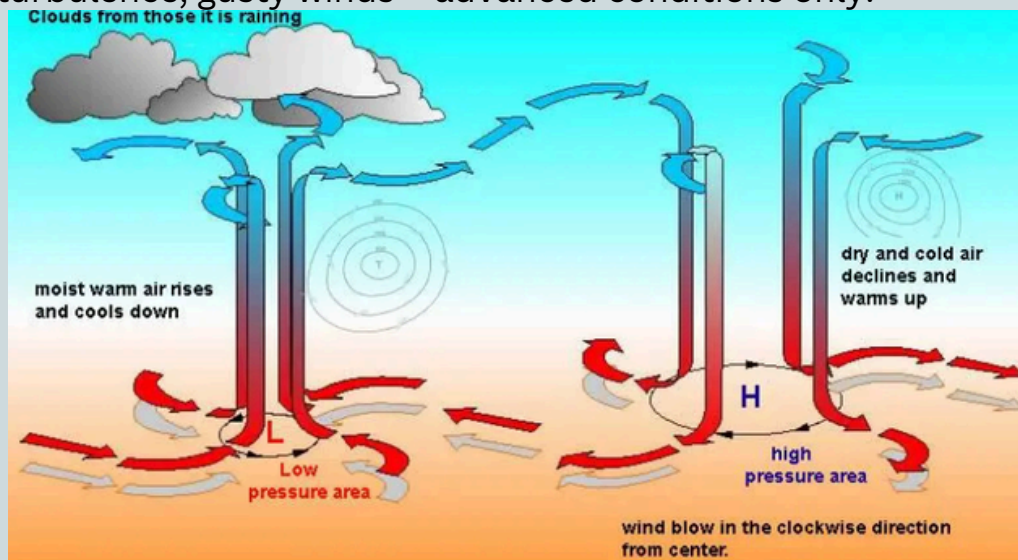

# CORIOLIS EFFECT

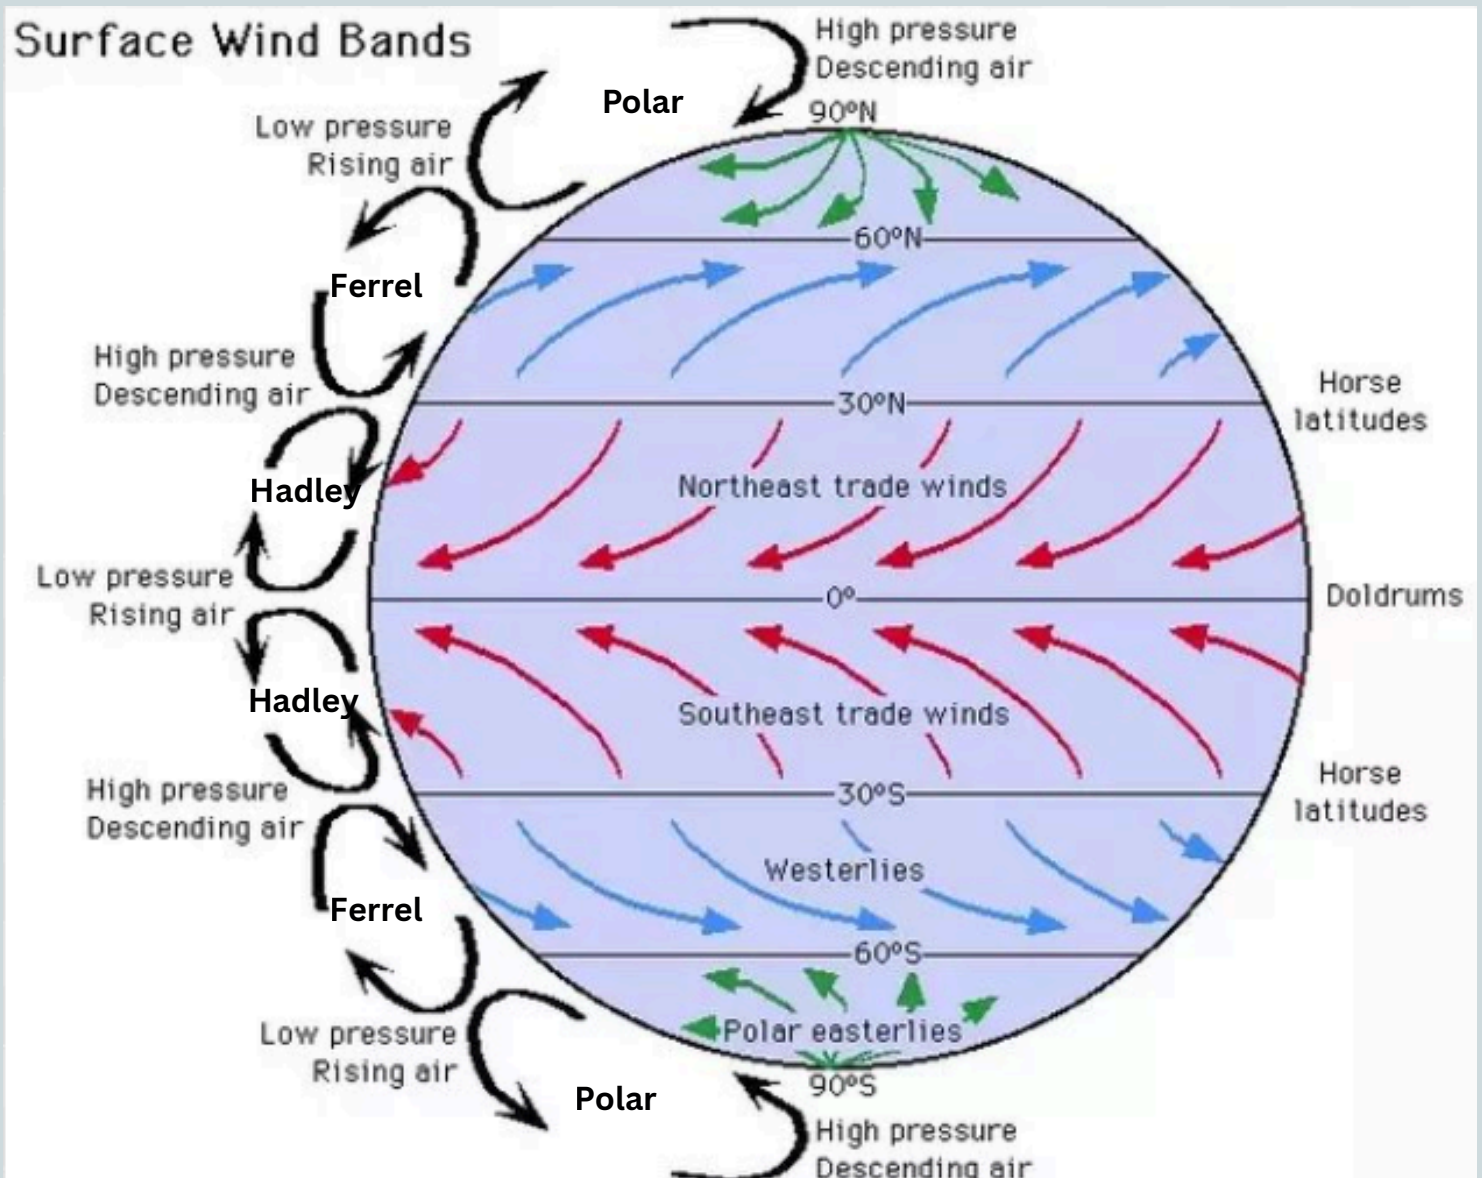

## Coriolis effect

The Coriolis effect is the apparent deflection of moving air (or any object) caused by the Earth's rotation.

How it works:

- Earth spins faster at the equator than at the poles.
- As air moves north or south, it appears to “curve” because the ground beneath it is rotating at a different speed.
- The Coriolis effect bends large-scale winds: right in the north, left in the south. It's why highs and lows spin the way they do, and why winds don't just blow straight from high to low pressure.

# Wind effects on first flights

## Wind Strength and Direction



In order to have a safe first flight we look at wind strength/speeds of 5 to 10 km/h, with a wind direction that is hitting the ridge at a maximum of 15° angle.

This is done for 2 reasons.


1- As wind strength increases the errors made are multiplied. We require a little wind in order to have a easy take off but too much creates an increase in dynamic movements of the glider.

2- As the angle of the wind increase the wind moves more across the ridge then up the ridge making take off more and more challenging. An ideal wind angle is 90° to the ridge, moving away from the 90° starts making take off more challenging where the glider acts more dynamic.

## Windward and Leeward sides

The side of the ridge the wind is blowing from is the windward side and the lee side is the opposite. The windward side is know to have smooth upward flowing winds, while the lee side has disrupted winds and have the feeling of being thrown around in a washing machine. Paragliders avoid the lee sides as far as possible since the gliders become very difficult to control. However flying the windward side of ridges is usually accompanied with smooth air and gradual lift, stay on the windward side for the entire duration of your flying career.



The image shows us a representation of what rotors from a hill can look like.

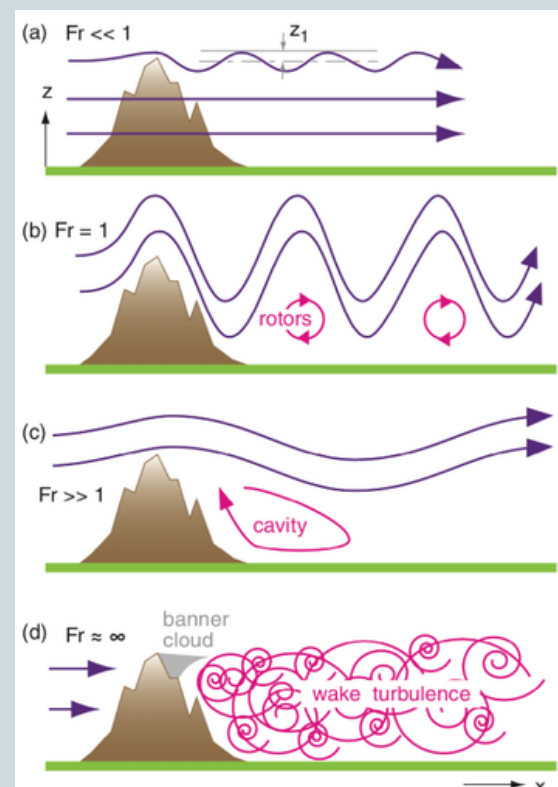

# TERRAIN EFFECTS ON WIND

## Venturis

When air flows through a narrow gap or constriction, it speeds up. It is usually found between mountain passes, ridges, or gaps, wind accelerates. Pilots require to understand that in areas of venturis the wind speeds can multiply from the base wind to a great extent, getting caught in these areas will expose a pilot to be pushed back and not be able to move forward, pilots often end up in the lee side of the terrain or in other forms of turbulent areas when they get stuck in venturis.

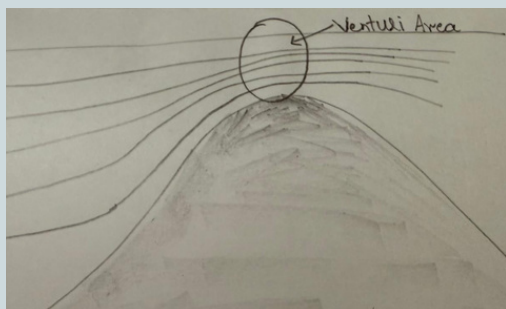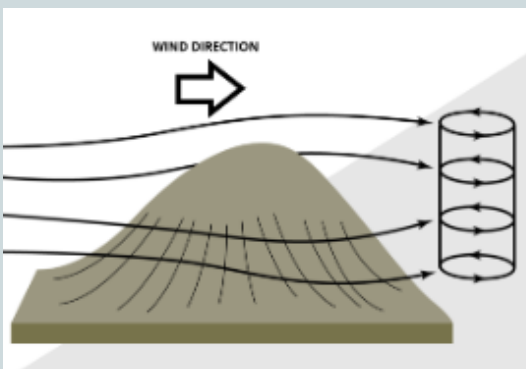


## Compression

Imagine pressing a pipe through which water is flowing out the mouth. Watch the increased speed of the water.

Air compresses in a similar manner, instead of your thumb it is the ridge or an obstacle in its path that causes the compression. This causes the air around an object to speed up. Paragliders must stay away from compression in order to not get stuck at a spot and then get blown back into the lee side of a ridge.

Air acts similar to water, if you watch a rock in middle of a river, the air will act the same way around a ridge.

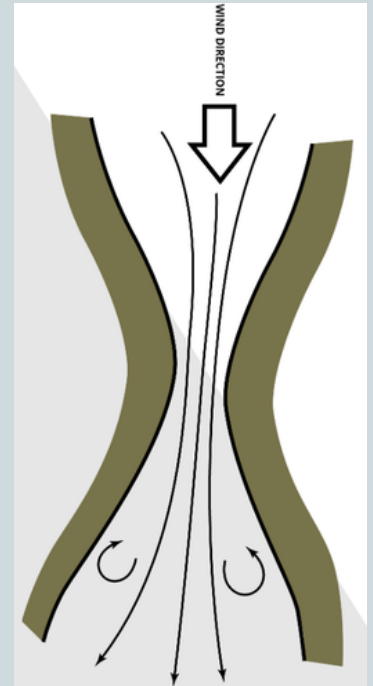


## Compression and Venturis

When wind hits an obstacle (like a ridge or hill), it is forced to “compress” before flowing up and over. A similar thing happens on the sides to the ridge.

On the windward side of a hill/cliff, air compresses, causing higher pressure and a smooth upward flow.


On reaching the top, the wind is further compressed by the atmosphere and speeds up even more, causing a venturi on top of the mountain. This is usually found on top of hills right after take off, it only extends a few meters off the ground and once a pilot gains height they are usually clear of this type of venturi/compression region.

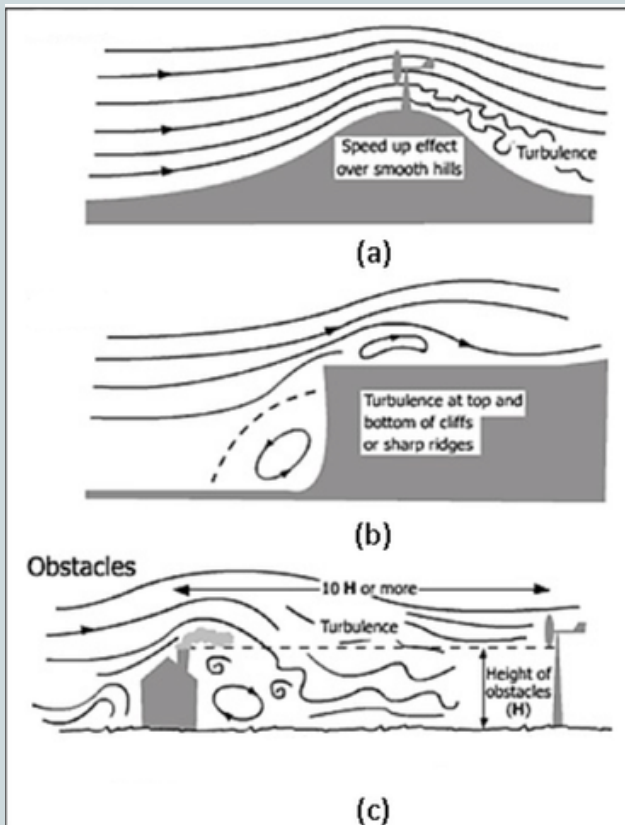

## WIND OVER A HILL

wind over a hill is depicted by the image (a) in the drawing to the left. notice that there is turbulence only on the lee side of the ridge. You will find smooth and steady lift on the windward side.

When taking off pilots will likely experience a smooth inflation. On deciding to take off they will fly straight into the lift band and gain height if the wind strength supports it.

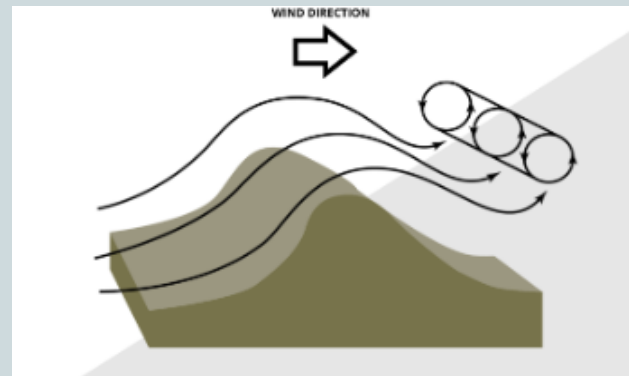


## WIND OVER A CLIFF

Look at the second drawing (b), see how there is disruption in the wind at the base of the cliff and right on top, the disruption on top is the most likely take off zone, even if you inflated the glider at the back you will still require to kite the glider through this disrupted wind area to reach the lift band. This makes taking off on cliffs more challenging than hills, however with practice on reverse kiting it is quite possible. The second thing to remember is that on a cliff launch we do not commit, we will simply walk to the edge slowly and allow the wind to pick us up, if we feel like the wind will not pick us up we will delay the launch until the winds are strong enough. If you run off the cliff it is likely that you will sink instead of getting picked up.

In order to have a fun safe cliff launch, place your glider a good distance away from the cliff, inflate the glider and slowly move towards the cliff edge, about 5mts away from the edge stop and wait, if the glider is pulling you up at the point give a small run, it will most likely lift you into the lift band. If you do not feel any lift, do not run, just wait and hope for a better cycle. If you are not getting lifted up even after waiting for a bit, it may be time to deflate the glider and wait for better winds.

Remember, never go up to fly if you are not willing to walk down when the weather does not facilitate a safe flight.

# Wind gradient

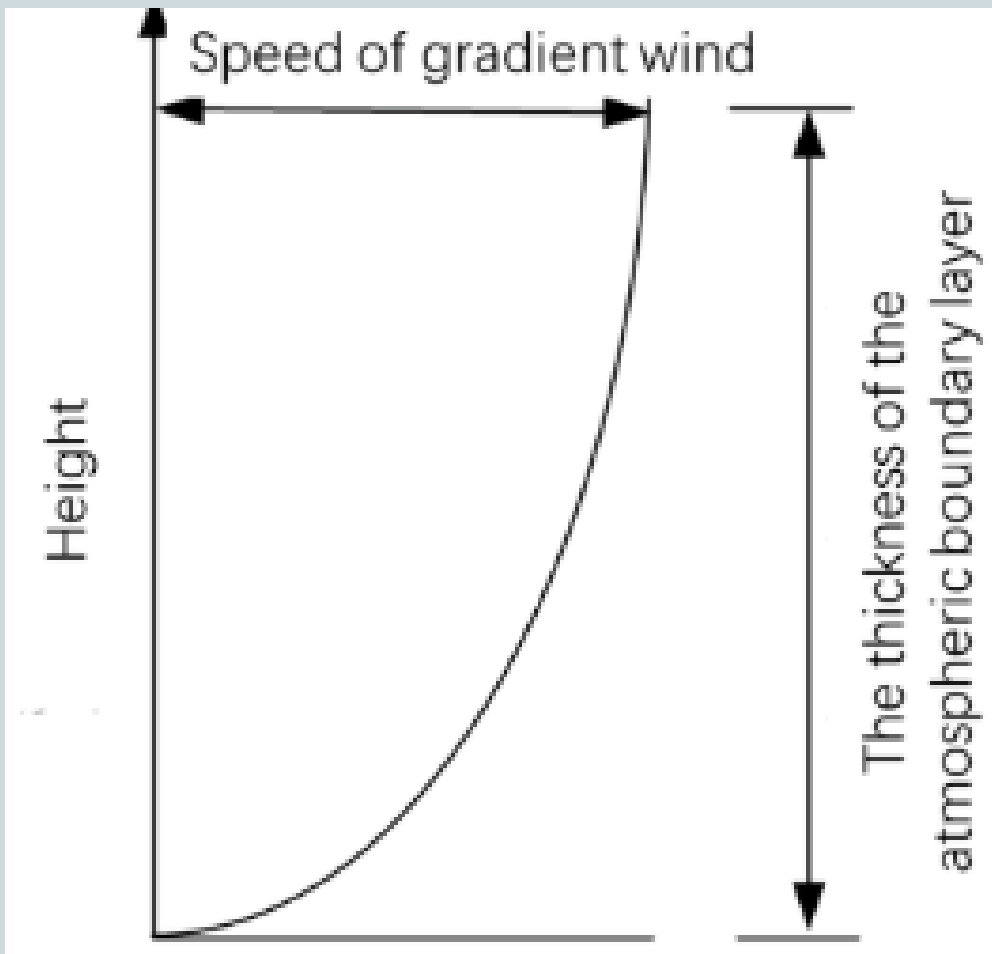

This is the rate at which the speed of the wind changes with change in altitude.

## Landing

- Just above the surface, wind may be much lighter, which can surprise you while performing the flare.
- Critical to judge when choosing landing spots.

## Safety Risks

- On landing, ground-level wind is weaker than at altitude, you may approach faster than expected and will need good flare timing.
- In severe cases, the glider can dive sharply or stall.

# LAPSE RATES

Lapse rate is the rate at which air temperature changes with altitude.

Standard Atmosphere (ISA)

- On a “normal” day:  $\sim 6.5$  °C per 1,000 m (or  $\sim 2$  °C per 1,000 ft) of climb.
- Example: If it's 25 °C at sea level  $\rightarrow$  at 2,000 m, the standard temperature is  $\sim 12$  °C.

Types of Lapse Rates (important for pilots)

## 1. Environmental Lapse Rate (ELR)

- The actual temperature decrease with height on a given day.
- Measured by weather balloons or forecasts.

## 2. Dry Adiabatic Lapse Rate (DALR)


- Unsaturated air cools at  $\sim 3$  °C per 1,000 ft (10 °C per 1,000 m) as it rises.

## 3. Moist Adiabatic Lapse Rate (MALR)

- Saturated (cloudy) air cools more slowly, at  $\sim 1.5$  °C per 1,000 ft (6 °C per 1,000 m), because condensation releases heat.

Why It Matters for Pilots

- Stable air: Temperature drops slower than DALR  $\rightarrow$  air resists rising  $\rightarrow$  weak/no thermals.
- Unstable air: Temperature drops faster than DALR  $\rightarrow$  rising air stays warmer than surroundings  $\rightarrow$  strong thermals.
- Inversions: A layer where temperature increases with height  $\rightarrow$  acts as a lid, blocking thermals and trapping haze.

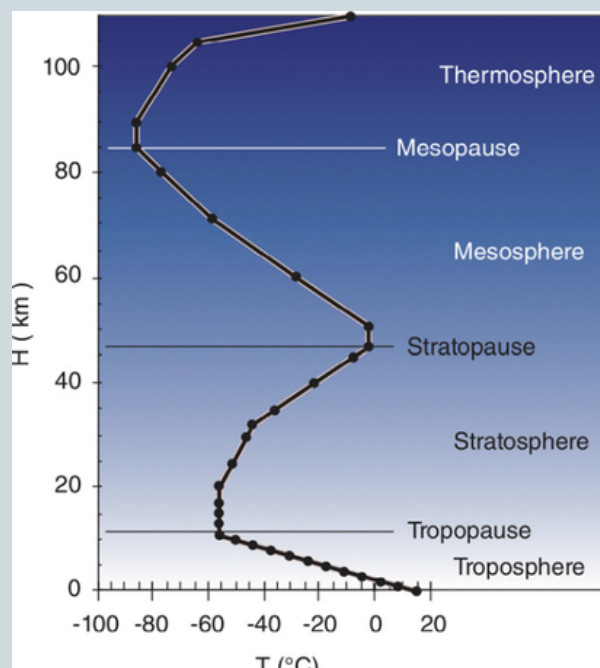

# SKEW-T

## 1. What you see on Windy app Skew-T

When you tap on a location → "Sounding", you'll see:

- Red line → air temperature with height.
- Blue/green line → dew point with height.
- Wind barbs on the right → wind direction and strength at levels.
- Grey shading → where clouds are predicted (temp ≈ dew point).

## 2. How to Read It

### (a) Thermal Trigger & Instability

- At ground level: check the gap between red (temp) and blue (dew point).
- Small gap → little heating needed → thermals can start earlier.
- Large gap → need strong heating → late or weak thermals.
- If the red line tilts sharply left (temp falls fast with height) → atmosphere is unstable → strong thermals.
- If the red line tilts right (temp increases with height, an inversion) → stable layer → thermals capped.

### (b) Cloud Base

- Find the altitude where red and blue lines get close → that's the predicted cumulus base.
- Below that, air is unsaturated (blue line separate).
- At/above that, clouds can form.

### (c) Inversions

- If the red line bends to the right at some altitude → temperature rises with height → inversion.
- Inversions stop thermals from rising past that level.
- Example: an inversion at 2000 m = your thermals might top out around there.

### (d) Winds


- Look at the wind barbs:
- Each "feather" = 10 knots (≈18 km/h).
- Half feather = 5 knots.
- Triangle = 50 knots.
- Changes with height show wind gradient and shear.
- Strong shear → turbulence, harder XC flying.
- Consistent direction with height → smooth drift of thermals, good XC conditions.

### (e) Cloud & Overdevelopment Risk

- If temp and dew point stay close for a big vertical depth → thick clouds → risk of overdevelopment / big cu / storms.
- If they touch only at a narrow layer → small cumulus.

## 3. Quick Pilot Checklist Using Windy Skew-T

- Ground gap (temp vs dew point) → When will thermals start?
- Cloud base (where lines meet) → How high can I climb?
- Inversions → Is my climb capped early?
- Wind barbs → Is wind smooth or sheared?
- Cloud depth → Just cumulus or risk of overdevelopment?

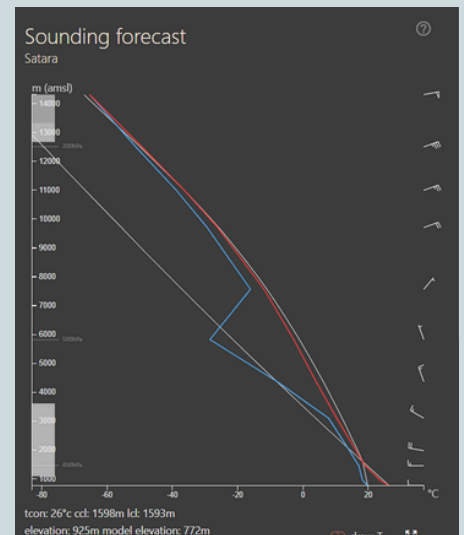



# CLOUD BASE

## 1. Start with Thermals

- The sun heats the ground → ground heats the air just above it.
- This warm air parcel becomes lighter (less dense) than surrounding air → it starts to rise.
- As it rises, pressure decreases with altitude → the parcel expands and cools.
- Dry Adiabatic Lapse Rate (DALR) =  $\sim 9.8$  °C per 1000 m.

## 2. Cooling and Dew Point

- The rising parcel always contains some water vapor.
- The dew point is the temperature at which the air parcel becomes saturated (relative humidity = 100%).
- As the parcel cools toward this dew point, the gap between temperature (T) and dew point (Td) shrinks.

## 3. Lifting Condensation Level (LCL) = Cloud Base

- The altitude where the parcel's temperature = dew point is called the LCL.
- At the LCL, the air parcel reaches saturation → condensation starts → tiny water droplets form → cumulus cloud base.
- Quick rule of thumb for pilots
- Cloud base height (in meters)  $\approx 125 \times (T - T_d)$
- where T = surface temperature (°C), Td = dew point (°C).

### Example:

- Ground temp = 30 °C
- Dew point = 20 °C
- Difference = 10 °C
- Cloud base  $\approx 125 \times 10 = 1250$  m AGL

## 4. After Cloud Base

- Above the LCL, the parcel cools more slowly because latent heat is released during condensation.
- Moist Adiabatic Lapse Rate (MALR) =  $\sim 5-6$  °C per 1000 m.
- This means thermals can continue climbing inside the cloud, sometimes far above the visible base.

## 5. Factors Affecting Cloud Base

- Humidity:
  - High humidity = dew point closer to temp = lower cloud base.
  - Dry air = bigger gap = higher cloud base.
- Surface heating: Stronger heating lifts air higher = easier to reach LCL.
- Mixing: Wind or turbulence can mix dry air downward, lifting the cloud base.
- Inversions: If an inversion is below the calculated LCL, clouds may not form at all.


## 6. For Paragliding Pilots

- Low base (500–1000 m AGL) → fun soaring but limited XC.
- High base (2000–4000 m AGL) → excellent XC potential.
- Very low base may mean humidity is high → risk of OD (overdevelopment, rain).
- Cloud depth (base to top):
- Shallow = small cumulus, safe.
- Deep = big build-ups, possible storm risk.

## Wind cycles and when to take off

Try and observe the wind speed at take-off. It is likely that you will find that the wind speed increases and decreases in quite predictable manners. Think of wind as the waves in an ocean, the way the water rises and falls. The wind also follows a similar pattern.

You can find wind speed differences of 5km/h to more than 30km/h depending on the weather conditions, the ideal speed difference from the base wind to the gust is about 5-8km/h. There is also the rate of increase to be considered, the more drastic and quick the change the more likely that you will encounter a punchy day in the sky.

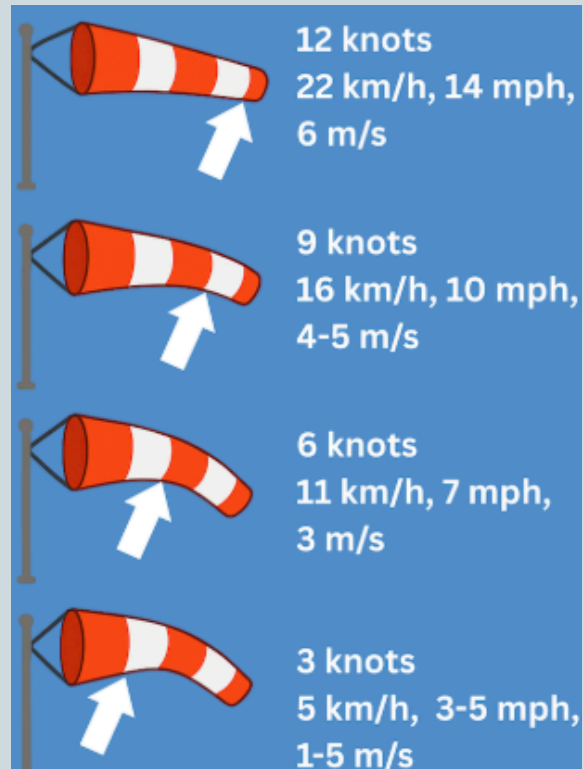

## Wake turbulence


Wake turbulence is the disturbed, rotating air left behind by an aircraft as it generates lift.

Where are you likely to encounter it?


- Strongest when aircraft are heavy, slow, and clean (flaps retracted).
- Extends downward and outward from the wingtips, sinking at ~2-3 m/s.
- It is typical for paragliding pilots to encounter this behind a tandem paragliding glider, hang gliders, sail planes or ultra lights, since those are the aircrafts we are likely to encounter and fly in the same airspace.

### 1. Safe Practice

- Avoid flying in the direct wake path of other gliders or aircraft.
- Give separation in both time and space – at least a few wing spans away.
- At airfields, be extra cautious if towing operations or general aviation aircraft are active.

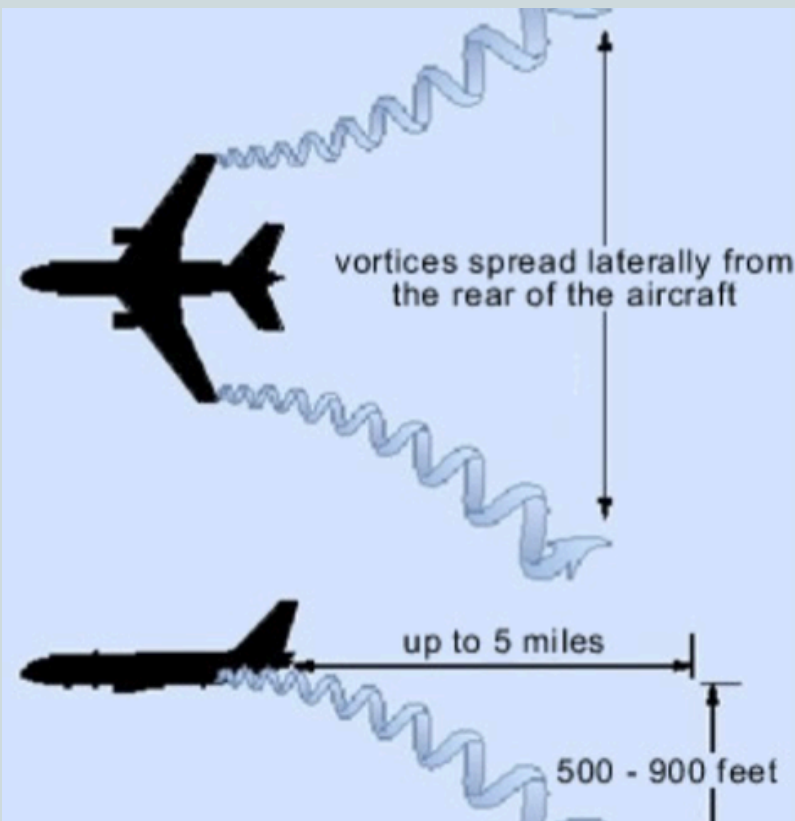

# WIND SHEAR

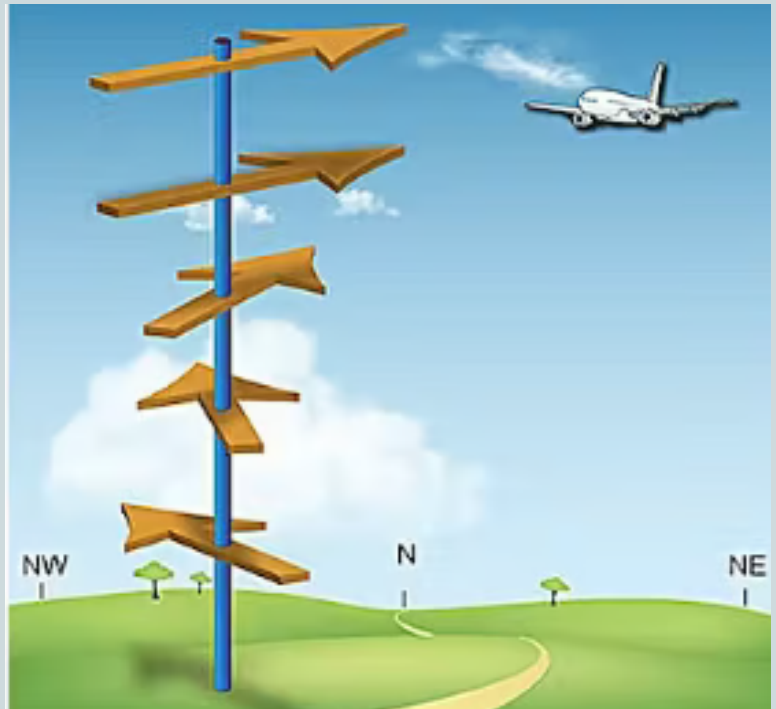

## Wind Shear

- Definition: Wind shear is a sudden change in wind speed or direction over a short distance (vertically or horizontally).
- Difference from Wind Gradient:
  - Wind gradient = gradual change in wind speed with height (normal near the ground).
  - Wind shear = abrupt shift, often unpredictable and more dangerous.

## Causes of Wind Shear


1. Terrain Effects – ridges, cliffs, or obstacles creating turbulence.
2. Temperature Inversions – different air layers sliding past each other.
3. Frontal Systems – sharp boundaries between warm and cold air.
4. Storms / Gust Fronts – strong downdrafts spreading out at the surface.

## For pilots

- In Flight: Crossing layers with different winds (e.g., thermal rising into stronger upper winds) can create violent turbulence.
- Cloud Edges: Strong shear often exists at cumulus edges or near storm anvils → risk of being thrown around.
- Landing: Wind shear near the ground can cause sudden loss of lift or control.

## Dealing with wind shears

- On landing: come to land with as much speed as possible without using the speed bar, this will help preserve your final flare authority and help smooth landings. remember to be ready to run for all landings.
- In flight: if a shear layer catches you during a flight stay calm and simply active pilot your glider, once you are out of the area remember the altitude or area it occurred so you can avoid it.
- Cloud edges: can cause sheers, their sheers are similar to what you experience on the edges of thermals, they are quite manageable and usually considered as part of the sport on days that do not over develop.

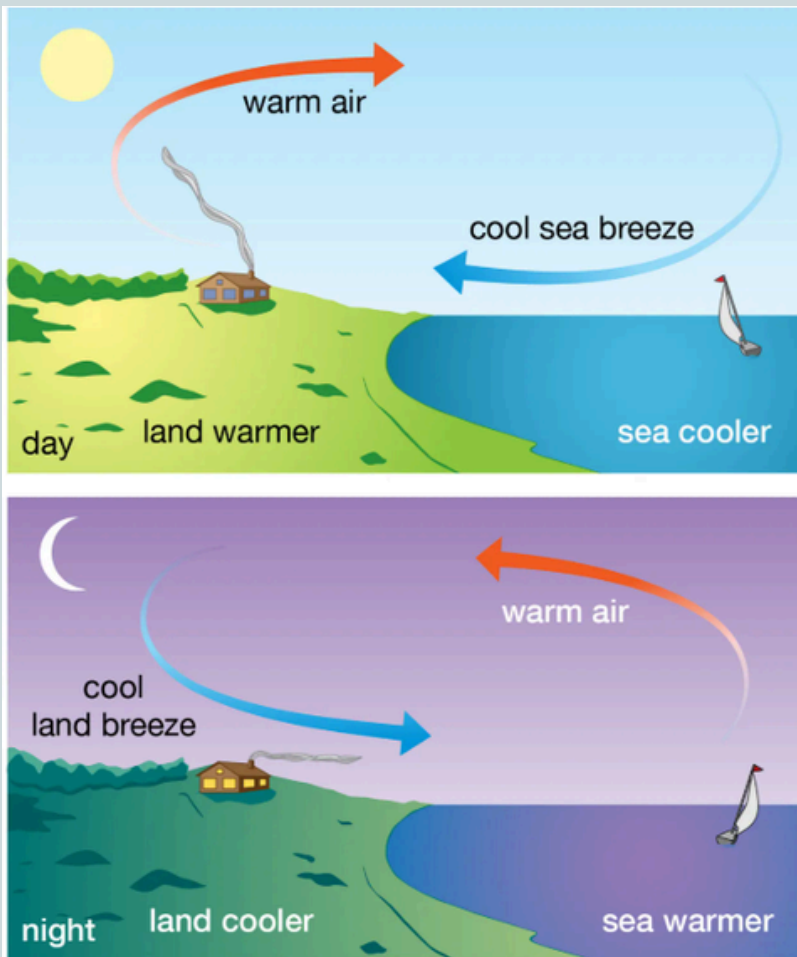

# Coastal Winds



## 1. Sea Breeze (Daytime Flying)

- Blows from sea → land (usually mid-morning to late afternoon).
- Often smooth and laminar, giving excellent ridge lift along coastal cliffs or dunes.
- Strength increases as the day heats up, peaking in the afternoon.
- Pilot note: Great for soaring, but check wind speed—what starts flyable can quickly become too strong.

## 2. Land Breeze (Night & Early Morning)

- Blows from land → sea (late night to early morning).
- Usually weaker and short-lived, but can cause offshore winds at launch sites.
- Pilot note: Offshore winds can be dangerous for coastal flying—no safe landing options if blown out to sea.


## 3. Hazards & Considerations

- Venturi effect: Wind accelerates around hills, gaps and cliffs.
- Wind gradient: Close to the ground or cliff edge, wind speed can vary sharply.
- Transition times: Shifts between land breeze and sea breeze bring turbulence and unpredictable direction changes.
- Sea thermals: On very hot days, inland thermals can “pull” the sea breeze in stronger and earlier than expected.

## 4. Best Flying Windows

- Late morning to mid-afternoon: when the sea breeze is established but not yet too strong.

Avoid early morning offshore winds and late evening transitions.

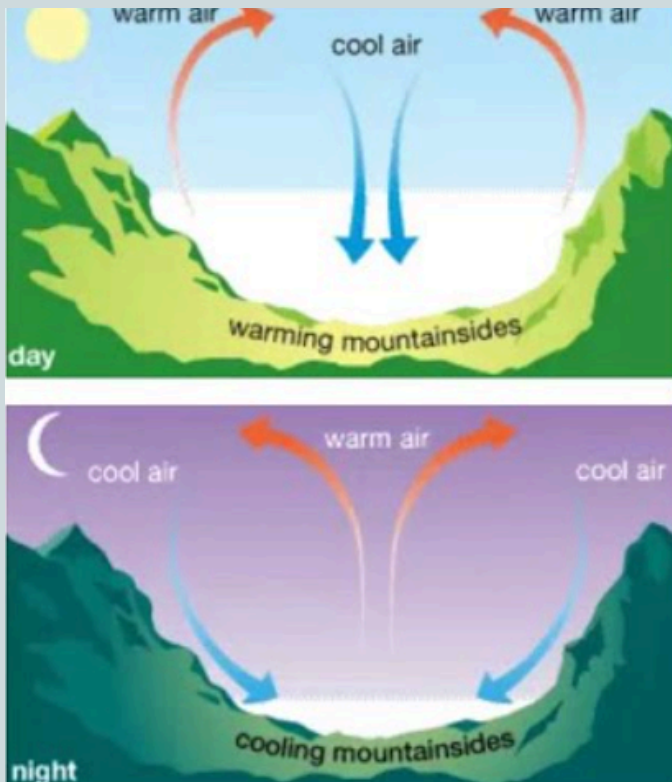

## Anabatic Wind & Katabatic Wind


### 1. Anabatic Winds (Upslope Winds)

- What they are: Gentle winds that flow uphill during the day.
- Why they form:
  - Sun heats mountain slopes faster than the air around.
  - Warm air rises upslope, drawing cooler air up from the valley.
- Characteristics:
  - Usually light (5–15 km/h).
  - Strongest in late morning to afternoon when slopes are sunlit.
- Pilot perspective:
  - Useful for thermal soaring – they help thermals trigger from sunny slopes.
  - Can provide gentle upslope lift at launch sites.
  - ⚠ Can be disrupted by strong valley winds or sea breeze intrusions.

### 2. Catabatic Winds (Downslope Winds)

- What they are: Cool, dense air flowing downhill at night.
- Why they form:
  - After sunset, slopes cool quickly.
  - Air in contact with them cools, becomes denser, and drains downhill.
- Characteristics:
  - Usually light to moderate (5–20 km/h).
  - Stronger on clear nights with rapid cooling.
  - Flow into valleys, forming drainage winds.
- Pilot perspective:
  - ⚠ Dangerous for paragliding – they blow down-slope, opposite to take-off needs.
  - ⚠ Can cause sudden direction changes around dusk or at shaded launch sites.
  - Good to understand for planning safe landing approaches in valleys.

# THERMAL FORMATION

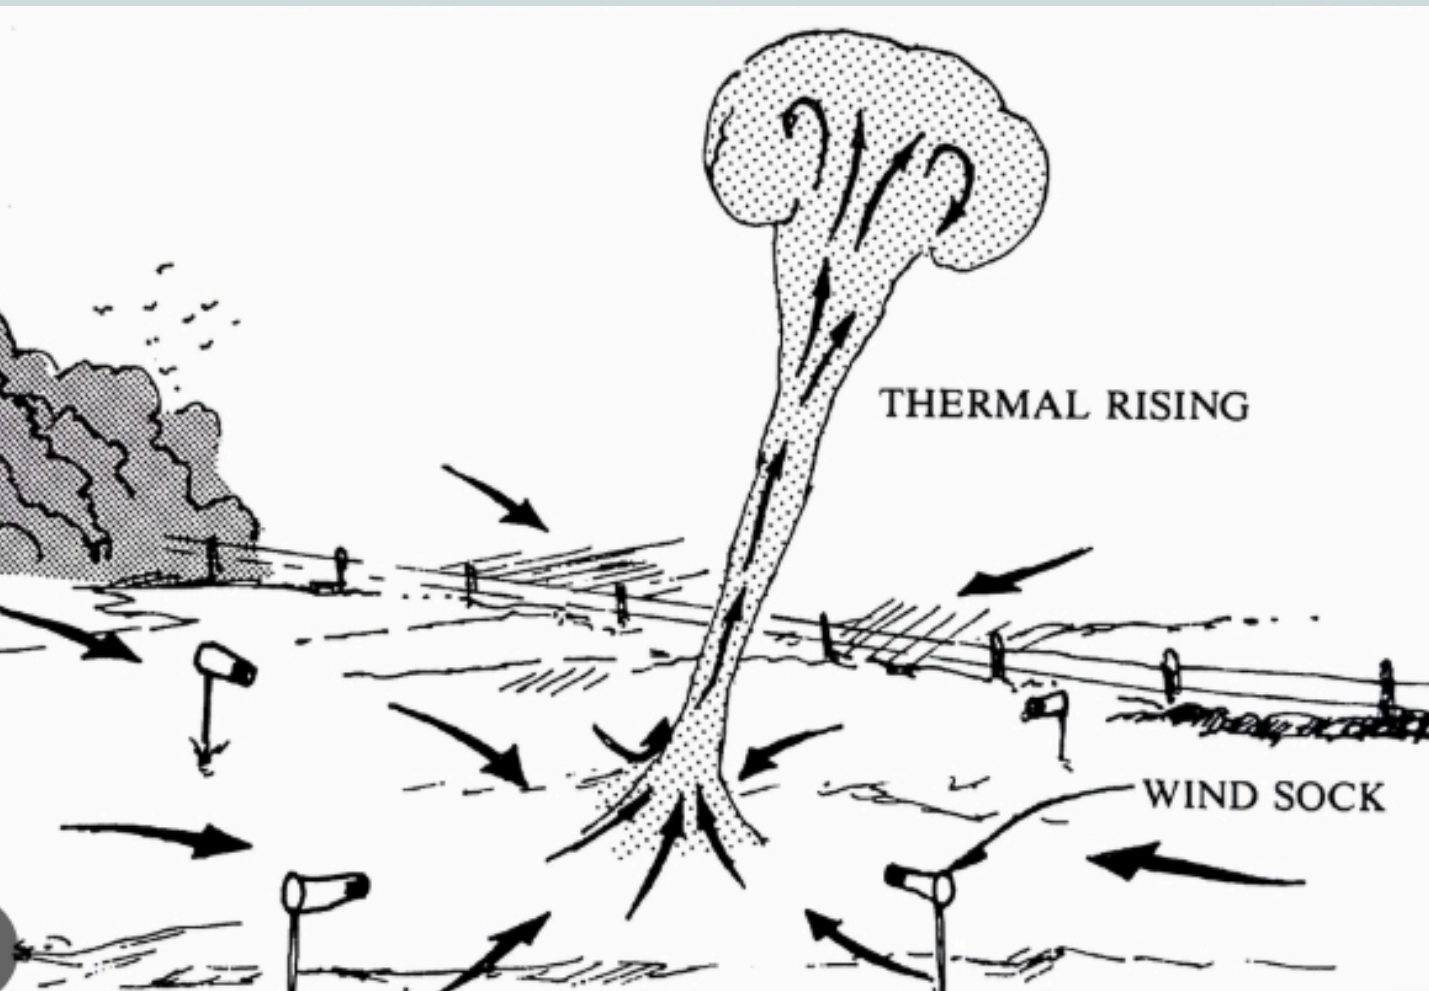


What is a Thermal?

- A rising column or bubble of warm air created when the ground heats unevenly.
- Acts like an invisible elevator that paragliders can circle in to gain altitude.

How Thermals Form

1. Sun heats the ground unevenly → dark fields, rocks, roads heat faster than lakes, forests, or wet soil.
2. Air above hot spots warms up and becomes less dense.
3. Once buoyancy overcomes surrounding air pressure, the warm air detaches and rises.
4. As it rises, it cools at the dry adiabatic lapse rate ( $\approx 1^\circ\text{C}$  per 100m).
5. If it reaches the dew point, condensation may form → creating cumulus clouds (thermal “markers”).

# Thermals- from bubbles to columns

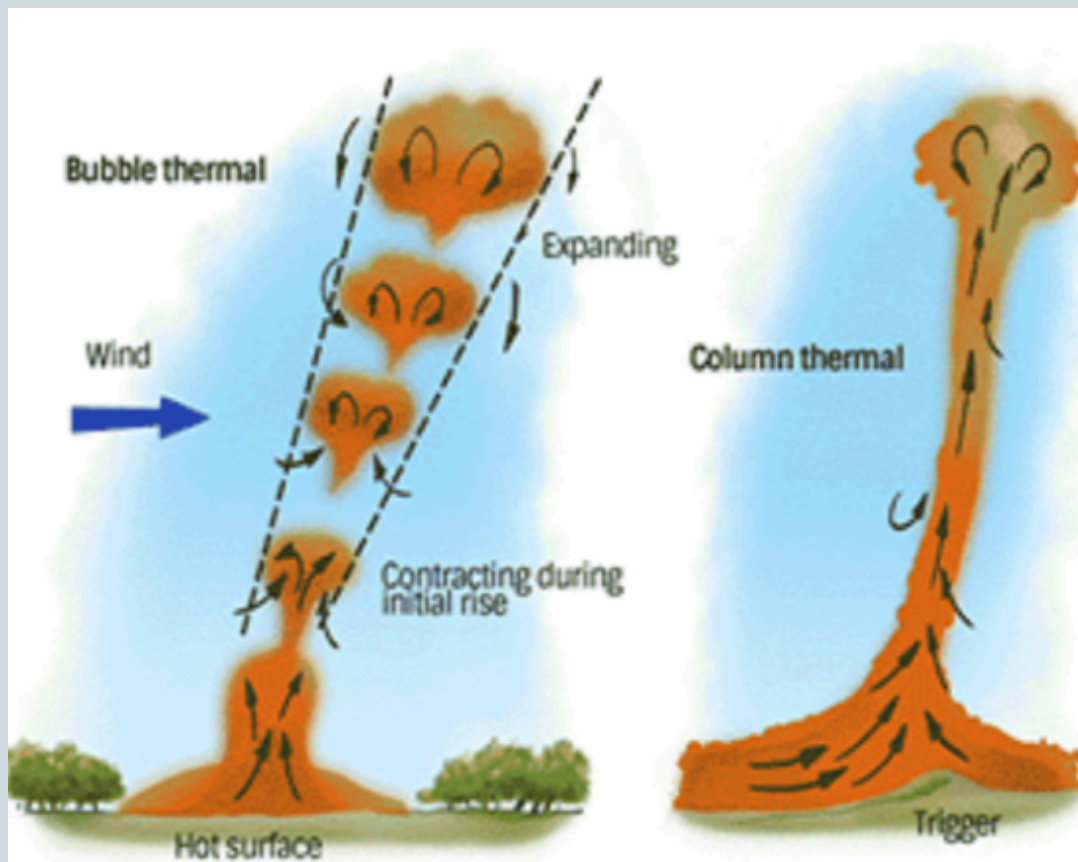

## When Thermals Trigger

- Late morning to afternoon (10 AM – 3 PM typically, earlier in deserts, later in mountains).
- Strongest on sunny days with light to moderate winds.
- Thermals usually start off as bubbles in the morning and progress into columns as the day heats up, as shown in the above image.

## Triggered by:

- Hot spots (ploughed fields, rocks, dry ground, parking lots).
- Slope orientation (sun-facing slopes heat faster).
- Boundaries (edges of forests, fields, lakes where heating contrast exists).
- Mechanical triggers (ridge lines, hills, buildings, even tree lines help the bubble detach).
- Temperature differences (when the prevailing winds push the hot air parcel towards cold land, the cold air over that land is more dense and pushes the hot air upwards)

## Pilot Clues for Thermal lift

- Birds circling (soring birds like eagles, hawks, vultures, kites are experts).
- Dust devils in flatlands. (These do indicate lift but are very dangerous for paragliders and will mostly result in a reserve deployment if you fly into one)
- Cumulus clouds forming overhead. (if the clouds is more wide then tall it is likely to be a good lift source with intermediate piloting skills)
- Wind shifts or gusts at launch → sign of thermals passing. (take off as the wind is picking up to hit the best part of the lift at take-off)
- Smell & feel: sudden warm air gusts (“thermal sniffers”).

## 🦋 Wind & Leaning Thermals

### 1. Why Thermals Lean

- In calm conditions → a thermal rises vertically above its trigger point.
- In wind → as the bubble/column rises, it is carried downwind.
- Result: the thermal is tilted or leaning in the direction of the wind.

### 2. What This Means in Practice

- At Ground (Trigger Point): Thermal starts at a hot spot (field, ridge, rocky patch).
- As It Rises: Each higher layer is blown further downwind.
- To the Pilot: The higher you go in a thermal, the further downwind of the trigger point you'll drift.

### 3. Pilot Techniques

- When searching for lift:
  - If you hit weak lift low, the stronger core may be slightly upwind of you.
  - As you climb, stay with the drift – keep circling with the moving thermal.
- At ridge or slope sites:
  - Expect thermals to detach, then lean back into the slope in light winds.
  - In stronger winds, thermals may break apart or get sheared, making them turbulent.

### 4. Wind Strength & Thermal Behavior


- Light winds (0–10 km/h): Thermals are mostly vertical, smooth, and easy to center.
- Moderate winds (10–20 km/h): Thermals lean noticeably, pilots must adjust circles downwind.
- Strong winds (20+ km/h): Thermals get torn, tilted into long narrow streaks, often forming turbulence and wind shear zones.

#### ✅ Rule of Thumb for Pilots:

- Low down → search upwind of the trigger.
- Higher up → drift with the thermal downwind.

### 🎵 Vario Beep Guide for Thermal flying


- No sound / silence → You're in sink (descending).
- Occasional slow beeps → You've brushed the edge of lift (weak thermal).
- Regular beeps, moderate pace → You're in usable lift → start circling.
- Fast, high-pitched beeps (continuous singing) → You're in the core of the thermal → tighten your turn and climb.
- Beeps slow down / fade → You're drifting out of the core → shift your circle back toward the strong side.

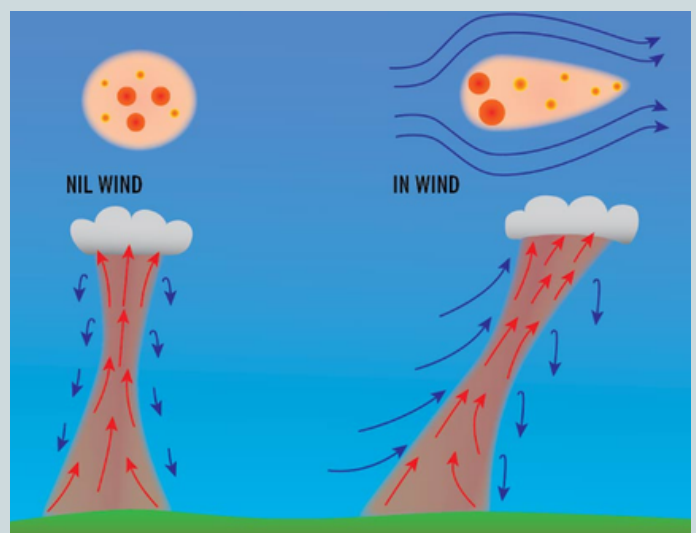

When the beeping increases open your turn a little, when it decreases tighten the turn a little.


### What a thermal looks like from the top

- core is the strongest part of the thermal and rises the fastest
- As you move away from it the lift reduces
- The core tends to rise more vertically than the other parts if a prevailing wind is involved
- the core is more to the windward side, and the rising air around it drifts more downwind

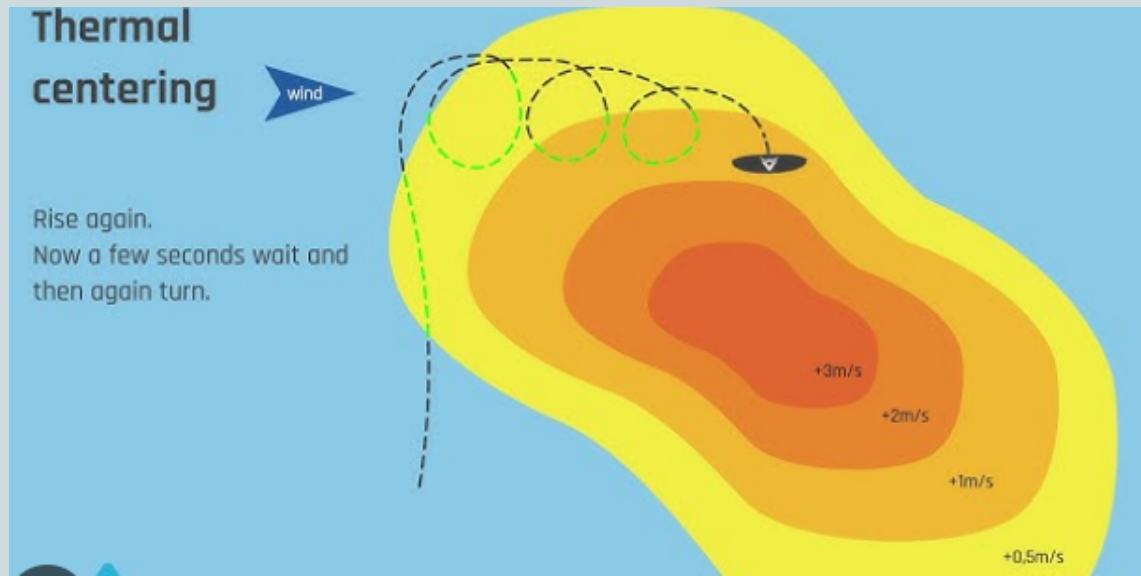


### Air law in thermals

- First pilot to enter the thermal sets the turn direction
- Lower pilots has right of way
- There are no right of way rules between sail planes and paragliders

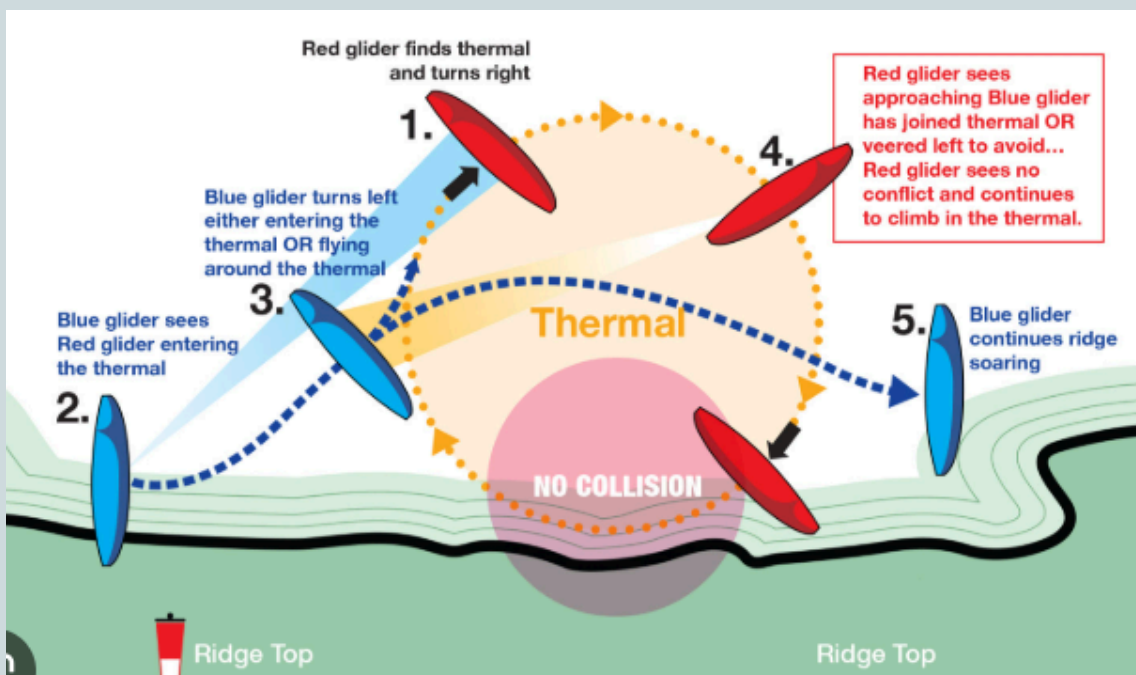

# BASIC TYPES OF CLOUDS

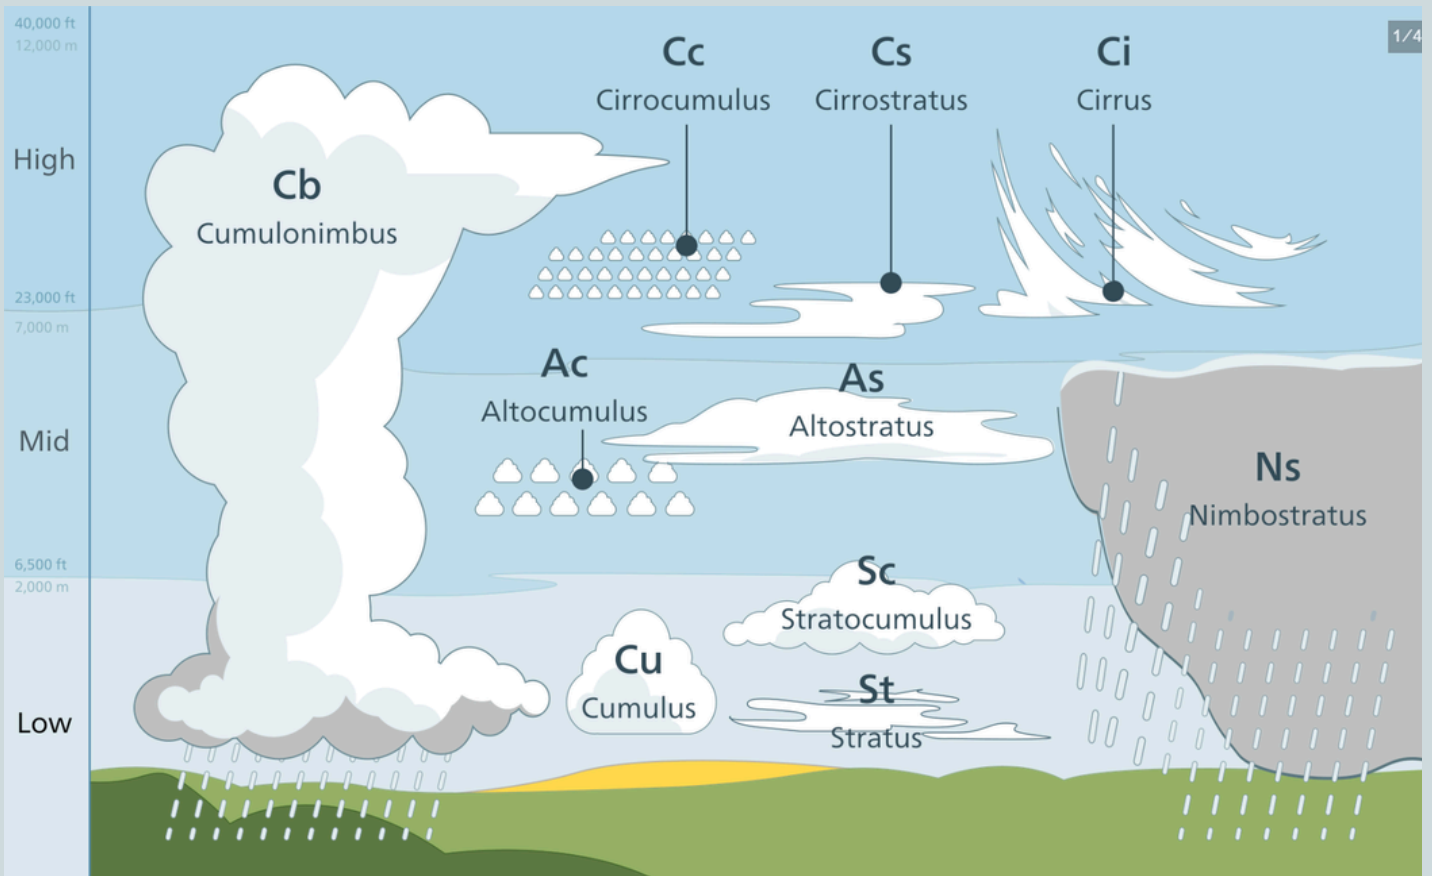

## Types of Clouds (by Height & Formation)

### 1. High Clouds (6–12 km / 20,000–40,000 ft)

- Made of ice crystals, thin and wispy.
- Usually don't produce precipitation.

Types:

- Cirrus (Ci): Wispy, feather-like → sign of moisture aloft, sometimes pre-front weather.
- Cirrostratus (Cs): Thin veil, halo around sun/moon → can mean approaching warm front.
- Cirrocumulus (Cc): Small ripples or “mackerel sky” → high-altitude instability.
- Paragliding note: Mostly not relevant for lift, but can signal weather changes.

### 2. Middle Clouds (2–6 km / 6,500–20,000 ft)

- Composed of water droplets, sometimes mixed with ice.

Types:

- Altostratus (As): Grey sheet, sun appears blurred → stable layer, poor thermal day.
- Altocumulus (Ac): White/grey patches, rolls or waves → instability above, possible convection.
- Paragliding note: Altocumulus can mean thermals are reaching higher levels.

### 3. Low Clouds (surface – 2 km / up to ~6,500 ft)

- Mostly water droplets.

Types:

- Stratus (St): Flat, grey, fog-like → stable air, no thermals.
- Stratocumulus (Sc): Lumpy grey-white layer → weak convection, often suppresses soaring.
- Nimbostratus (Ns): Thick, dark, rain-bearing → avoid flying.
- Paragliding note: Low stratus kills thermals; stratocumulus may allow short ridge soaring.

### 4. Clouds with Vertical Development

- Formed by strong convection / thermals.

Types:

- Cumulus (Cu): Puffy “cotton balls” → excellent thermal markers.
- Towering cumulus (TCu): Tall cauliflower-like → strong thermals, turbulence likely.
- Cumulonimbus (Cb): Thunderstorm clouds, anvil-shaped top → extremely dangerous (gust fronts, overdevelopment, lightning).

Paragliding note:

- Cumulus humilis (“friendly cu”) = best soaring days.
- Cumulus congestus / Cb = land immediately.

# Images of types of clouds



Cirrus clouds



Cirrostratus clouds



Cirrocumulus clouds




Altostratus clouds



Alto cumulus clouds

Lower clouds

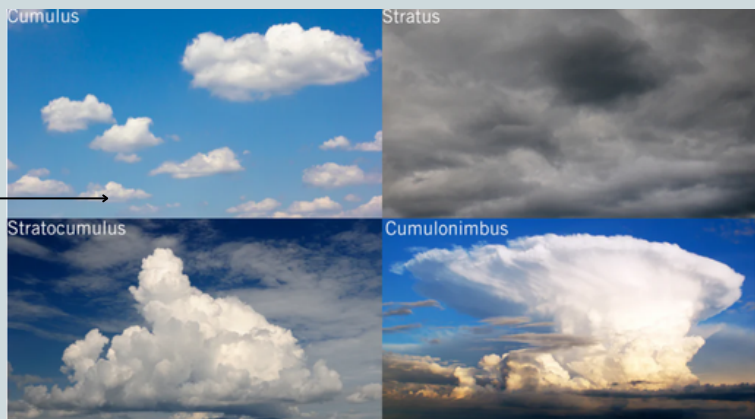

# THUNDER CLOUDS

## Formation of Thunderstorms

### 1. Ingredients Needed

- A thunderstorm needs 3 key conditions:
- Moisture → provides fuel for cloud growth.
- Instability → warm air near the ground, cooler air aloft (so rising air keeps rising).
- Lift/Trigger → something to push air upward (heating, mountains, convergence, or a front).

### 2. Stages of Thunderstorm Development

#### Stage 1: Cumulus Stage (Developing)

- Strong heating creates powerful thermals.
- Warm air rises, cools, condenses → cumulus cloud grows upward.
- Updraft dominates (air only moving upward).
- Paragliding note: Feels like very strong, punchy thermals.

#### Stage 2: Mature Stage (Active Thunderstorm)

- Cloud top reaches high altitudes (10–20 km).
- Updrafts + Downdrafts coexist → turbulence is violent.
- Heavy rain, hail, lightning, strong winds, gust fronts form.
- Cloud often develops an anvil shape at the top (spreading out at the tropopause).
- Paragliding note: Extremely dangerous – never fly near towering cumulus or anvil clouds.

#### Stage 3: Dissipating Stage

- Downdraft dominates, cutting off the updraft.
- Rain falls, storm loses energy.
- Outflow winds can still be hazardous.
- Paragliding note: Gust fronts and turbulence remain dangerous even after rain starts.

### 3. Dangers for Pilots

- Gust fronts → sudden ground-level wind shifts (can exceed 50+ km/h).
- Overdevelopment → thermals become too strong and join into one massive updraft.
- Suction into cloud → pilots can be pulled thousands of meters up (life-threatening).
- Lightning & hail → direct hazards.

#### Rule of Thumb for Paragliding Pilots:

- If cumulus clouds grow rapidly into towering cumulus, land immediately.
- Never underestimate the speed at which a thunderstorm can develop (sometimes <30 minutes).



# INSIDE A THUNDERSTORM

## 1. The Core Updraft

- Warm, moist air rockets upward in the central column.
- Speeds can exceed 30–50 m/s (100–180 km/h!).
- Carries water droplets high above the freezing level → supercooled water + hail formation.
- Pilots caught here can be sucked thousands of meters up, sometimes into oxygen-starved, freezing altitudes.

## 2. Downdrafts

- Cold, rain- and hail-loaded air plunges downward.
- Can descend at 20–30 m/s.
- When this hits the ground, it spreads outward as a gust front (violent wind shift at the surface).

## 3. Turbulence Zone

- Where updraft and downdraft meet, violent mixing occurs.
- Produces severe turbulence, shear, and rotor-like motions.
- Absolutely unflyable – gliders can collapse uncontrollably.

## 4. The Anvil & Upper Levels


- Rising air hits the tropopause and spreads horizontally, creating the anvil shape.
- At the edges of the anvil, descending air forms overshooting tops and spreading cirrus.

## 5. Hazards Inside

- Hail: carried up and down repeatedly inside → grows larger before falling.
- Lightning: electrical charges build between cloud regions → constant strikes.
- Extreme vertical movement: alternating violent lift and sink.
- Hypoxia & freezing: if lifted to 6,000–9,000 m, oxygen deprivation and frostbite set in.

## ✓ Pilot Lesson:

- A thunderstorm is not just “strong lift” → it is a chaotic engine with lethal updrafts, downdrafts, turbulence, lightning, and hail.
- Even being within 10–20 km of a storm can expose you to gust fronts or suction effects.

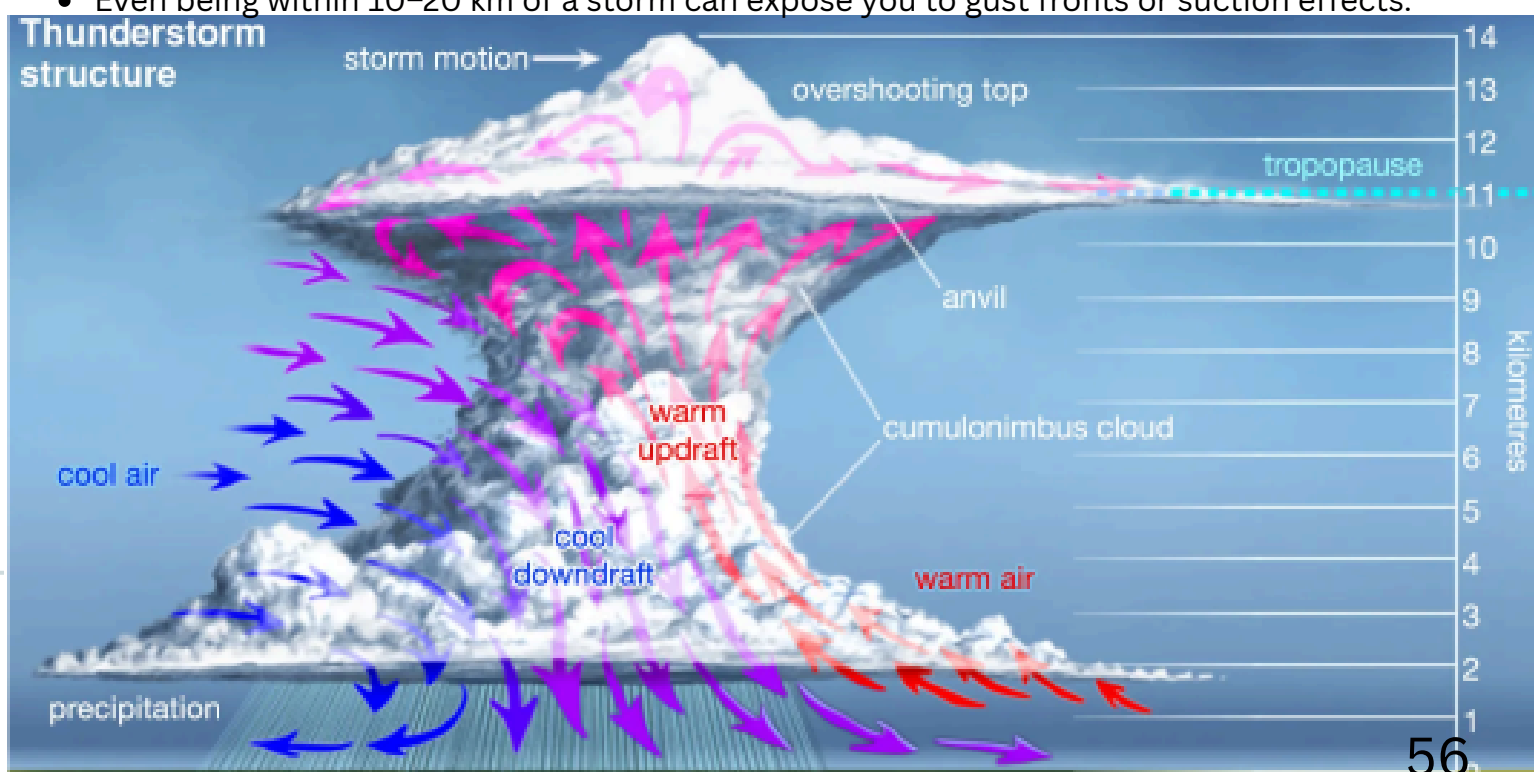

# FOEHN WINDS



## • Foehn Wind Formation

### 1. Basic Process

1. Moist air approaches a mountain range (usually with a strong synoptic wind, e.g., westerly flow in the Alps).
2. As air is forced up the windward slope, it:
  - Rises → expands → cools at the dry adiabatic lapse rate ( $\approx 1^\circ\text{C}$  per 100 m) until condensation begins.
  - After condensation → cools slower at the moist adiabatic rate ( $\approx 0.6^\circ\text{C}$  per 100 m).
  - Clouds and precipitation often form on the windward side.
3. After crossing the crest, the now drier air descends the leeward slope:
  - Compresses and warms at the dry adiabatic rate (since it has lost much of its moisture).
  - Result: hot, dry, turbulent winds on the lee side.


### 2. Characteristics of Foehn Winds

- Warm and dry (relative humidity drops fast).
- Strong, gusty, turbulent.
- Can exceed 50–100 km/h in valleys.
- Associated with lenticular clouds, rotor clouds, and violent turbulence in the lee.


### 3. For Paragliding Pilots

#### ⚠ Foehn = Hazardous Conditions

- Strong down-valley winds in the lee → make launches and landings dangerous.
- Rotor turbulence behind ridges → severe collapses possible.
- Sudden onset → conditions can deteriorate in minutes.
- Cloud signs: Lenticular clouds, rotor clouds, cap clouds = red warning flags.

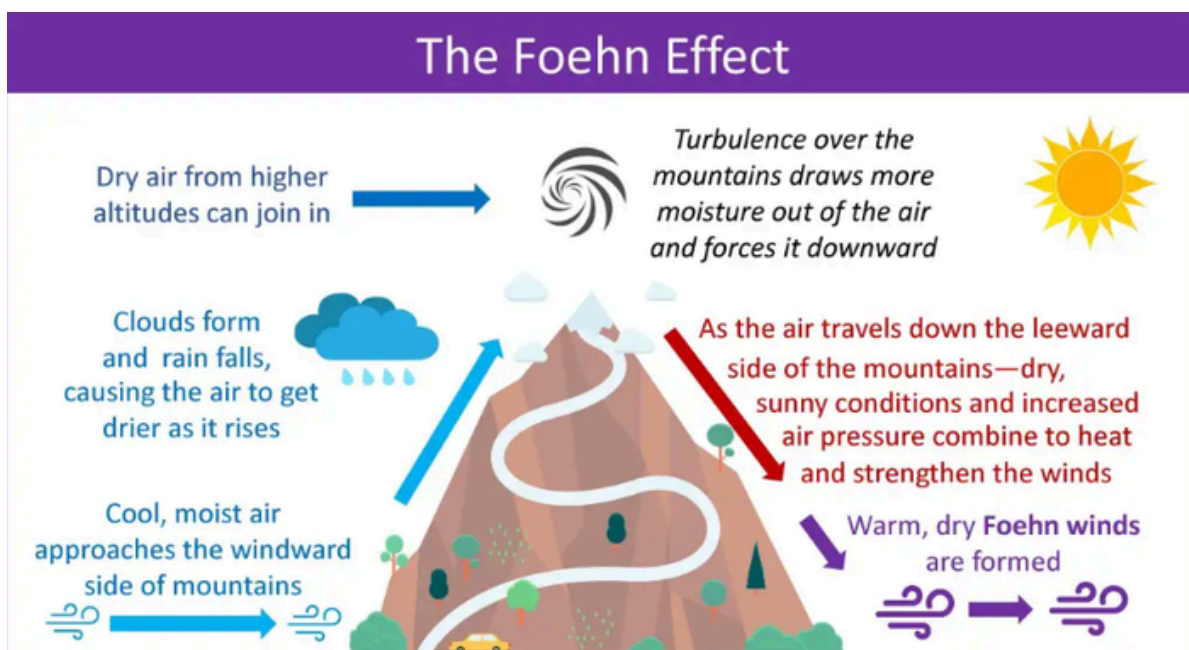

# STABLE DAYS AND UNSTABLE DAYS

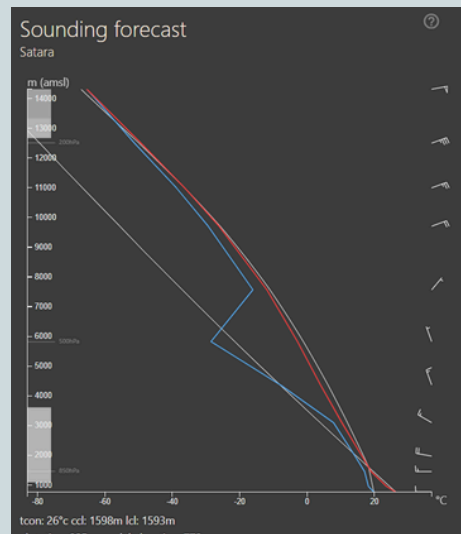

Stable vs Unstable Day (using Skew-T on Windy app)  
On a stable day, the Skew-T diagram shows that the actual temperature line (red) stays close to or to the right of the dry adiabat followed by a lifted parcel. This means that if a thermal bubble rises, it quickly becomes cooler than the surrounding air, so it stops rising. The atmosphere resists vertical movement, leading to weak or no thermals. Expect smooth air, poor climb rates, and limited cloud formation.

On an unstable day, the temperature line (red) lies to the left of the lifted parcel line (dry/moist adiabat). A rising parcel stays warmer than the surrounding air and keeps climbing. This allows strong thermals, tall cumulus development, and sometimes overdevelopment into thunderstorms. For pilots, this means more lift, higher cloudbase, but also potentially turbulent conditions.

In simple terms:

- Stable Skew-T → weak or no thermals, smooth air.
- Unstable Skew-T → strong thermals, cumulus clouds, possible storms.

# SITE ASSESSMENT



## Things to pay attention to in ridge soaring

1. Wind direction- this determines which side of the ridge is in the windward side and is creating lift and which is on the lee and creating a rotor. Remember the wind direction also plays a role in the amount of lift created, the more perpendicular the wind is to the ridge the more lift it will create. If the wind is crossed lets say about  $45^\circ$  to the ridge it will not only create less lift but also cause you to drift more to one side and it will take more time to fly the other way. Further with a cross wind rotors can form behind ridge fingers as shown in the above finger on the right side in red. The wind direction also causes areas of venturi/compression where the wind speed is greater than the area around it, these areas can be strategically used in lesser wind speeds to gain height but should be avoided at faster wind speeds to avoid getting pushed back.

2. Wind speed- our paragliders have a limits on how fast they fly, if the wind speed is more than their top speed they will fail to move forward. Most En-A gliders have a trim speed of 35km/h, it is important not stay within 25km/h to avoid risks of getting caught in venturi areas. Stronger the wind the stronger the rotor areas as well, so you really do not want to get pushed back into them. If you do find yourself in a situation like this, try to gain as much height as you can in front of the ridge and as soon as you stop gaining height turn around and hope to fly over the rotor and land beyond it. Remember that the next hill/mountain may start before the rotor ends in which case get ready for a difficult landing.

3. Wind cycles- the wind has a tendency of varying in a matter of seconds, they usually speed up by a few km/h then calm down and repeat. If the changes are within 5-8km/h it is usually safe to fly, beyond this limit you may still be able to fly but keep your skill level in mind, it is likely to be a bumpy ride. You also need to pay attention to the rate of the change in speed the more drastic the change the punchier the sky is likely to be.

Try to take off as the wind is picking up since you will fly straight into the lift and gain some additional height straight for the take-off.


4. Terrain inclination and height- The more inclined the slope the more lift it creates, however the compression areas are also exaggerated. Similarly the higher the ridge the more the ridge lift created, however this is not the rule for thermic sites.

# SITE ASSESSMENT

## Things to pay attention to on thermic sites

### 1. Launch Area

- Orientation/aspect (does it face the sun and prevailing wind during thermal hours?)
- Slope angle and smoothness (easy inflation vs. tricky launch)
- Surface (grass, rock, loose soil – affects safety and glider care)
- Size (enough room for multiple gliders and safe aborts)
- Obstacles (trees, poles, rocks, fences)
- Wind consistency (avoid strong crosswind or rotor zones)



### ◆ 2. Landing Options

- Primary landing field (large, flat, obstacle-free, safe approach paths)
- Alternate/emergency landings within glide
- Out-landing terrain (farmland, rivers, trees, power lines, buildings)
- Retrieval access (roads, vehicle accessibility, permissions)

### ◆ 3. Thermal Potential

- Sun-facing slopes and trigger points (rock faces, ridges, dark fields, buildings)
- Valley orientation (does it funnel valley winds that help or hinder?)
- Typical daily cycle (time thermals start, peak, and die)
- Strength, consistency, and altitude of thermals (climb rates, cloudbase height)
- Influence of sea breeze or valley wind convergence
- Time of day (the higher the sun the stronger the thermals relative to the strength of thermals of the day)

### ◆ 4. Meteorological Factors


- Seasonal suitability (months with reliable thermal activity)
- Local wind systems (anabatic/catabatic, sea/land breeze, föhn, convergence lines)
- Risk of overdevelopment (thunderstorms)
- Cloud indicators (cumulus, towering cu, blue thermals)

### ◆ 5. Airspace & Regulations

- Proximity to controlled or restricted airspace
- Maximum altitude allowed (legal ceiling vs. cloudbase)
- Nearby airports/airstrips and aviation activity
- Local flying rules, permits, landowner agreements

### ◆ 6. Hazards

- Power lines, wind turbines, radio towers
- Gullies, cliffs, or venturi zones
- Rotor zones behind ridges/obstacles
- Wildlife (nesting birds, animals in landing fields)
- Weather hazards (strong wind shear, turbulence, storms)

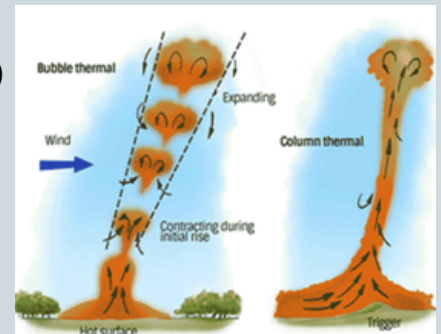


### ◆ 7. Access & Logistics

- Road access to launch and landing
- Parking, water, shelter availability
- Mobile network coverage for coordination/rescue
- Distance/time to nearest hospital or rescue point


### ◆ 8. Pilot Suitability

- Minimum pilot level (Beginner / Intermediate / Advanced)
- Suitable glider classes (EN-A/B/C, comp wings)
- Maximum safe wind speed/gusts
- Radio requirement for communication
- Max pilots in air safely

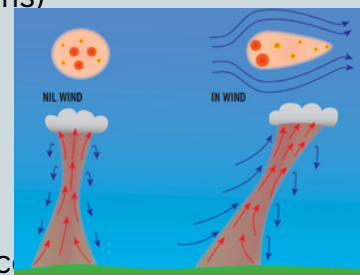



# RESERVE DEPLOYMENT

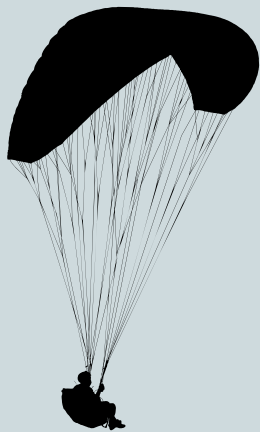

---

## When to deploy the reserve


1. Height from the ground.

Anything going wrong close to terrain with not enough time to recover, throw

2. Something gone wrong that cannot be recovered, carabiner failure, fabric rupture, risers twisted more than 720°, throw immediately

3. Something recoverable like mid-air collisions, spirals, auto-rotations, wait and deploy correctly.

# RESERVE DEPLOYMENT

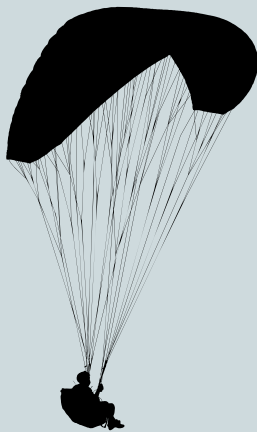

---

## How to deploy

We often see pilots throw the reserve and the reserve getting entangled in the paraglider.


To avoid this from happening, we need to understand what the glider is doing before we throw our reserve.

Situation 1. you are going straight down and the glider is on top of you, stalled. Equipment failure- torn, carabiner broken, etc. You should throw towards the horizon.

Situation 2. you have a rotation like that of a spiral dive, center of rotation is below your harness, glider is pointed towards the ground and moving fast towards the ground, Throw upwards,

Situation 3. You have a SAT like rotation where the center of rotation is between you and the wing. This is the most tricky to deploy, you have to throw very hard towards the trailing edge, preferably when the glider is at its highest point in the rotation, the reserve needs to open before the glider in its rotation comes back to grab it.

# RESERVE DEPLOYMENT

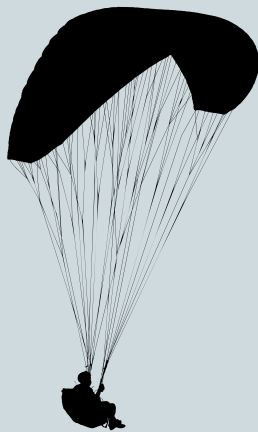

## What to do after deploying


Once the reserve opens it will give you a small window to pull in your glider. Using the brakes and c risers is ideal to pull the glider in, however pull the glider towards you using what ever you manage to get a hold off. Always fly with gloves

Remember to use the PLF landing method when you get to the ground to prevent any injuries.

Remember to radio the other pilots and mention your location, physical condition, and weather you require help or not.

Lastly fill an incident report with the association responsible in the area

# PLF

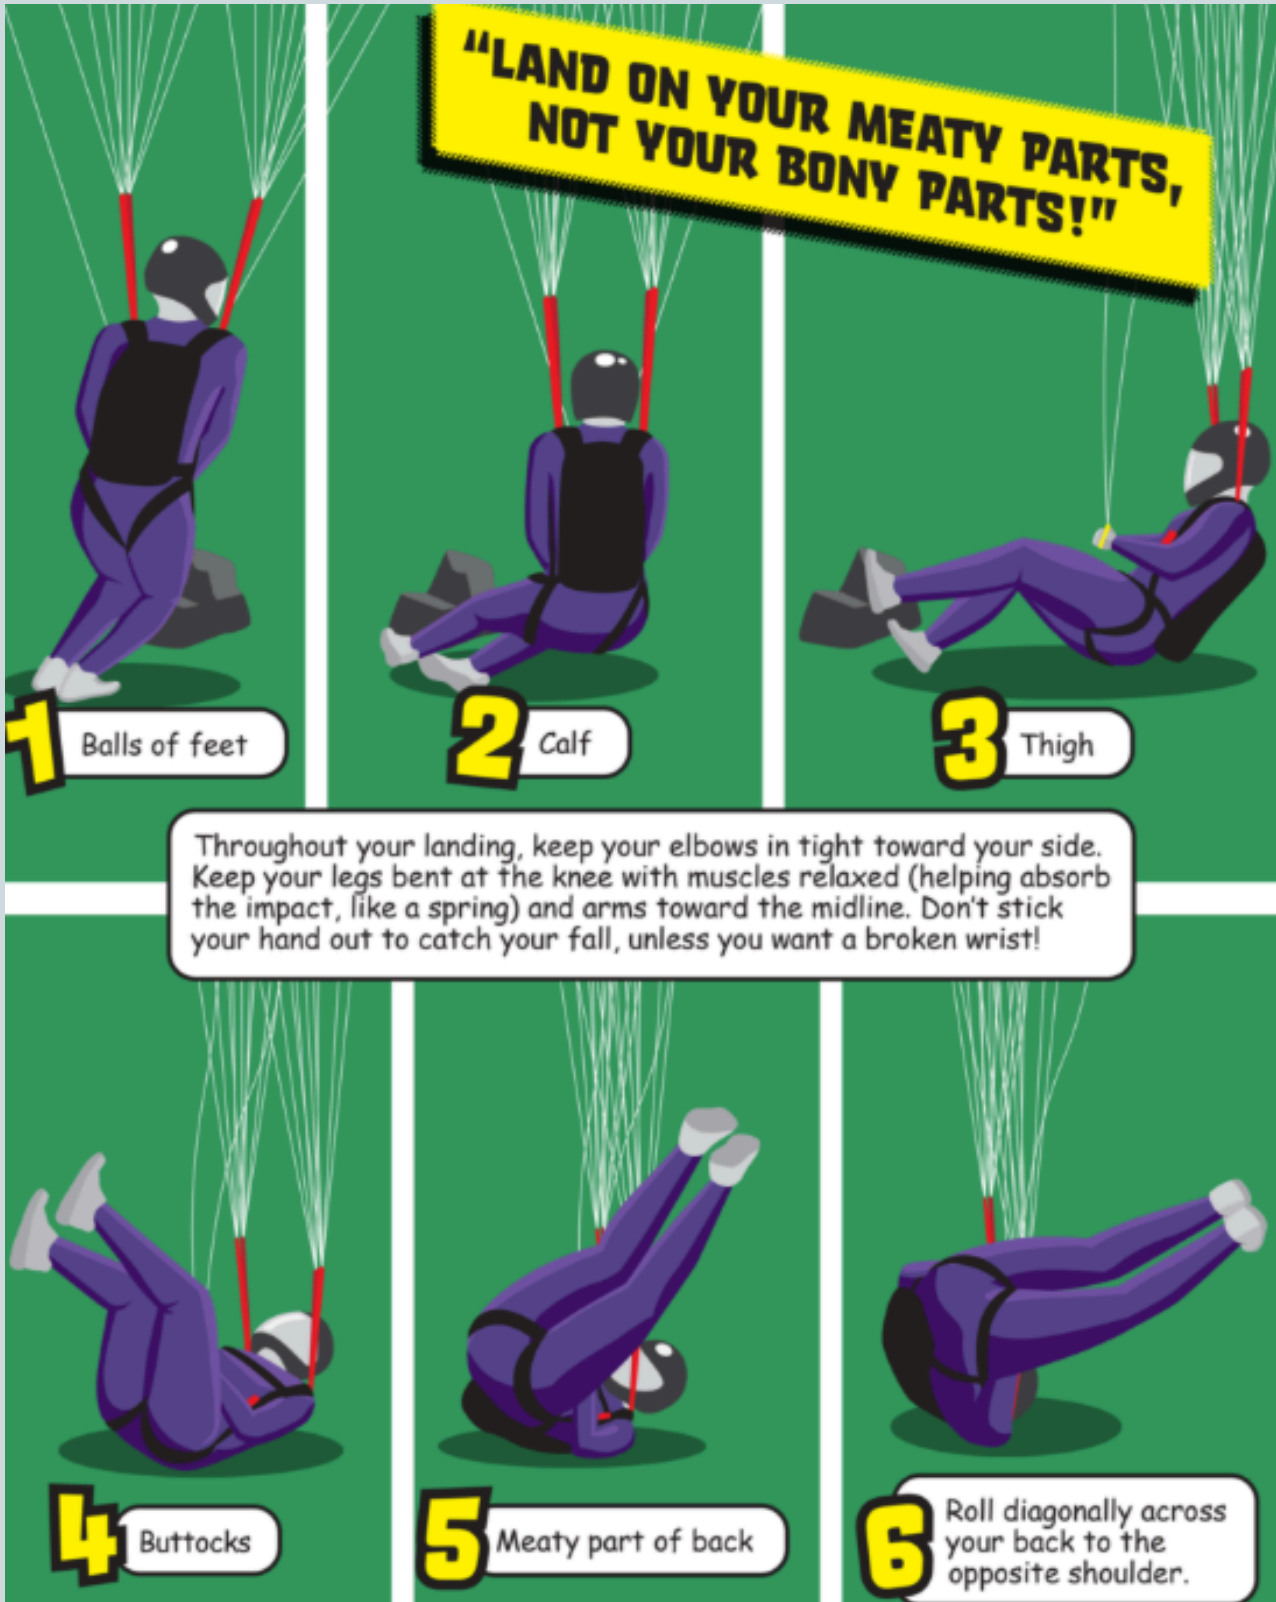

# DIFFERENT TYPES OF FLYING

## 1- RIDGE LIFT/ LIFT BAND

### What is a ridge lift/lift band?

When air hits terrain with an elevation it can not pass through it, and hence is forced upwards or passes to the sides of the ridge.



When a paraglider keeps itself inside the section of rising air it negates the sink rate of the glider often leading to traveling up in altitude which increases the duration of the flight. As long as the glider is inside and active lift band it will continue to rise.

### When does a glider stop rising in the lift band?


Lift bands created by the ridge will always have a maximum height they can reach above the top of the ridge. This maximum latitude is determined by the angle the wind hits the ridge at and the strength/ speed of the wind. The height of the ridge also factors into the amount of lift created. Your glider loading also plays a role in the height you gain on ridge lift, e.i, the lower your total wing loading on the glider the higher you will go. After a glider has reached the maximum height the lift band has to offer it stopes rising from that point but maintains the altitude.

If you choose to descend you must fly out of the lift band by flying away from the ridge until you find that you have stopped rising.

If you accidentally loose height and want to go back up you can slowly maneuver your way closer to ridge until you find lifting air.

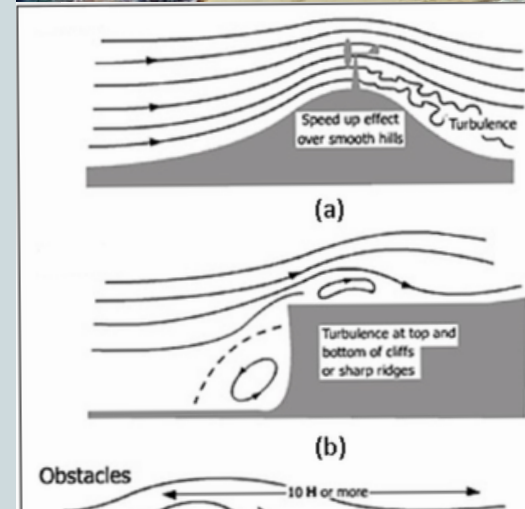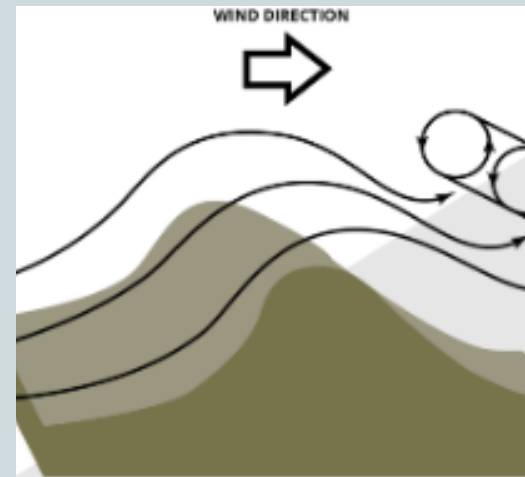

# Visual representation of ridge lift

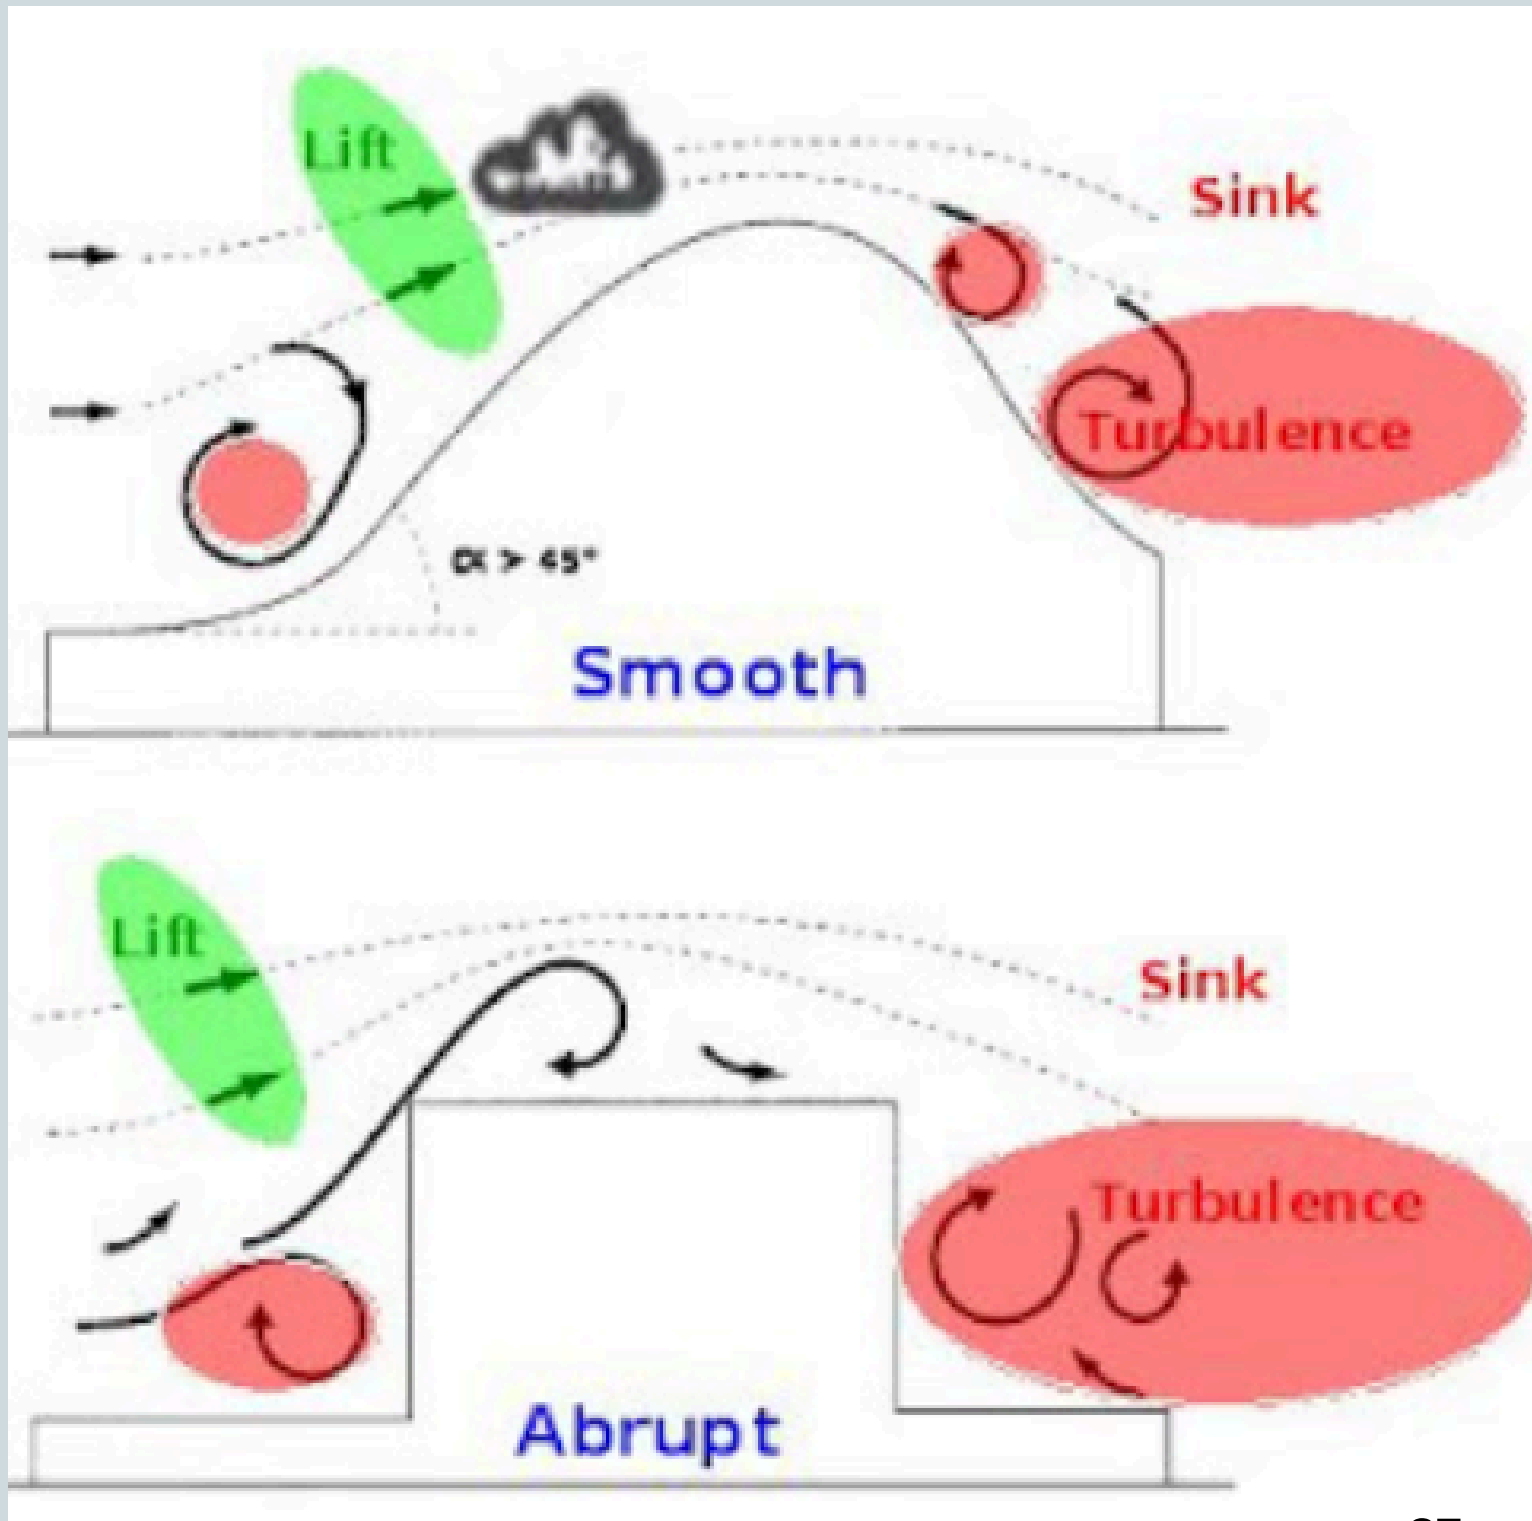

# 2- Thermal flying

We learnt how thermals looked and behaved in the section on micro weather, now lets see how we use them to gain height and fly.

## ☀️ What is a Thermal?

- A thermal is a rising column or bubble of warm air created when the ground heats unevenly.
- Common sources: bare rocks, ploughed fields, dry slopes, roads, and urban areas.
- Thermals are strongest in mid-day / early afternoon when solar heating is most intense.

## 🪂 Finding Thermals

- Visual Clues
  - Cumulus clouds forming above → likely thermal trigger below.
  - Dust devils, birds circling, other gliders climbing.
  - “Trigger points” such as ridges, tree-lines, or changes in terrain.
- Feeling in Flight
  - Wing lifts on one side → you’ve hit the edge of a thermal.
  - Sudden rise in vario beeps.
  - Reduced sink rate before strong lift.

## 🔄 Entering the Thermal

- Fly straight into lift until you feel it strongest.
- Begin a gentle 360° turn (bank angle ~20–30°).
- Adjust your circle to center the strongest lift:
- If lift is stronger on one side → shift circle toward that side.
- Keep vario beeping smooth and continuous.

## 🎯 Centering Techniques

- Listen to your vario: faster beeps = stronger lift.
- Shift your circle each turn toward the stronger side.
- Tighten turn in strong cores, widen in weak lift.
- Use weight-shift + brake for smooth control.

## ✅ Climbing Efficiently


- Stay relaxed, let the wing “breathe.”
- In rough thermals, fly with more brake pressure for feedback.
- Keep the glider slow so as to stay in lifting air.
- Avoid chasing every bump; focus on consistent lift.
- If you lose the core: straighten, fly out, and re-enter.

## ⚠️ Safety & Awareness

- Always look out for other gliders in the thermal → join the same direction of turn.
- Watch for cloud suck (if cumulus base is low). Leave before being pulled in.
- Be aware of drift: thermals move with the wind.
- Stay alert for changes in lift and the sheer layer on entry and exit.

## 🪂 Quick Thermal Drill (for students)

- Feel lift → enter 360.
- Center lift → adjust circle.
- Stay efficient → smooth control, avoid over-braking.
- Monitor drift + cloud base.
- Exit safely → straighten out before leaving.

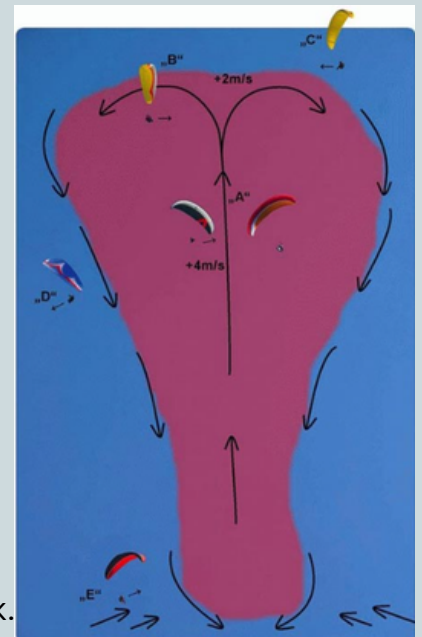



# 3. Cross-country

Equipment selection- 68

Route planning- 69

Airmanship- 70

Flying with clouds and birds- 71

Food and water- 72

Out-landing- 73

Taking off in high altitudes-


Progression path- 74

# Equipment selection



## Glider

When deciding which glider you use for your XC journey, consider starting off with a high A or a low B, these gliders will give a fair amount of passive safety and enough performance to meet your goals. Most pilots prefer to stay on B or C throughout their flying journey. Flying En C/D gliders, the risks involved in flying the glider significantly increase.




## Harness

For XC flying you will now have to choose whether you want a pod harness or not, up-till now having a pod would not have helped your flying journey however now you can consider it. Using a pod will help improve your gliders performance by reducing drag due to its shape. A pod is also more likely to twist in case of a collapse which is the added increased risk factor.



## Instruments

Apart from the radio it may be a smart idea to buy a variometer, beeper, camera (with stick) and a tracker. These instruments will give you more information about thermals, will give you your flight track and can also be instrumental in learning where to go and how to conserve height.

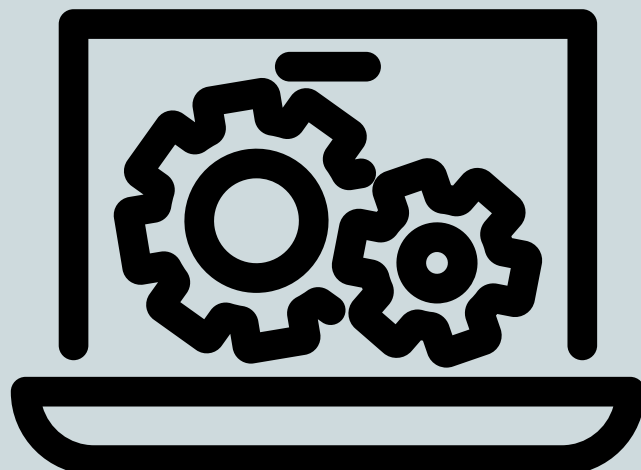

# Route planning

## In Bir, as an example

- **Low line** ■


This line is used when the Lifted condensation level (LCL) is low. It is easier to use in a tailwind which usually occurs in the mornings. Start by going to the house thermal and then aim for the highest point on +1. The below image gives you a general idea of how to progress towards Big Phase. This line does not give you much error margin to find lift. It is the most likely line to bomb out.

- **Mid line** ■

This is the most used line, It works well in mild tail and head winds. It is also the most crowded line in the month of October. You can start off in the house thermal, climb up the ridge and find the next thermal on the take-off ridge itself. After getting high on the second thermal head to +1. This line has a lesser chance of bombing out.

- **High line** ■

This line can only be used on high LCL days. Most pilots start off from the upper take off and head to what locals call the -0.5 thermal. Then climb all the way to the top of the ridge. At that point you will gain a stunning view of the Himalayan back mountains, which as usually covered in snow, along with some glaciers. Once you are on top follow the ridge line all the way to “Dam ridge” and then work your way down a little, the crossing to big phase is safest and fastest from the mid line from that point.

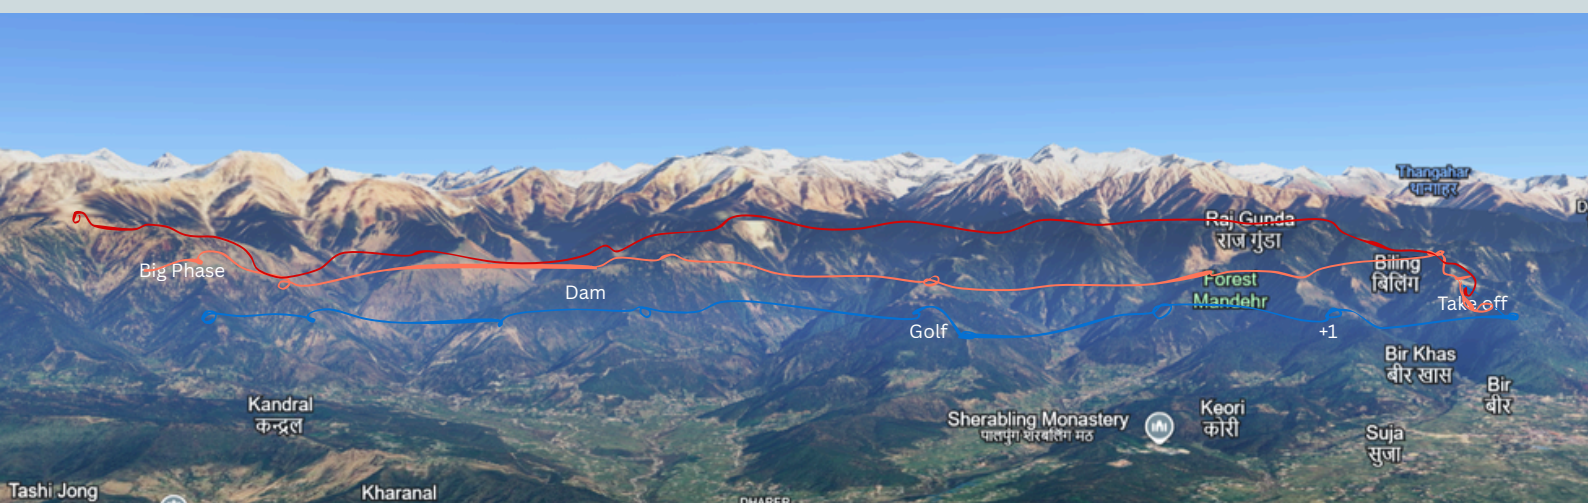

# Airmanship

The duration and distance of your flight depends on your ability to find thermals. Pilots need to develop a good understanding of thermal triggers and thermal drift to find thermals.

When there is rising air, there is sinking air too. Pilots need to understand where they will find sinking air to avoid flying there or use the correct speed to fly if sinking air is unavoidable.

Flying with other gliders greatly improves your chances of finding thermals so gaggle flying is very helpful in cross country flying. Always keep in mind that others are helping you do things that you cannot do alone and be respectful of other gliders around. Know and follow all air laws and right of way rules. You always give right of way, never take it as a right. Don't let ego clash turn into a mid air clash.



# Flying with clouds and birds.

This is the dream most paragliders live for. Flying like birds among the clouds is somehow etched into human existence as a form of the ultimate freedom. Clouds and birds show us where the lift is. Clouds through their shapes, shades and sizes talk to us, as pilots, we must understand their language. Just like knowing a local language increases acceptance, knowing the language of the clouds is important to feel at home in the sky. Birds circle in a thermal and show us where lift is but they may also be circling over a carcass. Learn how to read them.

This learning process takes time, till then, stay away from clouds. If you land up in a cloud or near it, use a descent technique like big ears and speed bar, use a magnetic compass to maintain heading.



# Food and water

## Water

Hydration system (CamelBak or similar):

A bladder with a drinking tube routed to your shoulder strap is the best option. It allows you to sip frequently without letting go of the brakes.

- Capacity:

1–1.5 L is enough for a 2–3 hour flight.

2–3 L is recommended for 4–6+ hour XC flights in hot or dry conditions.

- Practical tips:

Fill only  $\frac{2}{3}$  if you're flying shorter, to save weight.

Avoid carbonated drinks (they expand with altitude).

Use electrolyte tablets/powder if you're flying in hot weather to prevent cramps.

## Food

- Quick-access snacks:

Place high-energy, easy-to-open food in your cockpit or harness side pocket so you can eat one-handed.

- Examples:

Energy bars (cut them into halves to avoid wrestling with wrappers)

Nuts and dried fruits

Bananas or soft fruit (but they can get squished—wrap in foil)

Small sandwiches or wraps (flat bread works better than sliced bread)

Dates or chocolate for quick sugar boosts

- Avoid:

Messy or greasy food (difficult to handle in flight)

Items with loud wrappers (they flap and distract)

Very salty food without extra water

Practical Carrying Setup


- Cockpit bag: Perfect for snacks, even small thermos. Easy to reach mid-flight.

Harness side pockets: Backup storage for bulkier food.

Hydration bladder in harness back pocket: Tube clipped near chest strap for hands-free use.

## Other Considerations

- Pee system: If carrying a lot of water, plan for relief (pee tube, condom catheter, or landing strategy).
- Altitude: Appetite often reduces at high altitude, but keep nibbling—low blood sugar reduces concentration and decision-making.
- Emergency food: Always keep a spare bar in case you land far from civilization.

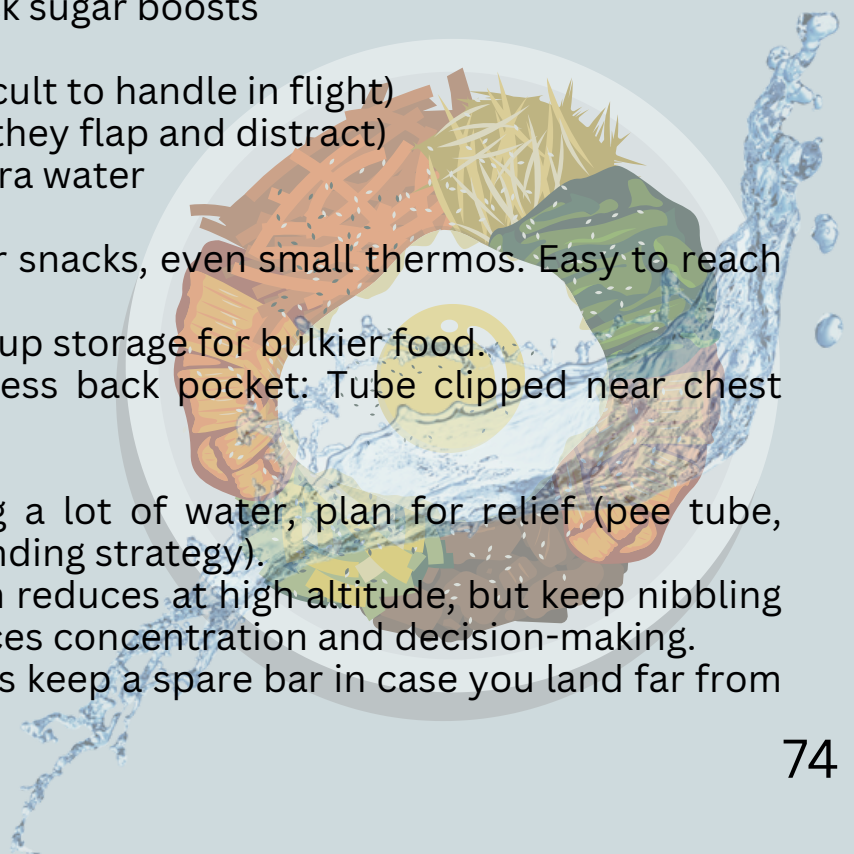

# Out-landings

## 1. Slope Gradient

- flat or gently sloping fields, are ideal.
- Land into the slope if it's not too steep (helps slow down), consider this only if you are landing into wind.
- Avoid steep downhill slopes—glider overshoots and drags.

## 2. Terraced Fields

- Terraces can be dangerous: narrow, uneven, with stone walls or drops.
- If forced, land along the longest flat terrace, then flare strong.
- Best avoided if other options exist.

## 3. Crops and Surface

- Green grassy fields or harvested land = best choice.
- Sugarcane, tall maize, or similar: bad—hard to see wires/holes, glider gets tangled, these can often look like good grass fields to land on from the air, however they are dangerous. try to land in harvested fields to avoid confusion.
- Rice paddies: soft but muddy; avoid if possible unless safe landing area is limited.
- From the sky:
  - Bright green, shiny, tall = usually bad (dense crops).
  - Brown/golden, uniform = harvested, safer.

## 4. Wind Direction

- Always confirm wind direction before committing:
  - Look at smoke, rivers, trees, crops, or other wings.
  - If unsure, make a slow circle above the field you want to land on to get a better look, make sure you have enough height to find a different field as an emergency landing in reach.
  - Land into wind for slower, controlled touch down.

## 5. Obstacles (Powerlines, Fences, Constructions)

- From above, look for poles and points where wires can be hung, now connect the poles and you will locate the wire→ likely powerlines, barb-wires, or paths.
- Expect hidden wires near villages and roads.
- Avoid fields with poles, buildings, or farm equipment.
- If unavoidable, plan to overshoot into open ground.

## 6. Time of Day & Thermal Strength

- Midday with strong thermals: landings can be turbulent, especially in small fields. Choose larger, open areas. Expect over and undershoot due to thermals influencing the wind speeds.
- Late afternoon: smoother, easier landings, but watch for valley winds.
- Evening: calm and predictable but check for downslope katabatic flows in mountains.

## 7. Emergency points

- If you have to choose between a sharp turn close to the ground or a tree, choose the tree.
- If its between a powerline and turn choose the turn, try to keep it timed and smooth
- Avoid top landings in the middle of the day since they are often thermal trigger points, and surprise turbulence can hit.

# Taking off at High altitudes

High-Altitude Take-off (e.g., mountains)

- Lower air density → Increase the amount of speed required to take off
- Longer take-off run needed
- Slower inflation and weaker pressure build-up
- Pilot fatigue increases (hypoxia, hypothermia)
- Higher stall speed



# Progress path

1. Guided XC (with instructor or experienced pilots)
  - Safest introduction to XC.
  - Learn how to choose lines, read terrain, find thermals, and manage retrieves.
  - Focus is on observing decision-making and flying in a group.
  - Builds confidence without overwhelming responsibility.
2. Small Transitions (within reach of landings)
  - Practice leaving the ridge/thermal source to cross small gaps, valleys, or spurs.
  - Always remain within glide of safe landings.
  - Goal: learn to judge glide ratios, wind drift, and valley flows.
  - This stage teaches how to “let go of the hill” and commit to moving.
3. Tailwind XC Flights
  - Choose days with smooth tailwinds.
  - Easier glides, longer distances with less energy.
  - Good for building mileage confidence.
  - Focus shifts to thermal chaining, decision points, and route planning.
4. Short “Go and Return” Flights
  - Fly downwind to a safe point, then turn around and come back (even a few km).
  - Teaches how conditions feel in both directions (tailwind vs. headwind).
  - Develops skills in timing transitions and energy management.
  - Builds confidence in leaving the comfort zone while ensuring return options.
5. Long Cross-Country Flights
  - Moving beyond local familiarity into new terrain.
  - Requires navigation, weather analysis, landing strategy, and retrieve planning.
  - Develops endurance, mental focus, and decision-making under pressure.
  - This stage is where most pilots discover their preferred XC style—distance chasing, scenic routes, or exploring.
6. Competitions (if interested)
  - Ideal for those seeking structured progression and rapid learning.
  - Fly tasks set by experienced organizers in a safe environment with retrieve.
  - Teaches speed-to-fly, gaggle flying, efficiency, and tactical decisions.
  - Great way to learn faster but requires strong thermal and wing-handling skills first.
7. Vol-Biv (Hike and Fly Adventures)
  - Highest form of XC freedom—carry gear, fly as far as conditions allow, land, camp, and continue.
  - Combines navigation, survival skills, weather reading, and self-sufficiency.
  - Demands strong XC experience, fitness, and mountain awareness.
  - More about journey and adventure than distance alone.

# IN FLIGHT TASKS



## **USE OF SPEED RANGE**

Put one foot on the bar to locate it then use both feet to symmetrically push the bar out. watch the riser pulleys get closer to each-other as a result of the AOA being lowered. To release slowly bend your knees and bring the bar back, now let it go and return to normal trim flight.


## **360° TURNS**

To perform a 360° turn simply weight shift the side you want to turn and the slowly apply the brake of the same side. feel the turn start and then move your gaze to the tip of the glider on the same side of the turn, observe its angle to the horizon and keep it there until its at 90°. Remember that you will be in an accelerated decent rate, keep your altitude in mind To exit slowly release the brake and as you come out of the turn gently reposition your weight in the center of the harness. If the turn does not come out with releasing the inside brake, slowly add a little of the outside brake to assist it.

## **DRIFT MANAGEMENT**

When flying with a wind that is crossed from the direction your glider is heading it often happens that your glider gets pushed down wind. It is important to maintain heading, so in order to do that we point to glider slightly into wind in order to maintain our ground trajectory.

The stronger the wind the more you will require to point into the wind to maintain the same trajectory over the ground

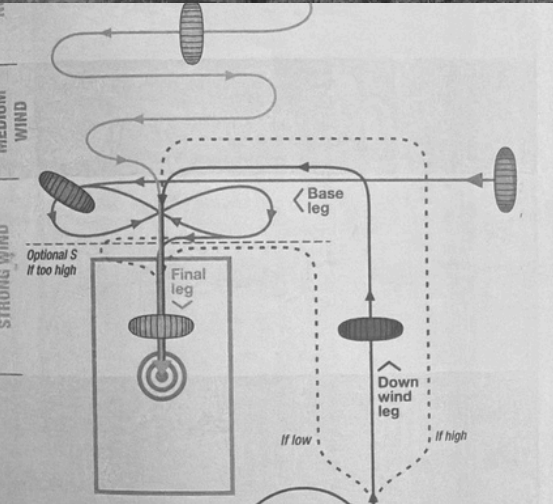

## BIG EARS

This technique is used to descend to the ground at a faster rate.

Find your outer A lines, they are usually on a separate outer A riser, follow the line visually all the way up the canopy, it should be connected to the outer part of the leading edge. Once you have confirmed that it is in fact the correct line, find the same line on the opposite side. Now pull down one side then the other. If done correctly the glider will look like the image to the left. Always pull one side after the other, pulling them together can cause a stall to occur.

To release, simply let go of the pulled lines one at a time, if the glider does not open up, pump one side after the other to send air from the trailing edge towards the front and opening up the collapse.

## BIG EARS AND SPEED BAR

After pulling big ears you can increase your forward speed and descent rate along with increasing the stability of the glider by applying speed bar.

Remember to always pull big ears then push speed bar in order to keep the glider stable when initiating the maneuver.

Release the speed bar first then let go of the big ears.

## U TURN AND FIGURE 8 LANDING APPROACHES

As discussed in the chapter/image of landing, pilots should be able to perform both landing techniques as independent pilots. We usually tend to use the figure 8 and S turn landings in any wind conditions while the U turn approach only in no wind or mild wind conditions.




# Active piloting





Active piloting in paragliding is the continuous process of anticipating, sensing, and correcting wing movements to maintain stability and control in changing air conditions. Unlike passive flying, where the pilot reacts only after a problem occurs, active piloting requires subtle, ongoing inputs on the brakes and weight shift to counter turbulence, collapses, and surges before they escalate. It involves reading the feedback from the wing—such as brake pressure, harness feel, and canopy pitch—while staying relaxed and connected to the glider. Good active piloting minimizes collapses, reduces energy loss, and makes flying safer and more efficient, especially in turbulent or thermic conditions.

# AIR LAW/ ANTI-COLISION RULES

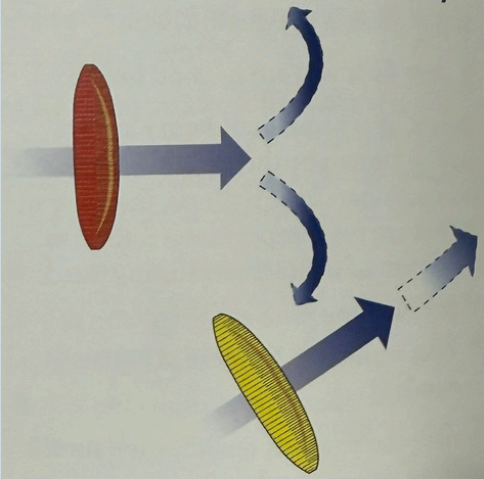


Over taking from right

Glider on the right has right of way

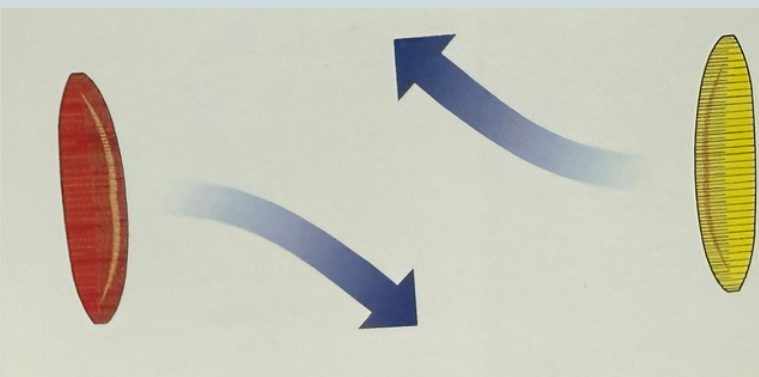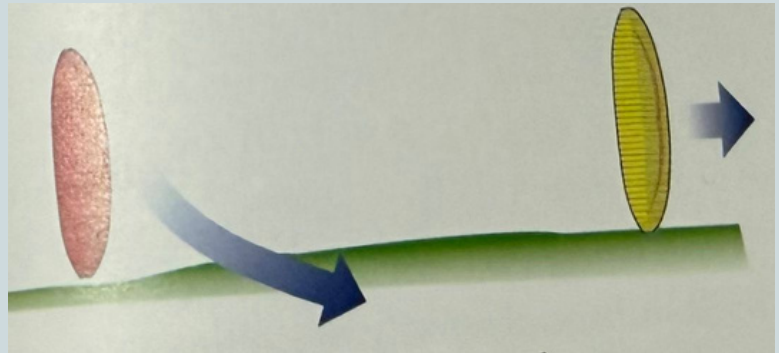


Both turn right

Lower pilot has the right of way

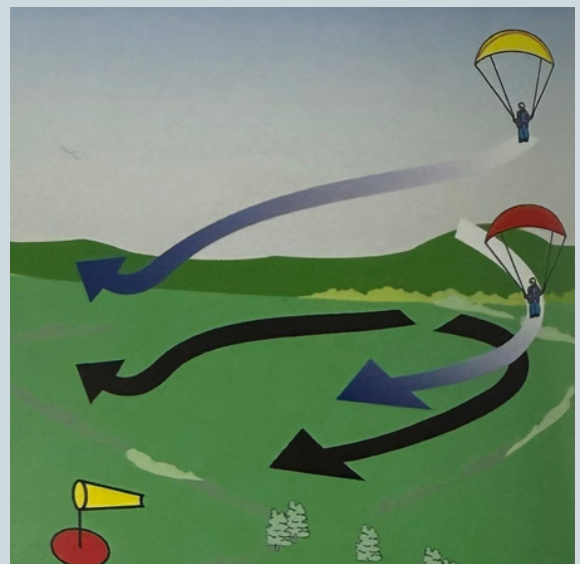

# FLIGHT CHARACTERISTICS

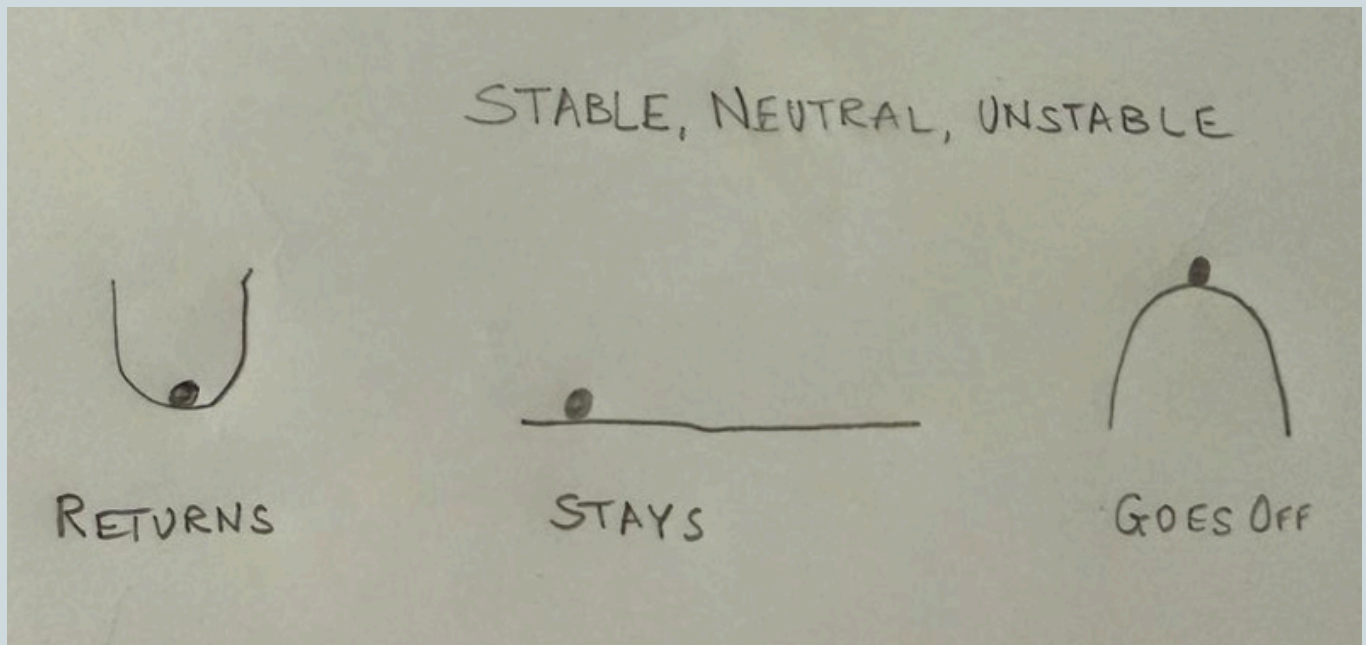

We often use the term stable/unstable in paragliding. For weather, for wings and of course for pilots, this is about our wings.

The above diagram completely explains what a stable, neutral and unstable system is. While flying in turbulent air, a glider returning to trim flight without any input is a stable glider often referred as passive safety. On the other end, if a glider has no or little tendency to return to trim flight, it has no or very little passive safety. Designers are always performing a balancing act as unfortunately, as of today, performance and safety seem to be at odds with each other. If one goes up, the other goes down. However, over the years, designers have managed to get both up to a large extent and today's wings are having better safety and better performance. Maybe one day, we will have super performance and super safety and world peace at the same time, who knows!!!

# Recovery methods



## Frontal/ symmetric

As soon as a frontal occurs, go hands up, after you swing under the glider wait to feel the glider dive, it is important to be ready to catch the dive.

## Asymmetric

The first thing to do here is to maintain directional control. Once you establish directional control and notice the glider has not opened up itself, simply pump the side of the glider that has deflated.



## Cravat

This occurs when a asymmetric collapse gets stuck in the lines of the glider. To remove this cravat, gain directional control with weight shift and brakes as required, then fins the stabilio of the side that's in the cravat and pull it inside till the glider is free, then release the line.

# Recovery methods



## spin

Go into full stall or backfly. Then exit it.

## Stall

Extend your hands fully and lock your elbows. Tuck your legs in. Wait for the glider to come overhead. From here, you can release the brakes slowly and evenly all the way up or lock them near the carabiners and go into backfly. Release fully and stop the dive.



## Autorotation

Weight shift to the other side. It will not be easy so be prepared and use your elbows to pull your weight to the other side. You can then apply opposite brake to exit,

# Human Factors

Human factors in paragliding are one of the most important aspects of safety and performance, often more critical than the equipment or weather alone. They refer to how human limitations, decision-making, psychology, and physiology affect flying. Here's a breakdown:

## 1. Decision-Making & Judgment

- Choosing when to fly, where to fly, and when to stop.
- Pressure to “get a flight” despite marginal or unsafe conditions (get-there-itis).
- Overconfidence after a few successful flights (beginner’s overestimation of skill).
- Misjudging weather or terrain due to inexperience.

## 2. Risk Perception & Attitude

- Optimism bias – “It won’t happen to me.”
- Risk homeostasis – pilots unconsciously adjust risk-taking to match their comfort zone.
- Peer pressure – flying because others are launching even if conditions don’t suit your skill level.

## 3. Situational Awareness

- Tracking wind strength, direction, thermal activity, other pilots, and terrain simultaneously.
- Losing awareness in stress, fatigue, or tunnel vision.
- Failure to plan escape routes or landing options.

## 4. Stress & Mental State

- Stress reduces cognitive function and reaction time.
- Anxiety can cause rushed launches or poor in-flight decisions.
- Relaxed but alert mindset is ideal—panic leads to mistakes.

## 5. Physical Condition

- Fatigue, dehydration, hunger, or illness reduce focus and stamina.
- Reaction times slow with exhaustion.
- Proper rest, hydration, and physical fitness improve safety margins.
- Carry plenty of water and some food as mentioned in the XC flying section

## 6. Communication & Learning

- Misunderstanding site rules, airspace regulations, or instructor feedback.
- Ego blocking learning—unwillingness to accept advice or admit mistakes.
- remember most pilots will help guide you towards safety, be open to feedback.
- Clear communication in group flying improves safety.

## 7. Experience & Skill Progression

- Pushing into cross-country or strong conditions too early.
- Incomplete training in maneuvers, collapses, or reserve deployment.
- Safe progression requires patience, mentoring, and self-awareness.

## 8. Cognitive Biases

- Confirmation bias – interpreting conditions as “flyable” because you want them to be.
- Normalization of deviance – getting used to risky behavior because “it worked last time.”
- Halo effect – assuming that because a skilled pilot launched, it must be safe for everyone.

## 9. Emergency Response

- Freeze, fight, or flight responses in unexpected collapses or turbulence.
- Tap your fingers in patterns or start humming a song in order to help your brain snap out of extreme fear, then refocus.
- Training reserve throws and SIV (Simulation d’Incident en Vol) helps build automatic responses.

# BUYING NEW EQUIPMENT

## Wing (Glider)

1. Certification – Choose wings with EN/LTF certification appropriate for your level (A = beginner, B = intermediate, C/D = advanced). Don't jump categories too soon.
2. Skill Match – A wing that's too advanced can be dangerous; a too-basic wing can limit progression.
3. Handling & Stability – Test-fly if possible. Check how forgiving it is in turbulence and collapse recovery.
4. Performance Needs – Decide between XC, hike-and-fly, acro, or soaring-specific wings.
5. Weight & Packability – Lighter wings are great for hike-and-fly but may compromise durability.
6. Fabric & Build Quality – Look for ripstop quality, stitching, and reinforcements in leading edge.
7. Resale Value – Popular, certified models from known brands usually hold value better.

## Harness

1. Type – Classic (with seat-board), pod (for XC), or lightweight (for hike & fly).
2. Comfort & Adjustability – You'll be sitting for hours; lumbar support matters.
3. Safety Features – Back protection (foam or airbag), side protection, and reserve container placement.
4. Weight & Portability – Depends if you prioritize comfort vs. hike-and-fly.
5. Storage – Enough space for instruments, hydration pack, and small gear.

## Reserve Parachute

1. Certification – EN/ LTF tested.
2. Size & Sink Rate – Must match your all-up weight (you + gear).
3. Type – Round, square, or steerable (rogallo). Square and steerable generally offer better descent control.
4. Deployment Ease – Reserve handle should be easy to grab with either hand.
5. Repack Frequency – Must be repacked at least once a year.

## Helmet

1. Certification – EN 966 (aerospots), not just a cycling/skating helmet.
2. Fit & Comfort – Snug but not tight; good ventilation.
3. Full-face vs. Open-face – Full-face offers more protection but less airflow.

## Instruments

1. Variometer (Vario) – Essential for thermal flying and XC.
2. GPS & Tracking – For navigation and safety.
3. Battery Life & Usability – Easy-to-read screen in sunlight, long-lasting power.

## Accessories

- Radio (VHF/Walkie) – For communication with instructors/other pilots.
- Gloves – Protection + warmth at altitude.
- Boots – Ankle support is critical for takeoff/landing safety.
- Flight Suit/Clothing – Windproof, layered for changing temperatures.
- Backpack – Comfortable, fits all gear, durable zippers.

## General Tips

- Buy from trusted dealers/brands – Avoid knock-offs or uncertified gear.
- Check warranty & service options – Some brands offer inspection services.
- Consider future progression – Buy gear that allows you to grow but doesn't outpace your skill.
- Test & Try – If possible, demo gear before purchase.
- Budget wisely – Prioritize wing + harness + reserve first, instruments and extras can be upgraded later

# BUYING SECOND HAND EQUIPMENT

## Wing (Glider)

- Age & Hours Flown
  - Fabric and lines degrade with UV, moisture, and use.
  - Under ~100 hours is usually okay.
- Porosity Test
  - Measures how much air passes through the fabric. Poor porosity = dangerous. Ask for a recent test report, not more than a month old.

## Line Condition

- Check for fraying, knots, or shrinkage. Lines should be straight and even.
- Ask if the lineset has been replaced (they wear out faster than the wing).
- Trim Check
  - Over time, line lengths change, affecting handling and safety. Ask if a trim check has been done.

## Certification & Model

- Ensure it's EN/LTF certified and suitable for your level.
- Avoid old competition wings.

## Repairs / Damage

- Small professional patch repairs are fine; avoid wings with leading-edge tears, canopy delamination, or big DIY fixes.
- make sure all damage is addressed by a professional before buying.

## Harness

- Age & Condition
- Check stitching, straps, buckles, and webbing for wear.
- Seat board (if any) should be free of cracks.
- Back Protection
  - Foam or airbag must be intact. A compressed or punctured back protector should be replaced.
- Comfort & Adjustability
- Try it on, hang-test if possible. Make sure reserve container and handle are in good condition.

## Reserve Parachute

- Age & Repack History
  - Fabric and rubber bands degrade even if unused. Generally replace after 10 years.
  - Must have been repacked within the last 12 months.
- Deployment System
  - Check handle, pins, and bridles. Practice a simulated throw to ensure smooth deployment.

## Helmet

- Certification – Must be EN 966 (aerospots).
- Crash History – Never buy a helmet that's been in a serious impact.

## Instruments

- Battery Life – Old instruments often have weak batteries.
- Screen Condition – Readable in sunlight, no pixel issues.
- Software – Check if updates are still supported.

## Other Accessories

- Radio – Test transmission quality.
- Boots & Gloves – Check for wear and tear.



# EQUIPMENT MAINTANANCE

## Laser trim tuning

- measuring the line lengths and comparing it the original line lengths
- Changes are made to maintain the original angle of attack and right left balance
- Loops like the bellow image are used to adjust the line lengths at the carabiner
- Un-sheeted lines can be Spliced to make minor changes



- It is recommended to get your glider trim checked every year or every 100 hours. look at the glider manual in order to check the requirement for your specific glider
- Send the glider to a professional, and make sure to ask for a report with the new and old line lengths mentioned

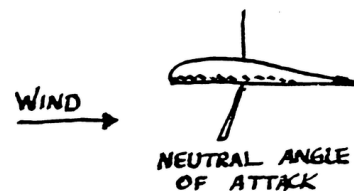




### Reserve repack

- Repacking the reserve helps maintain its opening speed. In case you deploy close to the ground you want the reserve to open as fast as possible.
- The old nylon rubber-bands are also replaced by new ones.
- The fabric gains new memory and is checked for condition and damage
- If the opening bands have lost their elasticity they can also be replaced at this time
- Repacking should be done every 1 year as a rule of thumb.
- If there is a crash landing or water landing, it is a smart idea to repack to make sure everything is good.



### Line strength check

- As gliders age UV and other environmental factors slowly damage the line, causing it to lose its strength.
- Once the glider is 5 years old get the line strength checked to ensure that the lines won't snap in flight

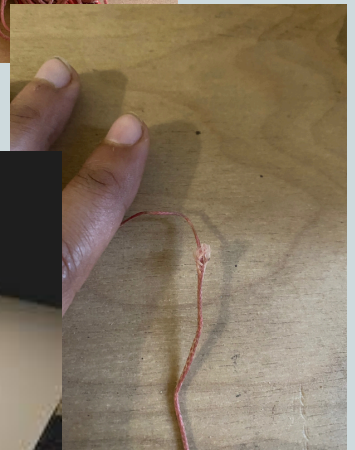



### Glider cleaning and visual check

- Clean your glider annually in order to remove dirt and other objects that may have entered the cell openings of the glider. it is recommended to do this every time anything goes into your glider but should be done at-leas 1 time a year
- When conducting the cleaning remember to check for any damage to the fabric, lines and risers
- if any damage is found do not fly the glider till it is repaired



### Fabric strength test

- This is done using a Betsometer
- This measures weather the glider fabric can take to load and stress specified by the company
- This to is recommended to be done annually

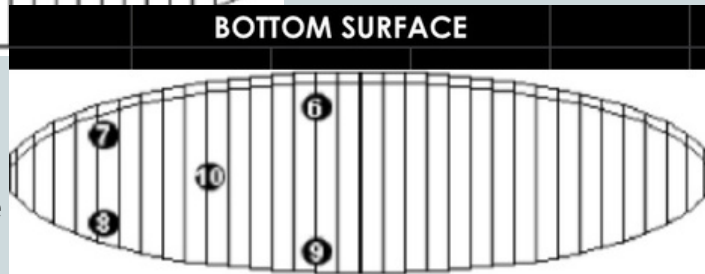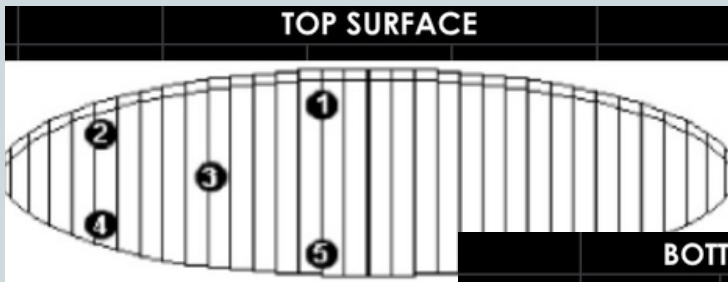

### Porosity test

- This measures the amount time the glider fabric can hold in a set amount of air.
- The longer the fabric can hold out the better condition it is in.

- This test is recommended annually for the first 2 years. Then should be conducted according to the deterioration rate. A professional will be able to guide you correctly


### Harness- Visual check and repairs

- if you have had a accident landing or landed on your harness, conduct a visual check after moving away from the landing area but before packing your equipment.
- If any damage is found get it repaired before flying the harness



# Air space depiction

Each country has different airspace rules. This can give you a brief idea of what the airspace classifications and rules look like.

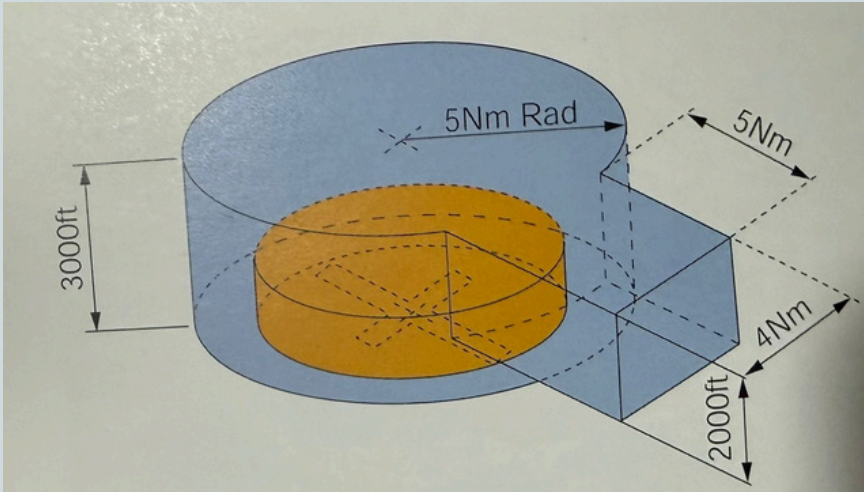

Airspace Classification (Not to scale)						
	Class A	Class B	Class C	Class D	Class E	Class G
<b>Altitude</b>	18,000' MSL to FL 600	14,500' MSL to 18,000' MSL	1,200' AGL to 14,500' MSL	700' AGL to 1,200' AGL	1,200' AGL to 14,500' MSL	0' to 1,200' AGL
<b>Entry Requirements</b>	ATC clearance	ATC clearance	Prior two-way communications	Prior two-way communications	Prior two-way communications*	None
<b>Minimum Pilot Qualifications</b>	Instrument Rating	Private or Student certification—local restrictions apply.	Student certificate	Student certificate	Student certificate	Student certificate
<b>Two-Way Radio Communications</b>	Yes	Yes	Yes	Yes	Yes, under IFR flight plan*	None
<b>Special VFR Allowed</b>	No	Yes	Yes	Yes	Yes	N/A
<b>VFR Visibility Minimum</b>	N/A	3 statute miles	3 statute miles	3 statute miles	3 statute miles**	1 statute mile†
<b>VFR Minimum Distance from Clouds</b>	N/A	Clear of clouds	500' below, 1,000' above, 2,000' horizontal	500' below, 1,000' above, 2,000' horizontal	500' below,** 1,000' above, 2,000' horizontal	Clear of cloudst
<b>VFR Aircraft Separation</b>	N/A	All	IFR aircraft	Runway operations	None	None
<b>Traffic Advisories</b>	Yes	Yes	Yes	Workload permitting	Workload permitting	Workload permitting
<b>Airport Application</b>	N/A	• Radar • Instrument approaches • Weather • Control tower • High density	• Radar • Instrument approaches • Weather • Control tower	• Instrument approaches • Weather • Control tower	• Instrument approaches • Weather	• Control tower

\*Exception: temporary tower or control tower present  
 \*\*True only below 10,000 feet  
 †True only during day at or below 1,200 feet AGL (see 14 CFR part 91)

AGL—above ground level  
 FL—flight level  
 MSL—mean sea level

# Key Regulatory Bodies & Policies in INDIA

## Organizations involved

1. Air Sports Federation of India (ASFI) – Under new policy as the apex oversight body for aero-sports. ACI is the body under ASFI for paragliding and Paragliding Association of India is waiting for a formal recognition from them to be the regulatory body for Paragliding.
2. National Air Sports Policy (NASP), 2022 – A specific policy introduced to govern and promote air sports (including paragliding, powered paragliding, etc.).

## ✂️ What NASP 2022 Affects (for Paragliding / Air Sports)

1. Defines “air sports” broadly: includes paragliding, paramotoring, hang gliding, powered hang gliding, etc.
2. Requires that all necessary clearances be obtained at least 24 hours in advance before doing any air sports activity.
3. Allows for creation of segregated airspaces specifically for air sports, with safety/security/national-security review. If approved, those will get published in the Aeronautical Information Publication (AIP).
4. Violations under this policy can lead to penalties up to ₹50,000.

## 🌐🛫 Airspace Use, Permissions & Safety Norms - Digitalsky

1. Paragliding / air sports flights cannot take place without getting clearances, especially when close to airports or in controlled airspace, or in areas impacted by national security restrictions. NASP envisages SOPs, ATC/air traffic control involvement, etc.
2. For gliding: AIP-India has minimum visibility, cloud base, and wind speed limitations for glider operations at aerodromes. E.g. no gliding when cloud base < ~450 m (1500 ft) AGL, visibility less than 5 km, or wind speed more than ~17 knots. aim-india.aai.aero
3. Gliders must coordinate with ATC when operating in controlled airspace / at aerodromes. aim-india.aai.aero+1

## 🌟 Other Important Local / State-Level Rules

1. Some states / districts have additional regulations: e.g., Goa now requires operators in aero sports (paragliding, paramotoring, etc.) to provide insurance for pilot/passenger.
2. Local regulatory committees are being set up in some places (e.g. Kangra district in Himachal) to oversee paragliding operations, fare limits, operator liabilities etc.
3. Zones around airports sometimes have “free flight zones” where paragliding / flying of balloons / airborne activities are banned or restricted for certain periods. Example: Mumbai had a ban for 60 days in a “free flight zone” around the airport.

## NOTAMS- notice to airman

- These are sent by telecommunication systems and found on the updated airspace charts of the area.
- They state the time the notam is active for, if changes to the notam are required the notam is simply replaced by a new notam.
- It is important to check notams regularly to make sure you do not end up in a mid air with other aircrafts and to avoid prison since it is illegal to fly in an area that states restricted zones

# References

This PDF is a compilation from a lot of books and websites, some of which are mentioned below.

It is only meant for the students of Paragliding Bawas to be used as a guide in the course

- 1 HPAC**
- 2 APPI**
- 3 BHPA**
- 4 XC mag**
- 5 USHPA**
- 6 Touching cloud base**
- 7 Thermal flying**
- 8 Windy (forecasting apps)**
- 9 PAI**
- 10 Digital-Sky.s (Indian airspace)**